

VOLVO CONSTRUCTION EQUIPMENT

# PRODUCT RANGE GUIDE



MORE CARE. BUILT IN.





# MORE CARE. BUILT IN.



Volvo Construction Equipment is a major international company developing, manufacturing and marketing equipment for the construction and related industries. Its products, leaders in many world markets, include a comprehensive range of wheel loaders, hydraulic excavators, articulated haulers, motor graders, compact construction equipment, compaction and paving equipment.

We take a great deal of pride in the equipment we build for you...to help you build your business. Descriptions of that equipment are presented here with basic specifications. For complete information on our products, please call us or visit our unique Volvo Construction Equipment Internet website at [www.volvoce.com](http://www.volvoce.com). We are available for all of your construction equipment needs, and the way you build your fleet has never been easier, faster or more productive.

## **The Volvo Group.**

Volvo Construction Equipment is a member of the Volvo Group, companies under the corporate flag of AB Volvo, Sweden, and world-leading manufacturers of trucks, buses, construction equipment, marine and industrial engines, and aerospace systems and components.

# VOLVO ARTICULATED HAULERS



## **The first articulated hauler in the world – best selling articulated hauler in the world. Here's why.**

1966, Volvo built the first articulated hauler in the world. For over 40 years, each new generation since has been the best selling artic in the world. For good reason. Volvo articulated haulers give you new ways to increase productivity and reduce operating costs...with high engine power and torque...superb serviceability...unparalleled downhill and braking performance...the best three-point suspension in the business...leading technology. The Volvo articulated hauler line includes 4x4 and 6x6 wheel configurations with payload capacities ranging from 26.5 tons to 43 tons.

Volvo haulers perform in the most treacherous working conditions, moving large volumes of material through fast cycle times in areas where roads do not exist, while maintaining higher than average speeds on haul roads. They are precisely what you need when you are at work in some of the roughest places on earth.

	<b>A25E</b>	<b>A30E</b>	<b>A35E</b>	<b>A40E</b>
<b>ENGINE</b>	D9B AAE3	D9B ADE3	D12D AAE3	D16D ABE3 16L
<b>Gross HP</b>	305 hp (224 kW)	343 hp (252 kW)	419 hp (313 kW)	469 hp (350 kW)
<b>Max Torque</b>	1254 ft-lb (1700 Nm)	1254 ft-lb (1700 Nm)	1549 ft-lb (2100 Nm)	1862 ft-lb (2525 Nm)
<b>Displacement</b>	574 ci / (9.4 l)	574 ci / (9.4 l)	732 ci / (12 l)	976 ci / (16 l)
<b>TRANSMISSION</b>	Planetary	Planetary	Planetary	Planetary
<b>Make/Model</b>	Volvo PT 1562	Volvo PT 1562	Volvo PT 2509	Volvo PT 2509
<b>Gears</b>	6/2	6/2	9/3	9/3
<b>Top Speed</b>	32.9 mph (53 km)	32.9 mph (53 km)	35.4 mph (57 km)	35.4 mph (57 km)
<b>DROPBOX</b>				
<b>Make/Model</b>	Volvo IL 1	Volvo IL 1	Volvo IL 2	Volvo IL 2
<b>Speeds</b>	Single Stage	Single Stage	Single Stage	Single Stage
<b>DIFF LOCKS</b>	100% dog clutch	100% dog clutch	100% dog clutch	100% dog clutch
<b>STEERING TYPE</b>	Hydromech	Hydromech	Hydromech	Hydromech
<b>BODY</b>	HB400	HB400	HB400	HB400
<b>Payload</b>	26.5 tons	31.0 tons	37.0 tons	43.0 tons
<b>Volume</b>	19.6 yd <sup>3</sup>	22.9 yd <sup>3</sup>	26.8 yd <sup>3</sup>	31.4 yd <sup>3</sup>
<b>Dump Angle</b>	74	70	70	72
<b>Body Up/Down</b>	12/9	12/9	12/10	12/10
<b>BRAKES</b>	6 wheel dry-disc	6 wheel dry-disc	6 wheel wet-disc	6 wheel wet-disc
<b>Actuation</b>	Air/Oil	Air/Oil	Oil	Oil
<b>RETARDERS</b>	Engine / Trans	Engine / Trans	Engine	Engine
<b>SUSPENSION</b>				
<b>Front</b>	Rubber/Shocks Three Point	Rubber/Shocks Three Point	Rubber/Shocks Three Point	Rubber/Shocks Three Point
<b>Rear</b>	Mech/Rubber Three Point	Mech/Rubber Three Point	Mech/Rubber Three Point	Mech/Rubber Three Point
<b>TIRES</b>				
<b>Standard</b>	23.5R25	750/65R25*	26.5R25	29.5R25
<b>(optional)</b>	-	(23.5R25)	(775/65R29)**	(875/65R29)***
<b>GRND. PRESS.</b>	-	(*with 750/65R25)	(**with 775/65R29)	(***with 875/65R29)
<b>Front</b>	20.9 psi 144 (kPA)	17.5 psi* 121 (kPA)	18.4 psi** 127 (kPA)	19.6 psi*** 135 (kPA)
<b>Rear</b>	23.1 psi 159 (kPA)	21.2 psi* 146 (kPA)	22.8 psi** 157 (kPA)	24.9 psi*** 172 (kPA)
<b>GVW</b>	100,440 lbs 45 560 (kg)	112,570 lbs 51 060 (kg)	135,805 lbs 61 600 (kg)	152,560 lbs 69 200 (kg)
<b>HP/Ton</b>	6.0	6.0	6.1	6.1

# VOLVO COMPACT EXCAVATORS



## A versatile box of tools.

If you work where size, maneuverability, reliability, strength, versatility, cost-effectiveness and efficiency are major factors, Volvo compact excavators are an absolute necessity.

The Volvo compact excavator range develops an impressive level of performance and productivity through a number of technological advances... boom offset to work alongside walls...two travel speeds...direct slew drive... variable-width chassis...quick change attachment bracket for speedy job changes...control pattern selector for either excavator (ISO) or backhoe (SAE) operation...a tilting counterweight that provides both optimum machine protection and easy access to the engine...simultaneous digging and high speed operations for faster cycle times...all in all – the most efficient compact excavators on the market today.

	Engine	Weight	
		Canopy	Cab
<b>EC15BXTV</b> (variable width undercarriage)	15.2 hp / (11.3 kW)	3539 lbs (1637 kg)	3826 lbs (1761 kg)
<b>EC20BXTV</b> (variable width undercarriage)	15.2 hp / (11.3 kW)	3848 lbs (1745 kg)	4134 lbs (1875 kg)
<b>EC25</b>	22.9 hp / (17.1 kW)	5874 lbs (2664 kg)	6152 lbs (2790 kg)
<b>EC35C</b>	36.3 hp / (27.1 kW)	7573 lbs (3435 kg)	7859 lbs (3565 kg)
<b>EC55B Pro</b>	50 hp / (37 kW)	N/A	12,125 lbs (5500 kg)

	Digging Depth	Breakout Force	Tearout Force
<b>EC15BXTV</b> (variable width undercarriage)	6' 9" / (2050 mm)	3394 lbf	2158 lbf
<b>EC20BXTV</b> (variable width undercarriage)	7' 9" / (2350 mm)	4159 lbf	2810 lbf
<b>EC25</b>	8' 3" / (2520 mm)	4900 lbf	3350 lbf
<b>EC35C</b>	10' 5" / (3170 mm)	6554 lbf	5033 lbf
<b>EC55B Pro</b>	12' 5" / (3820 mm)	8992 lbf	6519 lbf

EC35C

# VOLVO SHORT RADIUS COMPACT EXCAVATORS



## Turning tight work sites into comfort zones.

The Volvo short radius compact excavators have been designed to meet the needs of operators who work in confining, narrow and restricted-space sites. The compact excavators, with their uniquely designed swing system, offer maneuverability, enhanced safety and expanded job opportunities.

Operator comfort is a key feature of the new excavator...visibility and safety are vastly improved...operator controls are suspended with the seat and fitted with ergonomic armrests...noise levels are dramatically reduced...new-generation direct injection, 16-valve Volvo engines provide excellent performance...an auto-idling system gives you lower fuel consumption, less noise, longer engine life...the \*CCLS hydraulic system supplies power and flow to the cylinders as needed...breakout and tearout forces are impressive...and service is easy and practical...it's an exceptional piece of equipment.

\*CCLS: closed center load sensing

	Weight		
	Engine	Canopy	Cab
<b>ECR28</b>	19.3 hp / (14.4 kW)	3539 lbs	6219 lbs / (2821 kg)
<b>ECR38</b>	27.6 hp / (20.3 kW)	3848 lbs	7561 lbs / (3400 kg)
<b>ECR48C</b>	34.9 hp / (26 kW)	5874 lbs	10,692 lbs / (4850 kg)
<b>ECR58</b>	52 hp / (38.2 kW)	N/A	12,863 lbs / (5880 kg)
<b>ECR88</b>	59 hp / (43.8 kW)	N/A	18,629 lbs / (8450 kg)

	Digging Depth	Dig Force Dipper	Dig Force Bucket	Tail Swing Radius
<b>ECR28</b>	7' 8" (2380 mm)	3282 lbs (1489 kg)	4429 lbs (2009 kg)	29.5" (749 mm)
<b>ECR38</b>	9" (2740 mm)	4305 lbs (1953 kg)	6463 lbs (2932 kg)	31.9" (810 mm)
<b>ECR48C</b>	12' 0" (3660 mm)	5724 lbs (2596 kg)	7691 lbs (3488 kg)	38.3" (974 mm)
<b>ECR58</b>	11' 8" (3600 mm)	6070 lbs (2753 kg)	8768 lbs (3978 kg)	39.4 (1001 mm)
<b>ECR88</b>	13' 7" (4170 mm)	9217 lbs (4181 kg)	13,623 lbs (5900 kg)	47.6" (1209 mm)

# VOLVO COMPACT WHEEL LOADERS



## Tools of the trade...tools you can trust.

Super-quiet, super-efficient, super-powerful Volvo compact wheel loaders satisfy your toughest demands on the jobsite. The Volvo compact wheel loader's versatility far exceeds the norm...a quick change bracket and a selection of more than 60 attachments are standard...articulating-oscillating steering creates high maneuverability...efficient loader linkage systems add power to the working cycles...100% front and rear diff-locks provide superb mobility in rough terrain...integrated electronics with diagnostic functions... spacious comfortable cabs with excellent visibility for greater safety and efficiency. This is more than just a wheel loader – it's a Volvo All-rounder that can replace an entire fleet of expensive machines...on the farm, on construction sites and landscaping jobs, on the docks, in the lumberyards and quarries – wherever you work...whatever you do.

	<b>Weight (cab)</b>	<b>Bucket Range</b>	<b>Engine Net HP</b>
<b>L20B</b>	9,945 lbs (4511 kg)	0.75-1.25 yds <sup>3</sup> (0.57-.95 m <sup>3</sup> )	54 hp / (40 kW)
<b>L25B</b>	10,650 lbs (4830 kg)	1-1.6 yds <sup>3</sup> (0.85-1.2 m <sup>3</sup> )	60 hp / (44 kW)
<b>L30B PRO</b>	12,040 lbs (5461 kg)	1.3-2.0 yds <sup>3</sup> (1.0-1.5 m <sup>3</sup> )	68 hp / (50 kW)
<b>L35B PRO</b>	13,710 lbs (6219 kg)	1.4-2.3 yds <sup>3</sup> (1.2-1.8 m <sup>3</sup> )	75 hp / (55 kW)
<b>L40B</b>	17,417 lbs (7900 kg)	1.6-3.3 yds <sup>3</sup> (1.2-2.5 m <sup>3</sup> )	94 hp / (69 kW)
<b>L45B</b>	18,518 lbs (8400 kg)	1.8-3.3 yds <sup>3</sup> (1.4-2.5 m <sup>3</sup> )	99 hp / (73 kW)

	<b>Full-turn tip load with bucket</b>	<b>Payload 80% transport position 40° full-turn (with forks)</b>	<b>Dump Height</b>
<b>L20B</b>	6,175 lbs (2801 kg)	4,850 lbs (2200 kg)	8' 3" / (2510 mm)
<b>L25B</b>	7,496 lbs (3400 kg)	5,512 lbs (2500 kg)	8' 2" / (2490 mm)
<b>L30B Pro</b>	8,490 lbs (3851 kg)	5,512 lb (2500 kg)	8' 4" / (2545 mm)
<b>L35B Pro</b>	9,480 lbs (4300 kg)	5,512 lbs (2500 kg)	8' 9" / (2655 mm)
<b>L40B</b>	10,250 lbs (4650 kg)	8,157 lbs (3700 kg)	9' / (2740 mm)
<b>L45B</b>	11,570 lbs (5250 kg)	8,157 lbs (3700 kg)	9' 1" / (2780 mm)

# VOLVO BACKHOE LOADERS




## A tough machine from Volvo Construction Equipment.

Volvo assembled a team of backhoe loader experts from around the world to help develop the machine. The team, in turn, utilized customer input at every phase of the development through a series of head-to-head backhoe loader field trials and customer clinics around the world. The trials helped Volvo discover what customers wanted – and what they didn't. The result is a backhoe loader that makes no compromises – at either end of the machine.

Features available on the BL70, include:

- Pilot controls standard for the backhoe (mechanical controls available as an option)
- Hydraulic loader attachment bracket
- New loader joystick control featuring proportional switch for auxiliary hydraulics
- Powershift transmission option

Look for more information on the Volvo Backhoe Loaders at your local Volvo Construction Equipment dealer, and see what a backhoe looks like from your point of view.

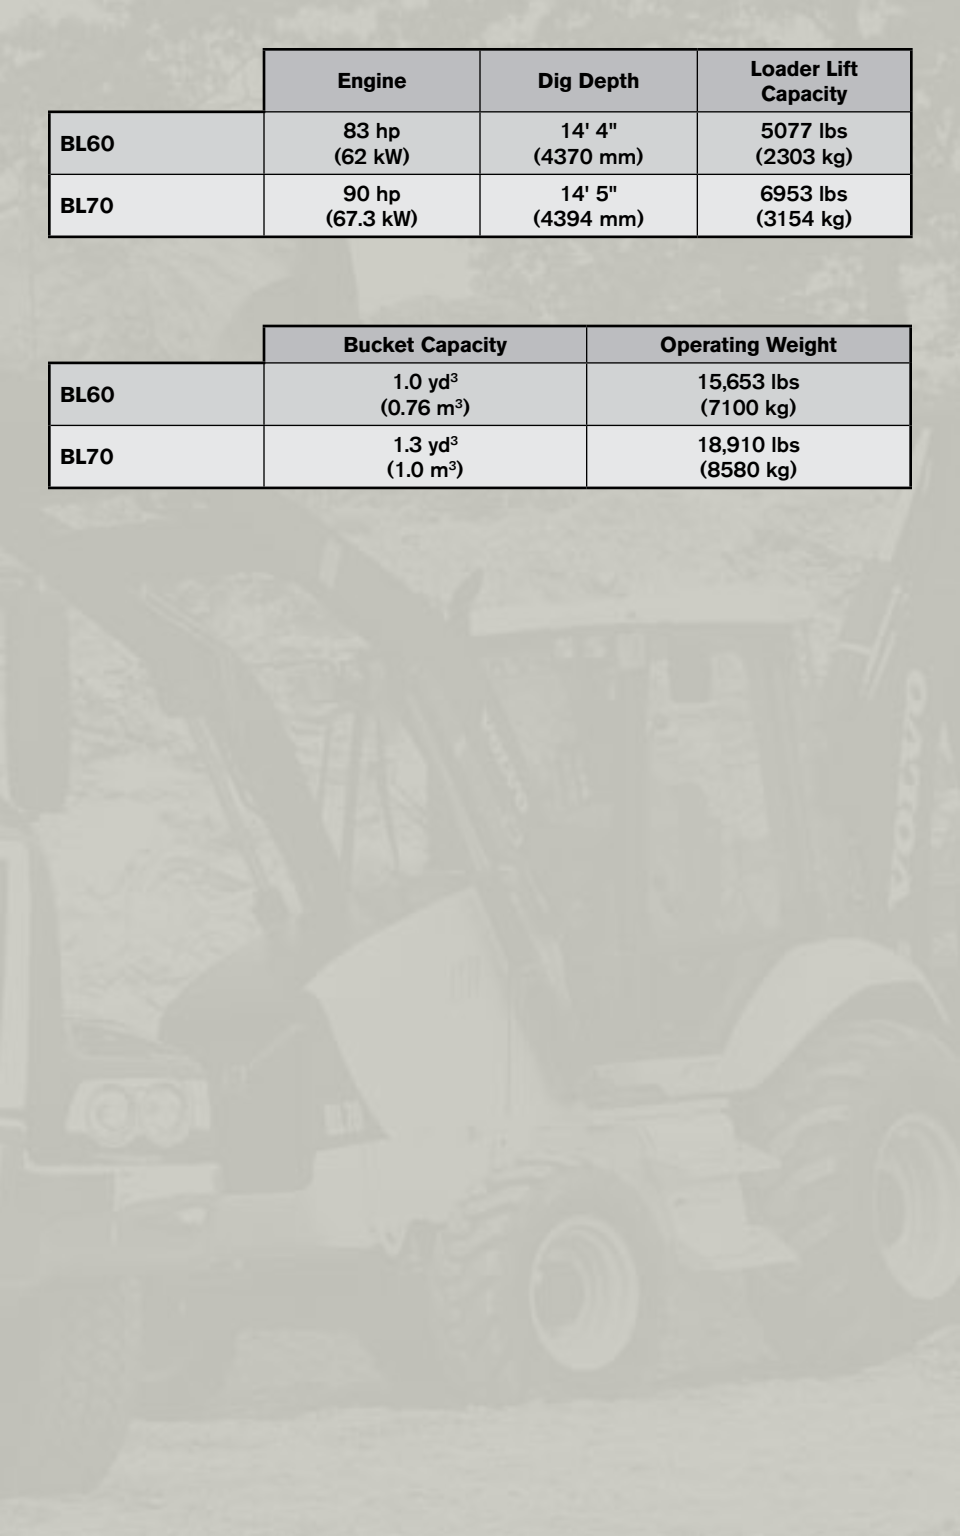

	<b>Engine</b>	<b>Dig Depth</b>	<b>Loader Lift Capacity</b>
<b>BL60</b>	83 hp (62 kW)	14' 4" (4370 mm)	5077 lbs (2303 kg)
<b>BL70</b>	90 hp (67.3 kW)	14' 5" (4394 mm)	6953 lbs (3154 kg)

	<b>Bucket Capacity</b>	<b>Operating Weight</b>
<b>BL60</b>	1.0 yd <sup>3</sup> (0.76 m <sup>3</sup> )	15,653 lbs (7100 kg)
<b>BL70</b>	1.3 yd <sup>3</sup> (1.0 m <sup>3</sup> )	18,910 lbs (8580 kg)

# VOLVO SKID STEERS



## **Volvo Construction Equipment continues to meet your needs.**

The Volvo B-Series skid steers offer rugged dependability and the ultimate in operator comfort with a super-comfort, high-back seat and your choice of controls—traditional hand and foot controls or pilot-operated joystick controls. The Volvo B-Series features a wide, tall opening into the operator's area, making it easy for the frequent exits and entries demanded by job conditions.

Volvo skid steer loaders also provide outstanding visibility in all directions: forward, to the cutting edge; sideways, to the tires; up, through the huge top window for truck loading; and to the rear, for superior maneuverability in confined jobsite conditions.

Safety is a Volvo core value, so the B-Series is designed so that the hydraulics will not function and the brake is set until the operator lowers the seat bar and presses the hydraulic release button.

Versatility is why skid steer loaders exist, and the Volvo B-Series will not disappoint you. It features the industry-standard universal quick-attach to allow hook up to almost all brands and types of skid steer attachments—breakers, augers, buckets, forks, grapples, sweepers, power rakes...the list goes on and on.

	<b>Engine Net HP</b>	<b>Operating Capacity</b>	<b>Operating Weight</b>	<b>Height to Hinge Pin</b>
<b>MC60B</b>	45.3 hp (33.7 kW)	1400 lb (635 kg)	5624 lb (2552 kg)	114" (2896 mm)
<b>MC70B</b>	53.0 hp (39.5 kW)	1500 lb (682 kg)	5801 lb (2632 kg)	114" (2896 mm)
<b>MC80B</b>	65.2 hp (48.6 kW)	1850 lb (839 kg)	6824 lb (3096 kg)	121" (3075 mm)
<b>MC90B</b>	80.5 hp (60.0 kW)	2000 lb (907 kg)	6985 lb (3169 kg)	121" (3075 mm)
<b>MC110B</b>	80.5 hp (60.0 kW)	2400 lb (1089 kg)	7480 lb (3394 kg)	121" (3075 mm)



# VOLVO EXCAVATORS



## **Volvo excavators deliver maximum performance, maximum productivity.**

Among the fastest and most powerful excavators in the world, Volvo excavators are tough, reliable, productive, and provide high performance and superior operator comfort for greater efficiency. They represent the latest in engineering research, design and development.

All Volvo excavators feature the Volvo-exclusive Advanced Control System (ACS) which balances engine power with hydraulic pump output to provide maximum production with minimal fuel consumption. Their superb digging and lifting forces are the result of the high torque engine and its ability to drive a unique hydraulic system so that both high pressure and flow are achieved.

The Volvo hydraulic quick-coupler system makes it possible to change attachments quickly and easily from inside the roomy, comfortable and quiet cab – and adds a great deal of flexibility to your work requirements.

	<b>Engine</b>	<b>Engine HP (net) SAE J1349</b>	<b>Bucket Capa</b>
<b>EC140CL</b>	Volvo D4E	92 hp / (69 kW)	0.62~1.21 y (0.48~0.93 r)
<b>ECR145CL</b>	Volvo D4E	92 hp / (69 kW)	0.69~1.14 y (0.53~0.88 r)
<b>EC160CL</b>	Volvo D6E	87 hp / (118 kW)	0.92~1.47 y (0.70~1.12 r)
<b>EC210CL</b>	Volvo D6E	147 hp / (110 kW)	1.08~1.86 y (0.83~1.43 r)
<b>ECR235CL</b>	Volvo D6E	147 hp / (110 kW)	1.35~1.81 y (1.03~1.38 r)
<b>EC240CL</b>	Volvo D7E	168 hp / (125 kW)	1.37~2.39 y (1.05~1.83 r)
<b>EC290CL</b>	Volvo D7E	192 hp / (143 kW)	1.50~2.55 y (1.15~1.95m)
<b>EC330CL</b>	Volvo D12D	247 hp / (184 kW)	2.32~3.07 y (1.77~2.35 r)
<b>EC360CL</b>	Volvo D12D	247 hp / (184 kW)	2.19~3.63 y (1.67~2.77 r)
<b>EC460CL</b>	Volvo D12D	315 hp / (235 kW)	2.32~4.97 y (1.77~3.80 r)
<b>EC700CL</b>	Volvo D16	424 hp / (316 kW)	3.2~8.63 y (2.43~6.60 r)

	<b>Reach (max.)</b>	<b>Digging Depth (max.)</b>	<b>Breakout Force SAE J1179</b>
<b>EC140CL</b>	27' 4" / (8,300 mm)	18' 2" / (5,530 mm)	19,620 lbs / (87.3)
<b>ECR145CL</b>	27' 5" / (8,400 mm)	18' 2" / (5,540 mm)	21,700 lbs / (96.5)
<b>EC160CL</b>	29' 5" / (9,000 mm)	19' 10" / (6,040 mm)	23,660 lbs / (105.)
<b>EC210CL</b>	32' 7" / (9,900 mm)	22' 1" / (6,730 mm)	29,310 lbs / (130.)
<b>ECR235CL</b>	32' 5" / (9,900 mm)	22' 2" / (6,750 mm)	28,030 lbs / (124.)
<b>EC240CL</b>	33' 8" / (10,300 mm)	22' 11" / (6,980 mm)	35,280 lbs / (156.)
<b>EC290CL</b>	37' 0" / (11,300 mm)	26' 2" / (7,980 mm)	38,810 lbs / (173.)
<b>EC330CL</b>	36' 1" / (11,000 mm)	24' 7" / (7,490 mm)	47,190 lbs / (209.)
<b>EC360CL</b>	36' 8" / (11,200 mm)	24' 7" / (7,490 mm)	47,190 lbs / (209.)
<b>EC460CL</b>	39' 4" / (12,000 mm)	24' 10" / (7,570 mm)	54,900 lbs / (244.)
<b>EC700CL</b>	43' 3" / (13,200 mm)	27' 7" / (8,400 mm)	80,030 lbs / (356.)

Capacity	Lifting Capacity Along Undercarriage at Reach/Height	
3 d <sup>3</sup> (n <sup>3</sup> )	3.3 t 6.0/1.5 m	7,410 lb 20'/5' ft
3 d <sup>3</sup> (n <sup>3</sup> )	3.5 t 6.0/1.5 m	7,730 lb 20'/5' ft
3 d <sup>3</sup> (n <sup>3</sup> )	5.1 t 6.0/1.5 m	11,244 lb 20'/5' ft
3 d <sup>3</sup> (n <sup>3</sup> )	7.7 t 6.0/1.5 m	16,770 lb 20'/5' ft
3 d <sup>3</sup> (n <sup>3</sup> )	8.3 t 6.0/1.5 m	17,900 lb 20'/5' ft
3 d <sup>3</sup> (n <sup>3</sup> )	9.1 t 6.0/1.5 m	19,690 lb 20'/5' ft
3 d <sup>3</sup> (n <sup>3</sup> )	10.8 t 6.0/1.5 m	23,370 lb 20'/5' ft
3 d <sup>3</sup> (n <sup>3</sup> )	10.9 t 7.5/1.5 m	23,630 lb 25'/5' ft
3 d <sup>3</sup> (n <sup>3</sup> )	11.3 t 7.5/1.5 m	25,840 lb 25'/5' ft
3 d <sup>3</sup> (n <sup>3</sup> )	13.8 t 7.5/1.5 m	29,820 lb 25'/5' ft
3 d <sup>3</sup> (n <sup>3</sup> )	16.3 t 9.0/1.5 m	36,050 lb 30'/5' ft

Capacity	Operating Weight
18 kN	27,780~33,950 lbs / (12.6~15.4 t)
25 kN	32,540~34,880 lbs / (14.8~15.8 t)
32 kN	37,830~42,760 lbs / (17.2~19.4 t)
44 kN	46,920~48,470 lbs / (21.3~22 t)
57 kN	52,470~57,760 lbs / (23.8~26.2 t)
69 kN	55,830~57,750 lbs / (25.2~26.2 t)
80 kN	64,340~67,210 lbs / (29.2~30.5 t)
90 kN	78,450~81,590 lbs / (35.6~37.0 t)
100 kN	84,670~87,540 lbs / (38.4~39.7 t)
120 kN	100,550~108,090 lbs / (45.6~49.0 t)
150 kN)*	150,600~155,650 lbs / (68.3~70.6 t)



# VOLVO EXCAVATORS – WHEELED AND SEGMENT SOLUTIONS



## Every Volvo is special. Now New Solutions for specific needs.

Since 1927, the Volvo standard of value has been built around a cornerstone of excellence. Volvo Construction Equipment remains a global leader in innovation, quality, productivity, safety, and environmental care.

Volvo Excavator Solutions provide purpose-built excellence for specific needs. Designed, tested, and manufactured by Volvo. Fully supported by the Volvo dealer network, coast-to-coast. Now that's More Care. Built In.

**Wheeled Excavators** – Volvo productivity on a highly versatile and mobile platform, adds value on or off-road in utility, construction, recycling, or any other job.

- EW160C, EW180C, EW210C.

**Demolition Solutions** – A full range of purpose-built excavators up to the task for extreme, primary and secondary demolition work.

- Standard Demolition: EC210C, EC240C, EC290C, EC360C, EC460C, EC700C

- Ultra High Reach Demolition: EC360CHR, EC700BHR.

**Forestry Solutions** – The new FC Series is purpose-built for harvesting, processing, loading, sorting, road building or site preparation.

- FC2421C, FC2924C, FC3329C.

**Waste Solutions** – Tailored solutions fulfill increasing production and environmental demands. Volvo delivers in the extreme conditions of landfills, transfer stations, and recycling centers.

- EC210C, EC240C, EC290C, EC330C, EC460C.

## Wheeled Excavators

	Engine	Engine HP (net)	Bucket Capacity	Lifting Capacity Along Undercarriage at Reach/Height
EW160C	Volvo D6E EJE2	142 hp (106 kW)	0.82~1.21 yd <sup>3</sup> (0.63~0.93 m <sup>3</sup> )	5.2 t 11,340 lb 6.0/1.5 m 20'/5' ft
EW180C	Volvo D6E EAE2	152 hp (113 kW)	0.88~1.34 yd <sup>3</sup> (0.68~1.03 m <sup>3</sup> )	7.8 t 16,630 lb 6.0/1.5 m 20'/5' ft
EW210C	Volvo D6E EEE3	161 hp (120 kW)	1.08~1.47 yd <sup>3</sup> (0.83~1.12 m <sup>3</sup> )	8.0 t 17,637 lb 6.0/1.5 m 20'/5' ft

	Reach (max.) at ground level	Digging Depth	Breakout Force ISO 6015	Operating Weight
EW160C	28' 11" (8824 mm)	18' 4" (5585 mm)	25,066 lbs (111.5 kN)	36,045~39,727 lbs (16.4~18.0 t)
EW180C	29' 9" (9080 mm)	19' 1" (5818 mm)	27,650 lbs (122.9 kN)	39,620~42,945 lbs (18.0~19.5 t)
EW210C	32' 1" (9770 mm)	20' 9" (6330 mm)	32,080 lbs (142.7 kN)	43,828~48,568 lbs (19.9~22.0 t)

## Ultra High Reach Demolition Excavators

	Operating Weight	3 Piece Boom		3 Piece Boom w/ Extension	
		Max Pin Height	Max Tool Weight	Max Pin Weight	Max Tool Weight
EC360CHR	110,230 lb (50.0 t)	69' (21 m)	6600 lb (3.0 t)	-	-
EC700BHR	187,391 lb (85.0 t)	95' (29 m)	7700 lb (3.5 t)	105' (32 m)	6600 lb (3.0 t)

## Forestry Excavators

	Engine	Engine HP (net)	Drawbar Pull	Swing Torque	Main Pump
FC2421C	Volvo D6E EAE3	147 hp (110 kW)	46,960 lbs 209 kN	56,497 ft lbs 76.6 kNm	2 x 53 gal/min 2 x 200 l/min
FC2924C	Volvo D7E EBE3	168 hp (125 kW)	51,818 lbs 230 kN	63,135 ft lbs 85.6 kNm	2 x 61 gal/min 2 x 230 l/min
FC3329C	Volvo D7E EAE3	192 hp (143 kW)	57,992 lbs 258 kN	76,927 ft lbs 104.3 kNm	2 x 66 gal/min 2 x 250 l/min

	Lifting Capacity Along Undercarriage at Reach/Height		Reach (max) overall	Max. depth from ground level	Operating Weight
FC2421C	6.34 t 6.0/1.5 m	13,750 lb 20'/5' ft	27' 9" 8460 mm	16' 8" 5070 mm	56,470~59,850 lbs 25,610~27,145 kg
FC2924C	9.53 t 6.0/1.5 m	20,650 lb 20'/5' ft	28' 7" 8720 mm	16' 10" 5130 mm	69,370~73,170 lbs 31,459~33,185 kg
FC3329C	8.91 t 6.0/1.5 m	19,370 lb 25'/5' ft	29' 10" 9090 mm	17' 11" 5450 mm	78,020~80,810 lbs 35,385~36,650 kg

See previous page for Waste and Standard Demolition specifications.

# VOLVO MOTOR GRADERS



## **The most advanced and productive motor grader in the industry today.**

The Volvo G900 Motor Graders are designed, built and tested to keep that same promise in every way.

From end-to-end, from the ground up, the G900 Motor Graders are fit and finished to take their place in your Volvo fleet. Design details and styling provide a familiar Volvo work environment inside and out.

Environmental performance is equally part of the G900 commitment to Volvo values. The G900 family meets EU Stage IIIA and US Tier 3 Emissions Regulations, as well as EU noise standards. Volvo engineering minimizes whole body vibration to maximize operator productivity in compliance with workplace requirements.

For grader operators everywhere, the G900 Motor Grader series is a new standard in grading performance and productivity. The Volvo standard.

	<b>Engine</b>	<b>Operating Weight</b>	<b>Net Engine Power</b>
<b>G930</b>	D7E / 7.2 L	34,830 lbs (15 800 kg)	155-195 hp (115-145 kW)
<b>G940</b>	D7E / 7.2 L	36,150 lbs (16 400 kg)	175-215 hp (130-160 kW)
<b>G946</b>	D7E / 7.2 L	38,140 lbs (17 300 kg)	195-235 hp (145-175 kW)
<b>G960</b>	D7E / 7.2 L	38,690 lbs (17 500 kg)	195-235 hp (145-175 kW)
<b>G970</b>	D9B / 9.4 L	41,660 lbs (18 900 kg)	210-250 hp (156-186 kW)
<b>G976</b>	D9B / 9.4 L	43,650 lbs (19 800 kg)	225-265 hp (168-198 kW)
<b>G990</b>	D9B / 9.4 L	48,720 lbs (22 100 kg)	225-265 hp (168-198 kW)

# VOLVO WHEEL LOADERS



## Master of all trades...setting production standards.

Combining only the finest research, design and manufacturing capabilities in today's industry and backed by over 50 years of experience, the Volvo Wheel Loader is specifically designed to lower your owning and operating costs.

Volvo's tier III-certified engines with reversible fan offer high torque at low rpm and are matched with load-sensing hydraulic pumps, pumps which supply oil only when required; this saves fuel and lowers costs. Volvo's lift-arm system, Torque-Parallel linkage, features high breakout force and parallel lift. Volvo's transmission features Fully Automatic Power Shift, allowing the loader to adapt to operator's habits and features automatic downshifting to first gear. Volvo's outboard-mounted wet-disc brakes increase cooling and extend brake life, lowering maintenance costs. The rear axle trunnion is maintenance-free. Volvo's spacious Care Cab defines productive comfort; production rates remain consistent over a day's shift due to excellent visibility, ergonomically-placed controls, viscous cab mounts and low interior sound levels. Volvo's operator feedback system, Contronic Monitoring System, ensures optimized performance all day.

Cost-efficiency is further improved through versatility; Volvo wheel loaders, one tool for multiple jobs. With the TP linkage, there's no need for multiple machines; Volvo's industry-acclaimed attachment bracket system allows you to change attachments in only a matter of seconds, so from material handling, simplified by excellent visibility, to maximizing each bucket load per pass, the Volvo wheel loader and its more than sixty available genuine Volvo attachments make you the master of your trade. And with all this technology, what do you get? The most cost-efficient wheel loader delivering unparalleled profitability – both now and in years to come.

	Engine	Max. Power at	Engine Horsepower net
L60F	Volvo D6ELCE3	1700 rpm	154 hp / (115 kW)
L70F	Volvo D6ELBE3	1700 rpm	168 hp / (125 kW)
L90F	Volvo D6ELAE3	1700 rpm	172 hp / (128 kW)
L110F	Volvo D7ELBE3	1700 rpm	230 hp / (169 kW)
L120F	Volvo D7ELAE3	1700 rpm	243 hp / (179 kW)
L150F	Volvo D12DLDE3	1400-1700 rpm	284 hp / (209 kW)
L180F	Volvo D12DLAE3	1400-1600 rpm	318 hp / (234 kW)
L220F	Volvo D12DLBE3	1600 rpm	352 hp / (259 kW)
L350F	Volvo D16ELAE3	1800 rpm	528 hp / (394 kW)

	Breakout Force	Static Tipping Load at Full Turn†	Bucket Range
L60F*	17,110 lbf / (76.1 kN)	15,520 lbs / (6920 kg)	2.2-6.5 yd <sup>3</sup> / (1.7-
L70F*	19,490 lbf / (86.7 kN)	17,360 lbs / (7870 kg)	2.6-8.4 yd <sup>3</sup> / (2.0-
L90F**	26,600 lbf / (118.3 kN)	21,100 lbs / (9570 kg)	3.0-9.2 yd <sup>3</sup> / (2.3-
L110F**	33,840 lbf / (150.5 kN)	24,600 lbs / (11 160 kg)	3.7-12.4 yd <sup>3</sup> / (2.8-
L120F**	34,500 lbf / (153.4 kN)	26,020 lbs / (11 800 kg)	4.4-12.4 yd <sup>3</sup> / (3.4-
L150F**	41,520 lbf / (184.7 kN)	33,700 lbs / (15 280 kg)	4.1-15.7 yd <sup>3</sup> / (3.1-
L180F**	48,280 lbf / (214.7 kN)	46,080 lbs / (20 900 kg)	4.8-18.3 yd <sup>3</sup> / (3.7-
L220F**	50,480 lbf / (224.5 kN)	45,750 lbs / (20 750 kg)	5.9-18.3 yd <sup>3</sup> / (4.5-
L350F**	113,460 lbf / (504.7 kN)	78,730 lbs / (35 710 kg)	8.1-16.6 yd <sup>3</sup> / (6.2-

\* Machine equipped with attachment bracket and general purpose hook-on buckets with bolt-on edges.

\*\* Machine equipped with general purpose pin-on direct mount buckets with bolt-on edges.

† Machine equipped with standard duty general purpose bucket with bolt-on edges.

Maximum Torque at	Maximum Torque net
1600 rpm	478 lbf ft / (648 Nm)
1400 rpm	530 lbf ft / (717 Nm)
1400 rpm	540 lbf ft / (732 Nm)
1500 rpm	781 lbf ft / (1059 Nm)
1500 rpm	781 lbf ft / (1059 Nm)
1400 rpm	1050 lbf ft / (1423 Nm)
1400 rpm	1176 lbf ft / (1594 Nm)
1400 rpm	1298 lbf ft / (1756 Nm)
1400 rpm	1870 lbf ft / (2530 Nm)

Capacity	Operating Weight
5.0 m <sup>3</sup>	24,250-27,120 lbs / (11.0-12.3 t)
6.4 m <sup>3</sup>	28,000-30,860 lbs / (12.7-14.0 t)
7.0 m <sup>3</sup>	33,070-37,480 lbs / (15.0-17.0 t)
9.5 m <sup>3</sup>	39,730-41,950 lbs / (18.0-19.0 t)
9.5 m <sup>3</sup>	42,190-43,880 lbs / (19.1-19.9 t)
12.0 m <sup>3</sup>	50,710-57,320 lbs / (23.0-26.0 t)
14.0 m <sup>3</sup>	57,320-63,930 lbs / (26.0-29.0 t)
14.0 m <sup>3</sup>	68,340-72,750 lbs / (31.0-33.0 t)
12.7 m <sup>3</sup>	110,250-119,050 lbs / (50.0-54.0 t)



# VOLVO SOIL COMPACTORS



## Increased versatility leads to increased profits.

Proper soil compaction poses many challenges. All you need is a versatile machine to get the job done right. That's why Volvo designs soil compactors with many innovative features that provide excellent drum performance, serviceability, reliability, and a safe, comfortable environment for the operator. Volvo smooth-drum and padfoot-drum models are engineered to efficiently and effectively compact all types of soils from granular to cohesive. Combine all this with our global dealer network offering superior parts and service, and unprecedented industry knowledge, and you'll see that Volvo is ready to face your day-to-day compaction challenges.

	<b>Operating Weight w/ROPS*</b>	<b>Drum Width</b>	<b>Vibration Frequency</b>	<b>Vibration Centrifugal Force</b>
<b>SD25D</b>	5,650 lb (2562 kg)	42" (1067 mm)	2,200 vpm (36,7 Hz)	14,020 lb (62 kN)
<b>SD25F</b>	5,920 lb (2685 kg)	42" (1067 mm)	2,200 vpm (36,7 Hz)	12,500 lb (55.6 kN)
<b>SD45D</b>	10,600 lb (4807 kg)	54" (1372 mm)	1,900 vpm (32 Hz)	22,500 lb (99 kN)
<b>SD45F</b>	11,350 lb (5147 kg)	54" (1372 mm)	1,900 vpm (32 Hz)	22,500 lb (99 kN)
<b>SD70D</b>	15,750 lb (7143 kg)	66" (1676 mm)	1,850 - 2,025 vmp (30,8 - 33,8 Hz)	23,300 - 32,100 lb (104 - 143 kN)
<b>SD70F</b>	17,780 lb (8063 kg)	66" (1676 mm)	1,850 - 2,025 vpm (30,8 - 33,8 Hz)	23,300 - 32,100 lb (104 - 143 kN)
<b>SD77DX</b>	16,350 lb (7415 kg)	66" (1676 mm)	1,850 - 2,025 vpm (30,8 - 33,8 Hz)	23,300 - 32,100 lb (104 - 143 kN)
<b>SD77F</b>	17,780 lb (8063 kg)	66" (1676 mm)	1,870 - 2,025 vpm (31,2 - 33,8 Hz)	30,300 - 38,500 lb (135 - 171 kN)
<b>SD100D</b>	23,100 lb (10 476 kg)	84" (2134 mm)	1,800 - 2,019 vpm (31,2 - 33,6 Hz)	46,300 - 59,300 lb (206 - 264 kN)
<b>SD100F</b>	25,100 lb (11 383 kg)	84" (2134 mm)	1,870 - 2,019 vpm (31,2 - 33,6 Hz)	46,300 - 59,300 lb (206 - 264 kN)
<b>SD105DX</b>	23,700 lb (10 748 kg)	84" (2134 mm)	1,225 - 2,025 vpm (20,4 - 33,8 Hz)	46,300 - 59,300 lb (206 - 264 kN)
<b>SD105F</b>	25,100 lb (11 383 kg)	84" (2134 mm)	1,225 - 2,025 vpm (20,4 - 33,8 Hz)	59,000 - 78,000 lb (267 - 347 kN)
<b>SD116DX</b>	23,930 lb (10 852 kg)	84" (2134 mm)	1,870 - 2,018 vpm (31 - 34 Hz)	47,900 - 61,000 lb (213 - 271 kN)
<b>SD116F</b>	25,050 lb (11 360 kg)	84" (2134 mm)	1,650 - 2,025 vpm (27,5 - 34 Hz)	59,400 - 61,000 lb (264 - 271 kN)
<b>SD160DX</b>	35,200 lb (15 964 kg)	84" (2134 mm)	1,850 - 2,025 vpm (30,8 - 33,8 Hz)	59,400 - 76,300 lb (264 - 339 kN)
<b>SD160F</b>	36,400 lb (16 508 kg)	84" (2134 mm)	1,650 - 2,025 vpm (27,5 - 33,8 Hz)	76,200 - 87,000 lb (339 - 387 kN)
<b>SD200DX</b>	45,000 lb (20 408 kg)	84" (2134 mm)	1,850 - 1,850 vpm (30,8 - 30,8 Hz)	53,700 - 82,800 lb (239 - 368 kN)
<b>SD200F</b>	44,500 lb (20 181 kg)	84" (2134 mm)	1,700 - 1,850 vpm (28,3 - 30,8 Hz)	72,600 - 80,800 lb (323 - 359 kN)

# VOLVO ASPHALT COMPACTORS



## Roll into the future with the most innovative compactors.

Asphalt compaction today presents you with a range of challenges, from newer mix designs to more stringent quality requirements to tighter timeframes. To compete successfully, you need a range of choices. Our line of Volvo large asphalt compactors offers more depth and breadth than ever, reflecting a tradition of continuous innovation in responding to customer needs. These compactors include advanced designs in operator comfort and visibility, and the industry's best water system. Combine all this with our global dealer network offering superior parts and service, and unprecedented industry knowledge, and you'll see that Volvo is ready for the long road ahead.

	<b>Operating Weight w/ROPS*</b>	<b>Drum Width</b>	<b>Vibration Frequency</b>	<b>Vibration Centrifugal Force</b>
<b>CR24</b>	5,742 lb (2604 kg)	47" (1200 mm)	4,000 vmp (66,7 Hz)	7100 lb (32 kN)
<b>CR30</b>	6,566 lb (2978 kg)	52" (1320 mm)	4,000 vmp (66,7 Hz)	7500 lb (33 kN)
<b>DD14S</b>	3,350 lb (1519 kg)	35.4" (900 mm)	4,000 vmp (66,7 Hz)	3500 lb (15.6 kN)
<b>DD16</b>	3,570 lb (1619 kg)	39.4" (1000 mm)	4,000 vmp (66,7 Hz)	4000 lb (17.8 kN)
<b>DD22</b>	5,400 lb (2450 kg)	39" (1000 mm)	3,300 - 4,000 vmp (55 - 67 Hz)	5620 - 8318 lb (25 - 37 kN)
<b>DD24</b>	5,725 lb (2600 kg)	47" (1200 mm)	3,300 - 4,000 vmp (55 - 67 Hz)	6295 - 8992 lb (28 - 40 kN)
<b>DD29</b>	6,335 lb (2873 kg)	49.2" (1250 mm)	4,000 vmp (66,7 Hz)	7100 lb (32 kN)
<b>DD31HF</b>	6,840 lb (3120 kg)	49.2" (1250 mm)	4,200 vmp (70 Hz)	8200 lb (36 kN)
<b>DD38HF</b>	8,400 lb (3809 kg)	54.1" (1375 mm)	4,200 vmp (70 Hz)	8200 lb (36 kN)
<b>DD70</b>	15,000 lb (6803 kg)	57" (1448 mm)	3,300 vmp (55 Hz)	8940 - 17,970 lb (40 - 80 kN)
<b>DD70HF</b>	14,895 lb (6755 kg)	57" (1448 mm)	4,000 vmp (66,7 Hz)	7820 - 21,080 lb (35 - 94 kN)
<b>DD90</b>	21,820 lb (9845 kg)	66" (1675 mm)	1,850 - 2,500 vmp (30,8 - 41,7 Hz)	5840 - 26,000 lb (26 - 115,6 kN)
<b>DD90HF</b>	21,705 lb (9845 kg)	66" (1675 mm)	2,850 - 3,800 vmp (47,5 - 63,3 Hz)	16,030 - 38,430 lb (71,3 - 171 kN)
<b>DD112HF</b>	27,670 lb (12 548 kg)	78.7" (2000 mm)	3,000 - 4,200 vmp (50 - 70 Hz)	33,090 - 42,070 lb (147,2 - 187,1 kN)
<b>DD118HF</b>	27,670 lb (12 548 kg)	78.7" (2000 mm)	3,400 vmp (56,67 Hz)	22,980 - 42,680 lb (102 - 190 kN)
<b>DD118HFA</b>	27,670 lb (12 548 kg)	78.7" (2000 mm)	3,000 - 4,200 vmp (50 - 70 Hz)	33,090 - 42,070 lb (147,2 - 187,1 kN)
<b>DD132HF</b>	30,325 lb (13 752 kg)	84" (2135 mm)	2,700 - 4,000 vmp (45 - 66,7 Hz)	36,680 - 41,720 lb (163,2 - 185,6 kN)
<b>DD138HF</b>	30,325 lb (13 752 kg)	84" (2135 mm)	3,200 vmp (53,3 Hz)	21,840 - 42,260 lb (97,1 - 188 kN)
<b>DD138HFA</b>	30,325 lb (13 752 kg)	84" (2135 mm)	2,700 - 4,000 vmp (45 - 66,7 Hz)	36,680 - 41,720 lb (163,2 - 185,6 kN)
<b>SD77DA</b>	17,350 lb (7868 kg)	66" (1675 mm)	1,850 - 2,500 vmp (31 - 42 Hz)	5840 - 26,000 lb (26 - 116 kN)
<b>PT125R</b>	9096 - 27,396 lb (4125 - 12 424 kg)	68" (1727 mm)	-	-

# VOLVO ASPHALT PAVERS



## **For performance, reliability, serviceability, and versatility, Volvo pavers have no equal.**

Road construction is unforgiving work. With only one chance to get it right, you need the machines that will keep you running as efficiently as possible.

That's why Volvo offers highway-class pavers that take the guesswork out of road construction. Equipped with a heritage of 75 years of Blaw-Knox and 60 years of ABG experience, these pavers have been proven time and time again, all over the world.

Volvo pavers have the production features you need to get the job done on time and on budget, along with the operating features that offer whole new levels of control, comfort, and convenience. Volvo offers rubber tire and track pavers that provide operator comfort and functionality in commercial and highway jobs with paving widths from 2,4 – 7,9 m (8 – 26 ft). Choose from seven models, and boost your versatility with several screed options.

Volvo pavers are built to work harder and last longer. That's why they have no equals in the industry.

## Blaw-Knox Pavers

	Max Paving Width	Engine Make / Model	Propulsion Tracked or Wheeled	Paving Speed ft/min (m/min)
PF4410	25.0' (7,62 m)	Cummins QSB 5.9-30T, 158 hp (117,8 kW)	Tracked	242' (73,8 m)
PF6110	26.0' (7,9 m)	Cummins QSB 6.7 Tier 3, 205 hp (153 kW)	Tracked	246.1' (75,0 m)
PF161	19.0' (5,8 m)	Cummins Elite 4BTA, 107 hp (80 kW)	Wheeled	196' (59,8 m)
PF2181	21.0' (6,4 m)	Cummins QSB 5.9-30T, 158 hp (118 kW)	Wheeled	260' (79,2 m)
PF3172	21.0' (6,4 m)	Cummins QSB 5.9-30T, 158 hp (117,8 kW)	Wheeled	227' (69,2 m)
PF6160	26.0' (7,9 m)	Cummins QSB 6.7 Tier 3, 205 hp (153 kW)	Wheeled	297' (90,5 m)
PF6170	26.0' (7,9 m)	Cummins QSB 6.7 Tier 3, 205 hp (153 kW)	Wheeled	297' (90,5 m)

## Blaw-Knox Screeds

	Screed Width	Standard Paving Width	Paving Depth Range	Screed Heat Type
Omni 1A	8.0' (2,44 m)	8.0 - 13.13' (2,44 - 4,0 m)	.25 - 8' (6,0 - 203 m)	Diesel
Omni 318	10.0' (3,05 m)	10.00 - 18.00' (3,05 - 5,49 m)	.25 - 12' (6,0 - 305 m)	Electric
Omni IIIA	10.0' (3,05 m)	10.00 - 18.00' (3,05 - 5,49 m)	.25 - 12' (6,0 - 305 m)	Diesel
Omni IIIE	10.0' (3,05 m)	10.00 - 18.00' (3,05 - 5,49 m)	.25 - 12' (6,0 - 305 m)	Electric
Omni1000	9.8' (3,0 m)	9.8 - 19.7' (3,0 - 6,0 m)	.25 - 12' (6,0 - 305 m)	Electric
Ultimat	9.8' (3,0 m)	110.0 - 20.0' (3,5 - 6,0 m)	.25 - 12' (6,0 - 305 m)	Electric
10' Wedge-Lock	10.0' (3,05 m)	10.0' (3,05 m)	.25 - 12' (6,0 - 305 m)	Diesel or Electric
10' Wedge-Lock w/ 3/6 Hyd. Extns.	10.0' (3,05 m)	10.0 - 16.0' (3,05 - 4,88 m)	.25 - 12' (6,0 - 305 m)	Diesel or Electric
8' Wedge-Lock	8.0' (2,44 m)	8.0' (2,44 m)	.25 - 8' (6,0 - 203 m)	Diesel
8' Wedge-Lock w/ 2.5/5 Hyd. Extns.	8.0' (2,44 m)	8.0 - 13.0' (2,44 - 3,96 m)	.25 - 8' (6,0 - 203 m)	Diesel or Electric

## Blaw-Knox Specialty Paving Equipment

	Weight	Working Width	Working Depth	Horsepower @ 2200 rpm
RW100A	24,520 lb (11 122 kg)	1.0 - 10.0" (0,3 - 3,05 mm)	9" (228 mm) above to 7" (177mm) below grade	110 hp (78 kW)
RW195D	33,000 lb (14 969 kg)	2.0 - 14.0" (0,60 - 4,26 mm)	11" (279 mm) above to 13" (330 mm) below grade	180 hp (134 kW)
	Weight	Storage Capacity	Horsepower	Swing Conveyor Discharge Reach
MC330	45,000 lb (20 411 kg)	30 t (26,7 T)	184 hp (137 kW)	12' (3,65m) @ 90 degrees

# VOLVO'S ENGINE LEADERSHIP SPANS LAND, SEA, SKY AND SPACE



As the world's largest manufacturer of 9-to-18-liter diesel engines, Volvo has unmatched expertise designing power systems that move the world. Volvo engines for Volvo Construction Equipment, Volvo Aero, Volvo Buses, Volvo Penta and Volvo Trucks define productivity and fuel economy.

Our performance has been honed on land, over the sea, across the sky and into space. Leading research and development keeps all Volvo Group products at the forefront of productivity. So when we say Volvo engines are tested — and proven — you can believe it. Trust in it. It's the real advantage of Volvo Power.



## **A strong, dedicated, capable dealer network.**

Our dealers are strategically located throughout North America to provide the equipment you need and the parts and service support you demand for a productive and profitable operation.

The strength of our dealer network is enhanced with extensive individualized product and product support training at our state-of-the-art Technical Training Center in Asheville and through hands-on training. At our nearby 75-acre Product Demonstration Center, visitors operate equipment from our entire product line under a variety of simulated working conditions. Both facilities are in use year-round by our dealers and customers – more than 2,000 visit each year.

## **A service and product support system designed to keep you working.**

As our product line evolves, so do the product support systems...systems designed to minimize downtime and costs...systems designed to provide essential information on our products.

Our dealer services are fully backed by highly trained regional product sales, marketing and service support personnel, with years of experience in the industry. In addition, all products are supported by trained dealer service personnel and a strong parts distribution network. Volvo dealers have immediate access to hundreds of thousands of parts through a worldwide computerized network...from the North America parts distribution center in Columbus, Ohio, and from other Volvo Construction Equipment parts facilities around the world. The dealer network also functions as a huge sourcing system for all customers, with each dealer having instant electronic access to the parts inventories of other distributors to fill every need.

Parts support is available 24 hours a day, 7 days a week, 365 days a year. Emergency orders are routinely shipped the same day to arrive the next morning (and sometimes to arrive the same day they are ordered).

## **[www.volvoce.com](http://www.volvoce.com)**

Come to the unique Volvo Construction Equipment Internet Website and change the way you do business. At the speed of point-and-click.

- Select the equipment that meets your needs.
- Do a virtual walkaround.
- Add your attachments and options.
- Build and price the equipment.
- Select your Volvo dealer and request a quote.
- Take delivery and go to work.



Volvo Construction Equipment is different. The company's products are designed, built and supported in a different way. That difference comes from our 175-year engineering heritage. A heritage of thinking first about the people who actually use the machines. About how to make them safer, more comfortable, more productive. About the environment we all share. The result of that thinking is a growing range of machines and a global support network dedicated to helping you do more. People around the world are proud to use Volvo. And we're proud of what makes Volvo different - **More care. Built in.**



*Not all products are available in all markets. Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine.*

# **VOLVO**

**Volvo Construction Equipment**  
[www.volvoce.com/na](http://www.volvoce.com/na)

Ref. No. 22 2 000 9017  
Printed in USA 06/08 - 10.0  
Volvo, Asheville  
Copyright © 2008 Volvo

English  
USA