

# SCATTRAK<sup>®</sup>

SKID STEER LOADERS

1750D

## SKID STEER LOADERS

### High Performance

- ▶ 1875 lb operating load capacity
- ▶ High breakout force and axle torque
- ▶ High efficiency Perkins 86 hp diesel engine
- ▶ Powerful 19 GPM hydraulic pump for fast cycle times, more power to run optional attachments
- ▶ Self-leveling bucket (lift only)

### Easy Access


- ▶ Forward tilting ROPS/FOPS cab allows quick and easy access to engine/hydrostatic and hydraulic components
- ▶ Swing out tailgate, hinged top engine cover, lift out floor panel, and drive chain access plates for excellent access to all key components

### Durable Design

- ▶ Welded unitized frame, modular axles, corrosion resistant pivot pins, rugged Quick-Attach system, sealed Teflon bushings and lubed-for-life universal joint

### Operator Comfort

- ▶ Extra wide operator compartment
- ▶ Convenient hand and foot controls standard (wrist action controls optional)
- ▶ Easy entrance and exit (no center cylinder to step over)
- ▶ Easy to read gauge/warning light panel

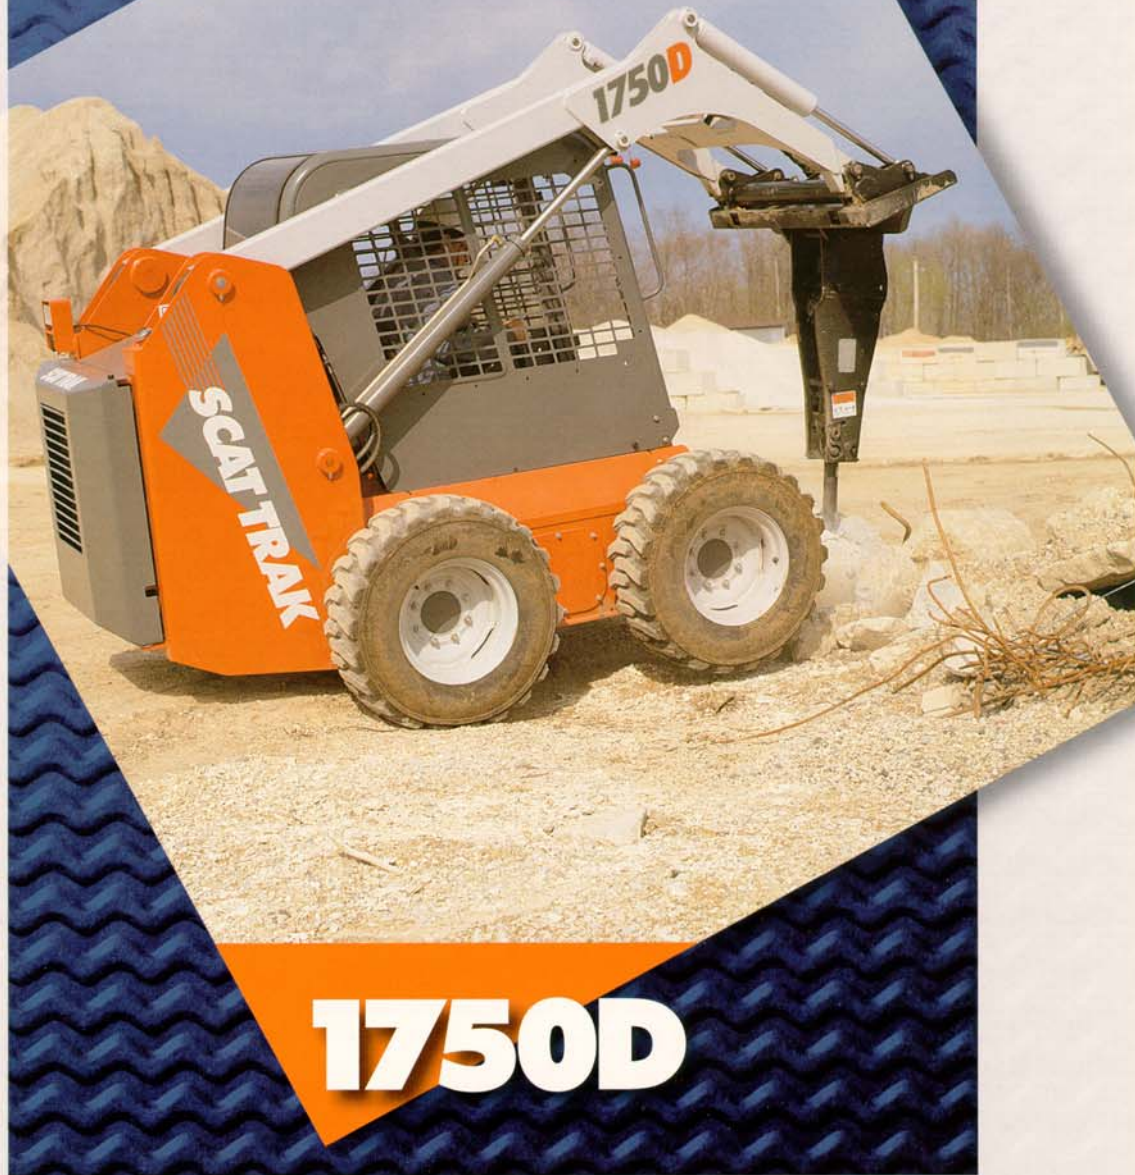

# 1750D



High horsepower and powerful hydraulic pump provide plenty of power for optional attachments.



Ideal for recycling, landscape, construction and industrial applications.




Designed to outperform and outlast the competition in rugged environments.

# SCATTRAK<sup>®</sup>

SKID STEER LOADERS

## 1750D

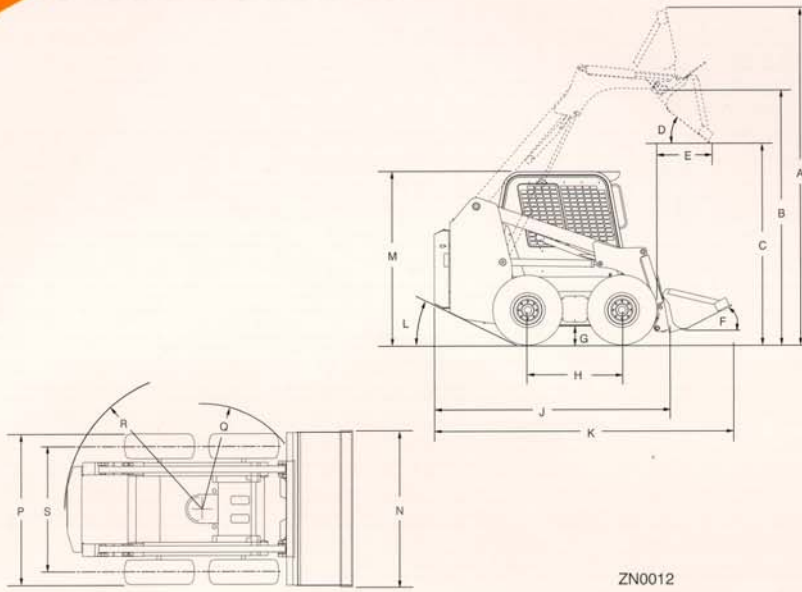

ZN0012

### Dimensions

A. Overall operating height (with dirt bucket 72" [1829 mm])	157.9" (4011 mm)
B. Height to hinge pin	121" (3073 mm)
C. Dump height	94" (2388 mm)
D. Dump angle	37°
E. Dump reach	24.2" (615 mm)
F. Maximum roll back	30°
G. Ground clearance	7.1" (180 mm)
H. Wheelbase	40.0" (1016 mm)
J. Overall length (less bucket)	109.0" (2769 mm)
K. Overall length (with dirt bucket)	137.8" (3500 mm)
L. Angle of departure	26°
M. Overall height	80.0" (2032 mm)
N. Bucket width	72.0" (1829 mm)
P. Clearance width (less bucket) — 8.25 x 15 tires (solid)	69.3" (1760 mm)
12.00 x 16.5 tires	71.8" (1824 mm)
Q. Front clearance circle (less bucket)	50.5" (1283 mm)
R. Rear clearance circle	64.0" (1626 mm)
S. Tread width	59.5" (1511 mm)

### Engine

Perkins 1004.42,  
4 cylinder liquid cooled diesel,  
86 hp (64 kW) @ 2400 rpm (U/min)  
Displacement . . . . . 258 cu in (4,2 liters)  
Fuel tank capacity . . . . . 21.6 gal (81,7 liters)

### Travel Speed

Travel range . . . . . 0-6 mph (0-9.7 km/h)

### Operating Specs

Operating capacity . . . . . 1875 lb (851 kg)  
Tipping load . . . . . 3750 lb (1703 kg)  
Hydraulic pump flow rate . . . . . 19 GPM (72 liters/min)  
Hydraulic reservoir capacity . . . . . 17.1 gal (64.7 liters)  
\*Approx. operating weight . . . . . 6980 lb (3166 kg)  
\*Full fuel tank, 165 lb (75 kg) operator, 72" (1829 mm) dirt bucket,  
12.00 x 16.5 — 6-ply tires.

### Standard Equipment

- ▶ Quick-Attach mounting frame
- ▶ Auxiliary hydraulics with flat face couplers
- ▶ Adjustable seat with 2" seat belt
- ▶ Operator restraint bar
- ▶ Dual travel/steering levers
- ▶ Tilt forward ROPS/FOPS cab
- ▶ Emergency exit rear window
- ▶ Mechanical park lock
- ▶ Loader arm service support
- ▶ Electronic loader arm lockout
- ▶ Hydraulic attachment self leveling
- ▶ Dual element air cleaner
- ▶ Thermal start kit
- ▶ Back-up alarm
- ▶ 12.00 x 16.5 — 6-ply flotation tires
- ▶ Lockable doors and covers
- ▶ Dual 12-Volt (525CCA) batteries
- ▶ Halogen work lights — two front/one rear
- ▶ 55 amp alternator
- ▶ Fuel gauge
- ▶ Hourmeter
- ▶ Warning light system
  - ▶ Engine water temperature, engine oil pressure and hydraulic oil temperature with audible alarm
  - ▶ Electrical charging system, transmission temperature, air filter restriction indicator, hydraulic filter bypass indicator and pre-heat indicator

### Options

- ▶ 33.00 x 15.5 x 16.5 — 12-ply super wide flotation tires
- ▶ 8.25 x 15 non-pneumatic segmented tires
- ▶ 12.00 x 16.5 non-pneumatic segmented tires
- ▶ 12.00 x 16.5 — 10-ply heavy duty flotation tires
- ▶ 8.00 x 16 non-pneumatic solid tires
- ▶ Over tire metal tracks
- ▶ 4-point lift hooks
- ▶ Spark arresting muffler
- ▶ Engine block heater
- ▶ Hydraulic reservoir heater
- ▶ Dual 12-Volt (800CCA) batteries
- ▶ Catalytic exhaust purifier
- ▶ Engine air intake pre-cleaner
- ▶ Top window
- ▶ Cab enclosure with heater, defroster and wiper
- ▶ Special applications front door
- ▶ Soft cab enclosure
- ▶ Deluxe seat
- ▶ Amber strobe light
- ▶ Horn
- ▶ 3" seat belt
- ▶ Wrist action hand controls
- ▶ Engine automatic shutdown system



901 Sunset Road  
Port Washington, Wisconsin 53074 USA  
(262) 268-3250 Fax: (262) 284-1153  
www.compact-technologies.com

WE RESERVE THE RIGHT TO AMEND THESE SPECIFICATIONS AT ANY TIME WITHOUT NOTICE. THE ONLY WARRANTY APPLICABLE IS THE STANDARD WARRANTY PERTAINING TO A PARTICULAR PRODUCT AND SALE. WE MAKE NO OTHER WARRANTY EXPRESSED OR IMPLIED.

The OmniQuip Family Includes:  
**SKYTRAK<sup>®</sup>, SNORKEL<sup>®</sup>, LULL<sup>®</sup>,  
and SCATTRAK<sup>®</sup>**