

The Allrounders for Farming



Zettelmeyer

The Agricultural Labourer for inside and out



A farmer is on call around the clock and his machines must keep pace. Zettelmeyer's ZL 302 F and ZL 402 F are reliable aids in and around the farm, in every season, inside and out. Manoeuvrable, versatile and reliable.






The small Allrounder ZL 302 F can be made even smaller...




...by simply folding down the folding ROPS bar.

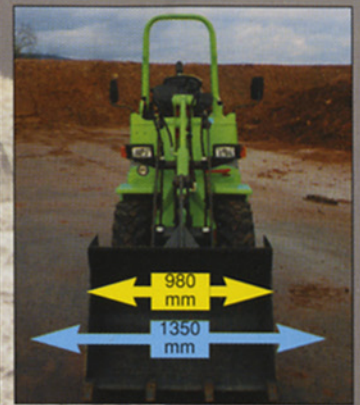

The width of the ZL302 F can be varied by inverting the wheels.

Narrow passages, low ceilings?

No problem for the ZL 302 F and ZL402 F! Their ROPS-bars make it possible to drive through low doorways. A suitable choice of tires lowers the height still further. Protection against sun or rain can be ordered in the form of a simple-to-mount protection canopy.

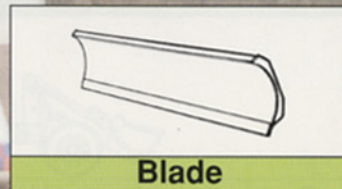

Blade



Manure Fork



Silage Cutter



Sweeper



Loading Fork



4-in-1 Bucket

The Zettermeyer-Allrounders pay their own way. Their great advantage is that they combine several machines in one: a large range of attachments is on offer to cover many aspects of farm and related work. You can change between attachments within seconds using the practical quick-change system - so keeping your Allrounder working wherever you need it.



High score for performance:



✓ **Powerful Hydrostatic Transmission**
for long service life

✓ **Good Manoeuvrability**
even in tight quarters due to articulating-oscillating joint

✓ **Strong Parallel Loader Linkage**
long reach and high payload

✓ **Safe and Stable**
even under full load due to good axle load distribution

✓ **Excellent off-road performance**
thanks to 100% differential lock front and rear

ZL 302 F



Engine Capacity, net kW/hp:	21/28
Bucket Capacity, m ³ (yd ³):	0,3 (0,4)
Operating Weight, kg (lb):	1800 (3970)
Standard Tires:	10.0/75 - 15.3
Speed, max., km/h (mph):	20,0 (12,4)
Engine:	4 cylinders - water-cooled
Transmission:	hydrostatic
Lifting Frame:	parallel-linkage
Lifting Capacity, max., kN (lbf):	17,5 (3930)
Breakout Force, kN (lbf):	19,5 (4380)
Tipping Load*, straight, kg (lb)(ISO):	1080 (2380)
Tipping Load*, full turn kg (lb) (ISO):	820 (1810)
Total Length, mm (ft in):	3940 (12' 11")
Length (w/o attachment),mm (ft in):	3340 (10' 11")
Full Height, mm (ft in):	2330 (7' 8")
Pin Height, mm (ft in)#	2450 (8' 4")
Bucket width, mm:	1350 (4' 5")
Ground Clearance, mm:	230 (0' 9")
Payload, Loading Fork, kg (lb):	600 (1320)

* with axle counterweights, rear 2x25 kg= 50 kg (110 lb)
long lift arm available, pin height 2700 mm (8' 10")

ZL 402 F



Engine Capacity, net kW/hp:	27/37
Bucket Capacity, m ³ (yd ³):	0,5 (0,7)
Operating Weight, kg (lb):	3250 (7160)
Standard Tires:	10.5-18
Speed, max., km/h (mph):	20,0 (12,4)
Engine:	3 cylinders - air/oil-cooled
Transmission:	hydrostatic
Lifting Frame:	parallel-linkage
Lifting Capacity, max., kN (lbf):	31,0 (6970)
Breakout Force, kN (lbf):	33,0 (7420)
Tipping Load, straight, kg (lb)(ISO):	2330 (5140)
Tipping Load, full turn kg (lb) (ISO):	1900 (4190)
Total Length, mm (ft in):	4490 (14' 9")
Length (w/o attachment),mm (ft in):	3780 (12' 5")
Full Height, mm (ft in):	2480 (8' 2")
Pin Height, mm (ft in)#	2980 (9' 9")
Bucket width, mm:	1650 (5' 5")
Ground Clearance, mm:	305 (1' 0")
Payload, Loading Fork, kg (lb):	1200 (2650)

long lift arm available, pin height 2700 mm (8' 10")

Zettelmeyer GmbH

Max-Planck-Straße 1 • D-54329 Konz-Könen
Postfach 13 40 • D-54323 Konz

Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine.

Ref. No. Zettelmeyer J. 29048060
Volvo Parts 21 1 430 5171
Printed in Germany 02.96 ENGLISCH