

VOLVO EXCAVATOR

EC460B LC



- **Engine power, gross:**
245 kW 329 hp
- **Operating weight:**
44.3 ~ 48.6 t
97,570 ~ 107,120 lb
- **Buckets (SAE):**
1,725 ~ 3,775 l
2.26 ~ 4.94 yd³
- Turbocharged Volvo diesel engine with direct injection and charged air cooler meets EPA Tier 3 emission standards

- Contronics, Volvo's advanced mode selection system and electronically-controlled system
- 2 variable displacement axial piston pumps. Independent and simultaneous movements of the digging equipment are controlled by "Automatic Sensing Work Mode"
- Cab
 - Ergonomic environment for easier operator use
 - Low sound level
 - Filtered air
- Hydraulic dampening mounts
- Fabric seat with heater and air suspension
- Strong digging equipment produced by robotic welding
- High lifting, breakout and tearout forces for tough digging conditions
- Long undercarriage for excellent stability
- Auxiliary hydraulic valve is standard
- Prepared for a number of optional items

VOLVO



ENGINE

The next-generation Volvo diesel engine uses Volvo Advanced Combustion Technology (V-ACT) to deliver lower emissions and maintain superior performance and fuel efficiency. The Tier 3 compliant engine uses precise, high-pressure fuel injectors, internal recirculation of engine exhaust and electronic engine controls to optimize machine performance.

Air Filter: 3-stage and precleaner

Automatic Idling System: Reduces engine speed to idle when the levers and pedals are not activated resulting in less fuel consumption and low cab noise levels.

Low-Emission Engine:

Make	VOLVO
Model	D12D EAE3
Power output at	30 r/s 1,800 rpm
Net (ISO 9249/ SAE J1349)	235 kW 316 hp
Gross (SAE J1995)	245 kW 329 hp
Max. torque at 1,350 rpm	1,720 N·m 1,269 lb·ft
No. of cylinders	6
Displacement	12.1 l 740 cu.in
Bore	131 mm 5.16"
Stroke	150 mm 5.91"



SWING SYSTEM

The swing system uses 2 axial piston motors, driving 2 planetary gearboxes for maximum torque. An automatic holding brake and anti-rebound valves are standard.

Max. swing speed 8.5 rpm



DRIVE

Each track is powered by an automatic two-speed shift travel motor. The track brakes are multi-disc, spring-applied and hydraulic released. The travel motor, brake and planetary gears are well protected within the track frame.

Max. drawbar pull (tractive effort)	324.6 kN
	72,990 lb
Max. travel speed	2.9/4.8 km/h
	1.8/3.0 mph
Gradeability	35° 70%



ELECTRICAL SYSTEM

High-capacity electrical system that is well protected. Waterproof double-lock harness plugs are used to secure corrosion-free connections. The main relays and solenoid valves are shielded to prevent damage. The master switch is standard.

Contronics provides advanced monitoring of machine functions and important diagnostic information.

Voltage	24 V
Batteries	2 x 12 V
Battery capacity	200 Ah
Alternator	28 V / 80 A



UNDERCARRIAGE

The undercarriage has a robust X-shaped frame. Greased and sealed track chains are standard.

Fixed undercarriage (Std.):

No. of track pads	2 x 52
Link pitch	215.9 mm 8.5"
Shoe width, triple grouser	600/700/800/900(Std.) mm 24"/28"/32"/36"(Std.)
Shoe width, double grouser	600 mm 24"
No. of bottom track rollers	2 x 9
No. of top rollers	2 x 2

Mechanically retractable undercarriage (Opt.):

No. of track pads	2 x 52
Link pitch	215.9 mm 8.5"
Shoe width, triple grouser	600/700/800/900(Std.) mm 24"/28"/32"/36"(Std.)
Shoe width, double grouser	600 mm 24"
No. of bottom track rollers	2 x 9
No. of top rollers	2 x 3



SERVICE REFILL CAPACITIES

Fuel tank	685 l	181 gal
Hydraulic system, total	525 l	139 gal
Hydraulic tank	270 l	71 gal
Engine oil	42 l	11 gal
Engine coolant	60 l	16 gal
Swing reduction unit	2 x 6.0 l	2 x 1.6 gal
Travel reduction unit	2 x 5.5 l	2 x 1.5 gal



HYDRAULIC SYSTEM

The hydraulic system, also known as the "Automatic Sensing Work Mode," is designed for high-productivity, high-digging capacity, high-maneuvering precision and good fuel economy. The summation system, boom, arm and swing priority along with boom and arm regeneration provides optimum performance.

The following important functions are included in the system:

Summation system: Combines the flow of both hydraulic pumps to ensure quick cycle times and high productivity.

Boom priority: Gives priority to the boom operation for faster raising when loading or performing deep excavations.

Arm priority: Gives priority to the arm operation for faster cycle times in leveling and for increased bucket filling when digging.

Swing priority: Gives priority to swing functions for faster simultaneous operations.

Regeneration system: Prevents cavitation and provides flow to other movements during simultaneous operations for maximum productivity.

Power boost: All digging and lifting forces are increased.

Holding valves: Boom and arm holding valves prevent the digging equipment from creeping.

Main pump:

Type	2 x variable displacement axial piston pumps
Maximum flow	2 x 345 l/min 2 x 91 gpm

Pilot pump:

Type	Gear pump
Maximum flow	1 x 31 l/min 8.2 gpm

Hydraulic motors:

Travel	Variable displacement axial piston motor with mechanical brake
Swing	Fixed displacement axial piston motor with mechanical brake

Relief valve setting:

Implement	31.4/34.3 Mpa 4,550/4,980 psi
Travel circuit	31.4 Mpa 4,550 psi
Swing circuit	24.5 Mpa 3,560 psi
Pilot circuit	3.9 Mpa 570 psi

Hydraulic cylinders:

Boom	2
Bore x Stroke	Ø165 x 1,590 mm Ø 6.5" x 62.6"
Arm	1
Bore x Stroke	Ø190 x 1,850 mm Ø 7.5" x 72.8"
Bucket	1
Bore x Stroke	Ø165 x 1,335 mm Ø 6.5" x 52.6"
ME bucket	1
Bore x Stroke	Ø175 x 1,335 mm Ø 6.9" x 52.6"



CAB

The operator's cab has easy access via a wide door opening. The cab is supported on hydraulic dampening mounts to reduce shock and vibration levels. These along with sound absorbing lining provide low noise levels. The cab has excellent all-round visibility. The front windshield can easily slide up into the ceiling, and the lower front glass can be removed and stored in the side door.

Integrated air-conditioning and heating system:

The pressurized and filtered cab air is supplied by an automatically-controlled fan. The air is distributed throughout the cab from 13 vents.

Ergonomic operator's seat: The adjustable seat and joystick console move independently to accommodate the operator. The seat has nine different adjustments plus a seat belt for the operator's comfort and safety.

Sound Level:

Sound level in cab according to ISO 6396	LpA 73 dB(A)
External sound level according to ISO 6395 and EU Directive 2000/14/EC	LwA 106 dB(A)



GROUND PRESSURE

• Machine with fixed undercarriage

Std. 7.0 m, 23' 0" boom, 3.35 m, 11' 0" arm, 1,730 kg, 3,810 lb bucket and 8,700 kg, 19,180 lb counterweight.

Description	Shoe width	Operating weight	Ground pressure	Overall width
Triple grouser	600 mm 24"	44,500 kg 98,120 lb	77.5 kPa 11.2 psi	3,340 mm 10' 11"
	700 mm 28"	45,000 kg 99,230 lb	66.7 kPa 9.7 psi	3,440 mm 11' 3"
	800 mm 32"	45,500 kg 100,330 lb	59.8 kPa 8.5 psi	3,540 mm 11' 7"
	900 mm 36"	46,020 kg 101,470 lb	53.9 kPa 7.7 psi	3,640 mm 11' 11"
Double grouser	600 mm 24"	44,250 kg 97,570 lb	77.5 kPa 11.1 psi	3,340 mm 10' 11"

• Machine with retractable undercarriage

Std. 7.0 m, 23' 0" boom, 3.35 m, 11' 0" arm, 1,730 kg, 3,810 lb bucket and 8,700 kg, 19,180 lb counterweight.

Description	Shoe width	Operating weight	Ground pressure	Overall width
Triple grouser	600 mm 24"	45,700 kg 100,770 lb	79.4 kPa 11.5 psi	3,490 mm 11' 5"
	700 mm 28"	46,220 kg 101,920 lb	68.6 kPa 10.0 psi	3,590 mm 11' 9"
	800 mm 32"	46,740 kg 103,060 lb	60.8 kPa 8.8 psi	3,690 mm 12' 1"
	900 mm 36"	47,280 kg 104,250 lb	54.9 kPa 8.0 psi	3,790 mm 12' 5"
Double grouser	600 mm 24"	45,450 kg 100,220 lb	79.4 kPa 11.4 psi	3,490 mm 11' 5"

• Machine with fixed undercarriage

Std. 7.0 m, 23' 0" boom, 3.35 m, 11' 0" arm, 1,730 kg, 3,810 lb bucket and 9,300 kg, 20,510 lb counterweight.

Description	Shoe width	Operating weight	Ground pressure	Overall width
Triple grouser	600 mm 24"	45,100 kg 99,450 lb	78.4 kPa 11.4 psi	3,340 mm 10' 11"
	700 mm 28"	45,600 kg 100,550 lb	67.7 kPa 9.8 psi	3,440 mm 11' 3"
	800 mm 32"	46,100 kg 101,650 lb	59.8 kPa 8.7 psi	3,540 mm 11' 7"
	900 mm 36"	46,620 kg 102,800 lb	53.9 kPa 7.8 psi	3,640 mm 11' 11"
Double grouser	600 mm 24"	44,850 kg 98,890 lb	78.4 kPa 11.4 psi	3,340 mm 10' 11"

• Machine with retractable undercarriage

Std. 7.0 m, 23' 0" boom, 3.35 m, 11' 0" arm, 1,730 kg, 3,810 lb bucket and 9,300 kg, 20,510 lb counterweight.

Description	Shoe width	Operating weight	Ground pressure	Overall width
Triple grouser	600 mm 24"	46,300 kg 102,090 lb	80.4 kPa 11.7 psi	3,490 mm 11' 5"
	700 mm 28"	46,820 kg 103,240 lb	69.6 kPa 10.1 psi	3,590 mm 11' 9"
	800 mm 32"	47,340 kg 104,380 lb	61.8 kPa 9.0 psi	3,690 mm 12' 1"
	900 mm 36"	47,880 kg 105,580 lb	55.9 kPa 8.1 psi	3,790 mm 12' 5"
Double grouser	600 mm 24"	46,050 kg 101,540 lb	80.4 kPa 11.7 psi	3,490 mm 11' 5"



GROUND PRESSURE

• Machine with fixed undercarriage

Std. 7.0 m, 23' 0" boom, 3.35 m, 11' 0" arm, 1,730 kg, 3,810 lb bucket and 10,000 kg, 22,050 lb counterweight.

Description	Shoe width	Operating weight	Ground pressure	Overall width
Triple grouser	600 mm 24"	45,800 kg 100,990 lb	79.2 kPa 11.5 psi	3,340 mm 10' 11"
	700 mm 28"	46,300 kg 102,090 lb	68.6 kPa 10.0 psi	3,440 mm 11' 3"
	800 mm 32"	46,800 kg 103,190 lb	60.7 kPa 8.8 psi	3,540 mm 11' 7"
	900 mm 36"	47,320 kg 104,340 lb	54.5 kPa 7.9 psi	3,640 mm 11' 11"
Double grouser	600 mm 24"	45,550 kg 100,440 lb	78.7 kPa 11.4 psi	3,340 mm 10' 11"

• Machine with retractable undercarriage

Std. 7.0 m, 23' 0" boom, 3.35 m, 11' 0" arm, 1,730 kg, 3,810 lb bucket and 10,000 kg, 22,050 lb counterweight.

Description	Shoe width	Operating weight	Ground pressure	Overall width
Triple grouser	600 mm 24"	47,000 kg 103,640 lb	81.2 kPa 11.8 psi	3,490 mm 11' 5"
	700 mm 28"	47,520 kg 104,780 lb	71.2 kPa 10.3 psi	3,590 mm 11' 9"
	800 mm 32"	48,040 kg 105,930 lb	63.0 kPa 9.1 psi	3,690 mm 12' 1"
	900 mm 36"	48,580 kg 107,120 lb	56.6 kPa 8.2 psi	3,790 mm 12' 5"
Double grouser	600 mm 24"	46,750 kg 103,080 lb	81.7 kPa 11.8 psi	3,490 mm 11' 5"

MAX. PERMITTED BUCKETS

*Note: 1. Bucket size based on ISO 7451, heaped material with a 1:1 angle of repose.
 2. "Max. permitted sizes" are for reference only and are not necessarily available from the factory.*

- Max. permitted sizes for pin-on buckets:

Fixed undercarriage, counterweight 8,700 kg, **19,180 lb**

Boom	Unit	ME 6.5 m, 21' 4"	Std. 7.0 m, 23' 0"			
Arm		2.55 m, 8' 4"	2.55 m, 8' 4"	Std. 3.35 m, 11' 0"	3.9 m, 12' 10"	4.8 m, 15' 9"
GP bucket 1.5 t/m ³ , 2,530 lb/yd ³	l, yd ³	3,575, 4.68	3,300, 4.32	3,000, 3.92	2,750, 3.60	2,425, 3.17
GP bucket 1.8 t/m ³ , 3,030 lb/yd ³	l, yd ³	3,125, 4.09	2,875, 3.76	2,625, 3.43	2,400, 3.14	2,125, 2.78
HD bucket 1.8 t/m ³ , 3,030 lb/yd ³	l, yd ³	2,900, 3.79	2,650, 3.47	2,425, 3.17	2,200, 2.88	1,950, 2.55
HD bucket 2.0 t/m ³ , 3,370 lb/yd ³	l, yd ³	2,675, 3.50	2,475, 3.24	2,250, 2.94	2,050, 2.68	1,825, 2.39

- Max. permitted sizes for hook-on buckets:

Fixed undercarriage, counterweight 8,700 kg, **19,180 lb**

Boom	Unit	ME 6.5 m, 21' 4"	Std. 7.0 m, 23' 0"			
Arm		2.55 m, 8' 4"	2.55 m, 8' 4"	Std. 3.35 m, 11' 0"	3.9 m, 12' 10"	4.8 m, 15' 9"
GP bucket 1.5 t/m ³ , 2,530 lb/yd ³	l, yd ³	3,450, 4.51	3,150, 4.12	2,850, 3.73	2,600, 3.40	2,300, 3.01
GP bucket 1.8 t/m ³ , 3,030 lb/yd ³	l, yd ³	3,025, 3.96	2,775, 3.63	2,500, 3.27	2,275, 2.98	2,000, 2.62
HD bucket 1.8 t/m ³ , 3,030 lb/yd ³	l, yd ³	2,775, 3.63	2,550, 3.34	2,300, 3.01	2,100, 2.75	1,850, 2.42
HD bucket 2.0 t/m ³ , 3,370 lb/yd ³	l, yd ³	2,575, 3.37	2,350, 3.07	2,150, 2.81	1,950, 2.55	1,725, 2.26

- Max. permitted sizes for pin-on buckets:

Mechanically retractable undercarriage, counterweight 8,700 kg, **19,180 lb**

Boom	Unit	ME 6.5 m, 21' 4"	Std. 7.0 m, 23' 0"			
Arm		2.55 m, 8' 4"	2.55 m, 8' 4"	Std. 3.35 m, 11' 0"	3.9 m, 12' 10"	4.8 m, 15' 9"
GP bucket 1.5 t/m ³ , 2,530 lb/yd ³	l, yd ³	3,625, 4.74	3,350, 4.38	3,050, 3.99	2,775, 3.63	2,475, 3.24
GP bucket 1.8 t/m ³ , 3,030 lb/yd ³	l, yd ³	3,175, 4.15	2,925, 3.83	2,650, 3.47	2,425, 3.17	2,150, 2.81
HD bucket 1.8 t/m ³ , 3,030 lb/yd ³	l, yd ³	2,925, 3.83	2,700, 3.53	2,450, 3.20	2,250, 2.94	2,000, 2.62
HD bucket 2.0 t/m ³ , 3,370 lb/yd ³	l, yd ³	2,725, 3.56	2,500, 3.27	2,275, 2.98	2,075, 2.71	1,850, 2.42

- Max. permitted sizes for hook-on buckets:

Mechanically retractable undercarriage, counterweight 8,700 kg, **19,180 lb**

Boom	Unit	ME 6.5 m, 21' 4"	Std. 7.0 m, 23' 0"			
Arm		2.55 m, 8' 4"	2.55 m, 8' 4"	Std. 3.35 m, 11' 0"	3.9 m, 12' 10"	4.8 m, 15' 9"
GP bucket 1.5 t/m ³ , 2,530 lb/yd ³	l, yd ³	3,500, 4.58	3,200, 4.19	2,900, 3.79	2,650, 3.47	2,325, 3.04
GP bucket 1.8 t/m ³ , 3,030 lb/yd ³	l, yd ³	3,050, 3.99	2,800, 3.66	2,550, 3.34	2,325, 3.04	2,050, 2.68
HD bucket 1.8 t/m ³ , 3,030 lb/yd ³	l, yd ³	2,825, 3.70	2,600, 3.40	2,350, 3.07	2,150, 2.81	1,875, 2.45
HD bucket 2.0 t/m ³ , 3,370 lb/yd ³	l, yd ³	2,625, 3.43	2,400, 3.14	2,175, 2.84	1,975, 2.58	1,750, 2.29

MAX. PERMITTED BUCKETS

*Note: 1. Bucket size based on ISO 7451, heaped material with a 1:1 angle of repose.
 2. "Max. permitted sizes" are for reference only and are not necessarily available from the factory.*

- Max. permitted **sizes for pin-on buckets:**

Fixed undercarriage, counterweight 9,300 kg, **20,510 lb**/10,000 kg, **22,050 lb**

Boom	Unit	ME 6.5 m, 21' 4"	Std. 7.0 m, 23' 0"			
Arm		2.55 m, 8' 4"	2.55 m, 8' 4"	Std. 3.35 m, 11' 0"	3.9 m, 12' 10"	4.8 m, 15' 9"
GP bucket 1.5 t/m ³ , 2,530 lb/yd³	l, yd ³	3,725, 4.87	3,425, 4.48	3,125, 4.09	2,850, 3.73	2,525, 3.30
GP bucket 1.8 t/m ³ , 3,030 lb/yd³	l, yd ³	3,275, 4.28	3,000, 3.92	2,725, 3.56	2,500, 3.27	2,225, 2.91
HD bucket 1.8 t/m ³ , 3,030 lb/yd³	l, yd ³	3,000, 3.92	2,775, 3.63	2,525, 3.30	2,300, 3.01	2,050, 2.68
HD bucket 2.0 t/m ³ , 3,370 lb/yd³	l, yd ³	2,800, 3.66	2,575, 3.37	2,325, 3.04	2,150, 2.81	1,900, 2.49

- Max. permitted **sizes for hook-on buckets:**

Fixed undercarriage, counterweight 9,300 kg, **20,510 lb**/10,000 kg, **22,050 lb**

Boom	Unit	ME 6.5 m, 21' 4"	Std. 7.0 m, 23' 0"			
Arm		2.55 m, 8' 4"	2.55 m, 8' 4"	Std. 3.35 m, 11' 0"	3.9 m, 12' 10"	4.8 m, 15' 9"
GP bucket 1.5 t/m ³ , 2,530 lb/yd³	l, yd ³	3,600, 4.71	3,300, 4.32	2,975, 3.89	2,725, 3.56	2,400, 3.14
GP bucket 1.8 t/m ³ , 3,030 lb/yd³	l, yd ³	3,150, 4.12	2,875, 3.76	2,600, 3.40	2,375, 3.11	2,100, 2.75
HD bucket 1.8 t/m ³ , 3,030 lb/yd³	l, yd ³	2,900, 3.79	2,650, 3.47	2,400, 3.14	2,200, 2.88	1,950, 2.55
HD bucket 2.0 t/m ³ , 3,370 lb/yd³	l, yd ³	2,700, 3.53	2,475, 3.24	2,225, 2.91	2,050, 2.68	1,800, 2.35

- Max. permitted **sizes for pin-on buckets:**

Mechanically retractable undercarriage, counterweight 9,300 kg, **20,510 lb**/10,000 kg, **22,050 lb**


Boom	Unit	ME 6.5 m, 21' 4"	Std. 7.0 m, 23' 0"			
Arm		2.55 m, 8' 4"	2.55 m, 8' 4"	Std. 3.35 m, 11' 0"	3.9 m, 12' 10"	4.8 m, 15' 9"
GP bucket 1.5 t/m ³ , 2,530 lb/yd³	l, yd ³	3,775, 4.94	3,475, 4.55	3,175, 4.15	2,900, 3.79	2,575, 3.37
GP bucket 1.8 t/m ³ , 3,030 lb/yd³	l, yd ³	3,300, 4.32	3,050, 3.99	2,775, 3.63	2,550, 3.34	2,250, 2.94
HD bucket 1.8 t/m ³ , 3,030 lb/yd³	l, yd ³	3,050, 3.99	2,800, 3.66	2,550, 3.34	2,350, 3.07	2,075, 2.71
HD bucket 2.0 t/m ³ , 3,370 lb/yd³	l, yd ³	2,825, 3.70	2,600, 3.40	2,375, 3.11	2,175, 2.84	1,925, 2.52

- Max. permitted **sizes for hook-on buckets:**

Mechanically retractable undercarriage, counterweight 9,300 kg, **20,510 lb**/10,000 kg, **22,050 lb**

Boom	Unit	ME 6.5 m, 21' 4"	Std. 7.0 m, 23' 0"			
Arm		2.55 m, 8' 4"	2.55 m, 8' 4"	Std. 3.35 m, 11' 0"	3.9 m, 12' 10"	4.8 m, 15' 9"
GP bucket 1.5 t/m ³ , 2,530 lb/yd³	l, yd ³	3,650, 4.77	3,350, 4.38	3,025, 3.96	2,775, 3.63	2,450, 3.20
GP bucket 1.8 t/m ³ , 3,030 lb/yd³	l, yd ³	3,200, 4.19	2,925, 3.83	2,650, 3.47	2,425, 3.17	2,150, 2.81
HD bucket 1.8 t/m ³ , 3,030 lb/yd³	l, yd ³	2,950, 3.86	2,700, 3.53	2,450, 3.20	2,250, 2.94	1,975, 2.58
HD bucket 2.0 t/m ³ , 3,370 lb/yd³	l, yd ³	2,725, 3.56	2,500, 3.27	2,275, 2.98	2,075, 2.71	1,825, 2.39

DIMENSIONS

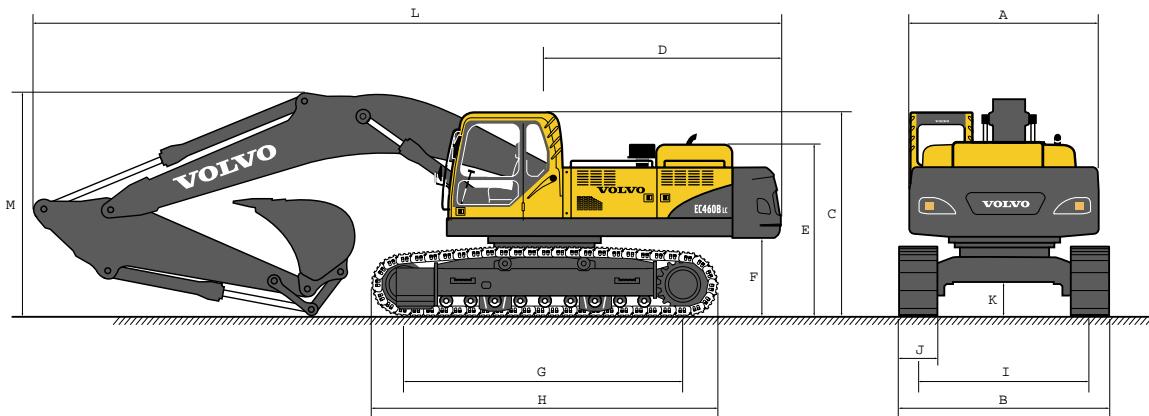

• Std. fixed undercarriage

Boom	Unit	ME 6.5 m, 21' 4"					Std. 7.0 m, 23' 0"				
		2.55 m, 8' 4"	2.55 m, 8' 4"	Std. 3.35 m, 11' 0"	3.9 m, 12' 10"	4.8 m, 15' 9"	2.55 m, 8' 4"	2.55 m, 8' 4"	Std. 3.35 m, 11' 0"	3.9 m, 12' 10"	4.8 m, 15' 9"
A. Overall width of superstructure	mm, ft-in	2,990, 9' 10"	2,990, 9' 10"	2,990, 9' 10"	2,990, 9' 10"	2,990, 9' 10"	2,990, 9' 10"	2,990, 9' 10"	2,990, 9' 10"	2,990, 9' 10"	2,990, 9' 10"
B. Overall width	mm, ft-in	3,640, 11' 11"	3,640, 11' 11"	3,640, 11' 11"	3,640, 11' 11"	3,640, 11' 11"	3,640, 11' 11"	3,640, 11' 11"	3,640, 11' 11"	3,640, 11' 11"	3,640, 11' 11"
C. Overall height of cab	mm, ft-in	3,250, 10' 8"	3,250, 10' 8"	3,250, 10' 8"	3,250, 10' 8"	3,250, 10' 8"	3,250, 10' 8"	3,250, 10' 8"	3,250, 10' 8"	3,250, 10' 8"	3,250, 10' 8"
D. Tail swing radius	mm, ft-in	3,730, 12' 3"	3,730, 12' 3"	3,730, 12' 3"	3,730, 12' 3"	3,730, 12' 3"	3,730, 12' 3"	3,730, 12' 3"	3,730, 12' 3"	3,730, 12' 3"	3,730, 12' 3"
E. Overall height of engine hood	mm, ft-in	2,750, 9' 0"	2,750, 9' 0"	2,750, 9' 0"	2,750, 9' 0"	2,750, 9' 0"	2,750, 9' 0"	2,750, 9' 0"	2,750, 9' 0"	2,750, 9' 0"	2,750, 9' 0"
F. Counterweight clearance *	mm, ft-in	1,275, 4' 2"	1,275, 4' 2"	1,275, 4' 2"	1,275, 4' 2"	1,275, 4' 2"	1,275, 4' 2"	1,275, 4' 2"	1,275, 4' 2"	1,275, 4' 2"	1,275, 4' 2"
G. Tumbler length	mm, ft-in	4,370, 14' 4"	4,370, 14' 4"	4,370, 14' 4"	4,370, 14' 4"	4,370, 14' 4"	4,370, 14' 4"	4,370, 14' 4"	4,370, 14' 4"	4,370, 14' 4"	4,370, 14' 4"
H. Track length	mm, ft-in	5,370, 17' 7"	5,370, 17' 7"	5,370, 17' 7"	5,370, 17' 7"	5,370, 17' 7"	5,370, 17' 7"	5,370, 17' 7"	5,370, 17' 7"	5,370, 17' 7"	5,370, 17' 7"
I. Track gauge	mm, ft-in	2,740, 9' 0"	2,740, 9' 0"	2,740, 9' 0"	2,740, 9' 0"	2,740, 9' 0"	2,740, 9' 0"	2,740, 9' 0"	2,740, 9' 0"	2,740, 9' 0"	2,740, 9' 0"
J. Shoe width	mm, in	900, 36"	900, 36"	900, 36"	900, 36"	900, 36"	900, 36"	900, 36"	900, 36"	900, 36"	900, 36"
K. Min. ground clearance *	mm, ft-in	550, 1' 10"	550, 1' 10"	550, 1' 10"	550, 1' 10"	550, 1' 10"	550, 1' 10"	550, 1' 10"	550, 1' 10"	550, 1' 10"	550, 1' 10"
L. Overall length	mm, ft-in	11,560, 37' 11"	12,060, 39' 7"	12,070, 39' 7"	12,070, 39' 7"	12,070, 39' 7"	12,070, 39' 7"	12,070, 39' 7"	11,940, 39' 2"	11,940, 39' 2"	11,940, 39' 2"
M. Overall height of boom	mm, ft-in	3,770, 12' 4"	3,630, 11' 11"	3,650, 12' 0"	3,690, 12' 1"	4,650, 15' 3"	3,650, 12' 0"	3,690, 12' 1"	4,650, 15' 3"	4,650, 15' 3"	4,650, 15' 3"


• Mechanically retractable undercarriage

Boom	Unit	ME 6.5 m, 21' 4"					Std. 7.0 m, 23' 0"				
		2.55 m, 8' 4"	2.55 m, 8' 4"	Std. 3.35 m, 11' 0"	3.9 m, 12' 10"	4.8 m, 15' 9"	2.55 m, 8' 4"	2.55 m, 8' 4"	Std. 3.35 m, 11' 0"	3.9 m, 12' 10"	4.8 m, 15' 9"
A. Overall width of superstructure	mm, ft-in	2,990, 9' 10"	2,990, 9' 10"	2,990, 9' 10"	2,990, 9' 10"	2,990, 9' 10"	2,990, 9' 10"	2,990, 9' 10"	2,990, 9' 10"	2,990, 9' 10"	2,990, 9' 10"
B. Overall width (extended)	mm, ft-in	3,790, 12' 5"	3,790, 12' 5"	3,790, 12' 5"	3,790, 12' 5"	3,790, 12' 5"	3,790, 12' 5"	3,790, 12' 5"	3,790, 12' 5"	3,790, 12' 5"	3,790, 12' 5"
Overall width (retracted)	mm, ft-in	3,290, 10' 10"	3,290, 10' 10"	3,290, 10' 10"	3,290, 10' 10"	3,290, 10' 10"	3,290, 10' 10"	3,290, 10' 10"	3,290, 10' 10"	3,290, 10' 10"	3,290, 10' 10"
C. Overall height of cab	mm, ft-in	3,360, 11' 0"	3,360, 11' 0"	3,360, 11' 0"	3,360, 11' 0"	3,360, 11' 0"	3,360, 11' 0"	3,360, 11' 0"	3,360, 11' 0"	3,360, 11' 0"	3,360, 11' 0"
D. Tail swing radius	mm, ft-in	3,730, 12' 3"	3,730, 12' 3"	3,730, 12' 3"	3,730, 12' 3"	3,730, 12' 3"	3,730, 12' 3"	3,730, 12' 3"	3,730, 12' 3"	3,730, 12' 3"	3,730, 12' 3"
E. Overall height of engine hood	mm, ft-in	2,860, 9' 5"	2,860, 9' 5"	2,860, 9' 5"	2,860, 9' 5"	2,860, 9' 5"	2,860, 9' 5"	2,860, 9' 5"	2,860, 9' 5"	2,860, 9' 5"	2,860, 9' 5"
F. Counterweight clearance *	mm, ft-in	1,385, 4' 7"	1,385, 4' 7"	1,385, 4' 7"	1,385, 4' 7"	1,385, 4' 7"	1,385, 4' 7"	1,385, 4' 7"	1,385, 4' 7"	1,385, 4' 7"	1,385, 4' 7"
G. Tumbler length	mm, ft-in	4,370, 14' 4"	4,370, 14' 4"	4,370, 14' 4"	4,370, 14' 4"	4,370, 14' 4"	4,370, 14' 4"	4,370, 14' 4"	4,370, 14' 4"	4,370, 14' 4"	4,370, 14' 4"
H. Track length	mm, ft-in	5,370, 17' 7"	5,370, 17' 7"	5,370, 17' 7"	5,370, 17' 7"	5,370, 17' 7"	5,370, 17' 7"	5,370, 17' 7"	5,370, 17' 7"	5,370, 17' 7"	5,370, 17' 7"
I. Track gauge (extended)	mm, ft-in	2,890, 9' 6"	2,890, 9' 6"	2,890, 9' 6"	2,890, 9' 6"	2,890, 9' 6"	2,890, 9' 6"	2,890, 9' 6"	2,890, 9' 6"	2,890, 9' 6"	2,890, 9' 6"
Track gauge (retracted)	mm, ft-in	2,390, 7' 10"	2,390, 7' 10"	2,390, 7' 10"	2,390, 7' 10"	2,390, 7' 10"	2,390, 7' 10"	2,390, 7' 10"	2,390, 7' 10"	2,390, 7' 10"	2,390, 7' 10"
J. Shoe width	mm, in	900, 36"	900, 36"	900, 36"	900, 36"	900, 36"	900, 36"	900, 36"	900, 36"	900, 36"	900, 36"
K. Min. ground clearance *	mm, ft-in	746, 2' 5"	746, 2' 5"	746, 2' 5"	746, 2' 5"	746, 2' 5"	746, 2' 5"	746, 2' 5"	746, 2' 5"	746, 2' 5"	746, 2' 5"
L. Overall length	mm, ft-in	11,540, 37' 10"	12,060, 39' 7"	12,070, 39' 7"	12,070, 39' 7"	12,070, 39' 7"	12,070, 39' 7"	12,070, 39' 7"	11,940, 39' 2"	11,940, 39' 2"	11,940, 39' 2"
M. Overall height of boom	mm, ft-in	3,800, 12' 6"	3,770, 12' 4"	3,790, 12' 5"	3,830, 12' 7"	4,790, 15' 9"	3,830, 12' 7"	4,790, 15' 9"	3,830, 12' 7"	4,790, 15' 9"	4,790, 15' 9"

* Without shoe grouser

DIMENSIONS


• Boom

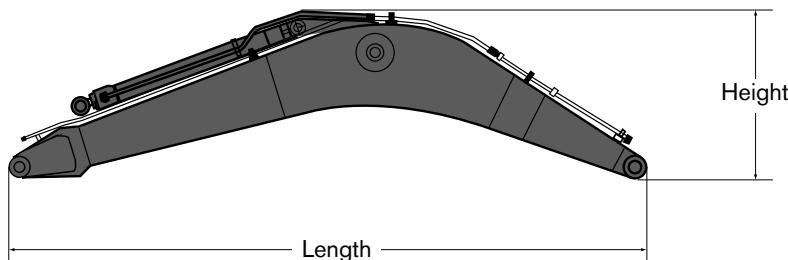

Description	ME 6.5 m, 21' 4"	Std. 7.0 m, 23' 0"
Length	6,750 mm, 22' 2"	7,250 mm, 23' 9"
Height	2,000 mm, 6' 7"	1,840 mm, 6' 0"
Width	960 mm, 3' 2"	960 mm, 3' 2"
Weight	3,950 kg, 8,710 lb	4,000 kg, 8,820 lb

* Includes cylinder, pin and piping


• Arm

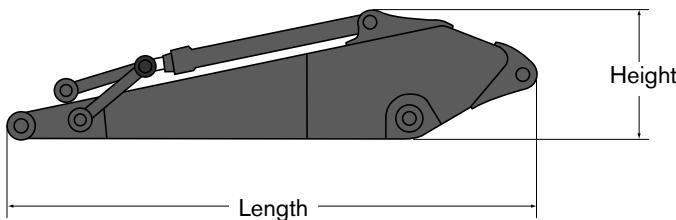

Description	2.55 m, 8' 4"	3.35 m, 11' 0"		3.9 m, 12' 10"	4.8 m, 15' 9"
		Standard	Heavy-duty		
Length	3,770 mm, 12' 4"	4,590 mm, 15' 1"	4,590 mm, 15' 1"	5,140 mm, 16' 10"	6,100 mm, 20' 0"
Height	1,235 mm, 4' 1"	1,230 mm, 4' 0"	1,235 mm, 4' 1"	1,240 mm, 4' 1"	1,250 mm, 4' 1"
Width	600 mm, 2' 0"				
Weight	2,350 kg, 5,180 lb	2,500 kg, 5,510 lb	2,500 kg, 5,510 lb	2,500 kg, 5,510 lb	2,700 kg, 5,950 lb

* Includes cylinder, piping and linkage

WORKING RANGES & DIGGING FORCES

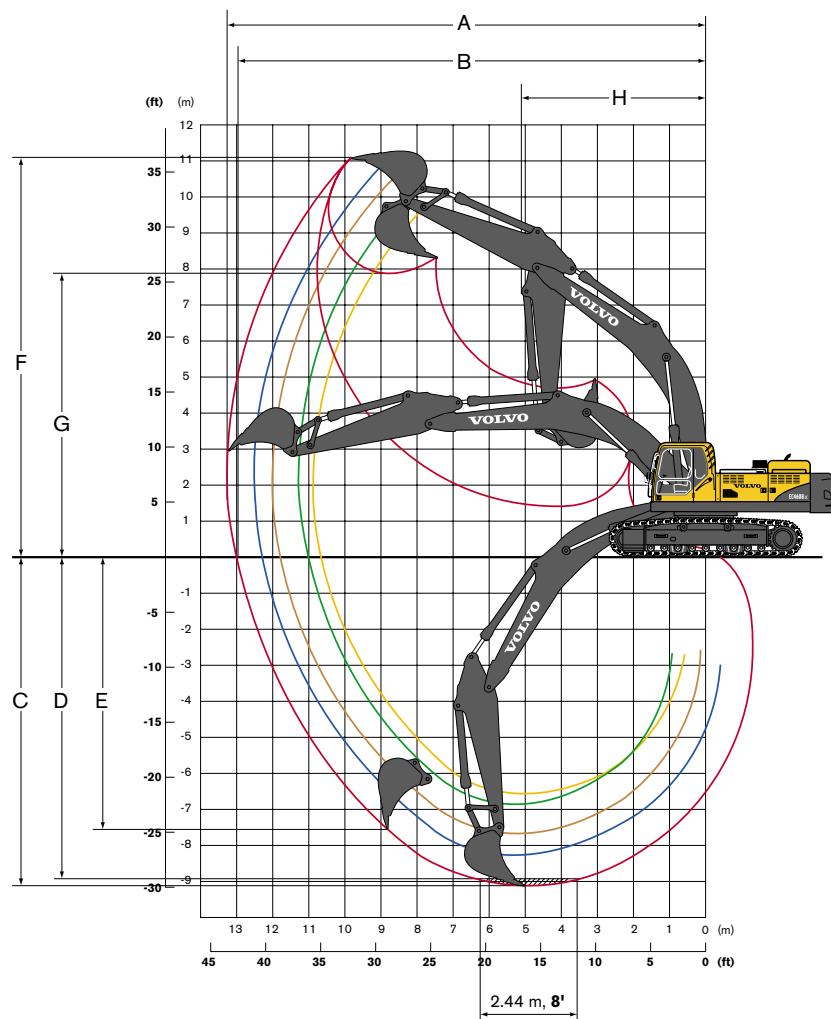


- Machine with std. fixed undercarriage, pin-on bucket

Boom	Unit	ME 6.5 m, 21' 4"		Std. 7.0 m, 23' 0"		
Arm		2.55 m, 8' 4"	2.55 m, 8' 4"	Std. 3.35 m, 11' 0"	3.9 m, 12' 10"	4.8 m, 15' 9"
A. Max. digging reach	mm, ft-in	10,900, 35' 9"	11,310, 37' 1"	12,000, 39' 4"	12,500, 41' 0"	13,220, 43' 4"
B. Max. digging reach on ground	mm, ft-in	10,660, 35' 0"	11,070, 36' 4"	11,780, 38' 8"	12,290, 40' 4"	13,020, 42' 9"
C. Max. digging depth	mm, ft-in	6,570, 21' 7"	6,900, 22' 8"	7,700, 25' 3"	8,250, 27' 1"	9,150, 30' 0"
D. Max. digging depth (8' level)	mm, ft-in	6,400, 21' 0"	6,720, 22' 1"	7,550, 24' 9"	8,120, 26' 8"	9,030, 29' 8"
E. Max. vertical wall digging depth	mm, ft-in	5,800, 19' 0"	6,150, 20' 2"	6,840, 22' 5"	7,300, 23' 11"	7,730, 25' 4"
F. Max. cutting height	mm, ft-in	10,580, 34' 9"	10,820, 35' 6"	10,970, 36' 0"	11,150, 36' 7"	11,090, 36' 5"
G. Max. dumping height	mm, ft-in	6,980, 22' 11"	7,440, 24' 5"	7,650, 25' 1"	7,840, 25' 9"	7,870, 25' 10"
H. Min. front swing radius	mm, ft-in	4,770, 15' 8"	5,170, 17' 0"	5,090, 16' 8"	4,990, 16' 4"	5,040, 16' 6"

- Digging forces with pin-on bucket

Boom	Unit	ME 6.5 m, 21' 4"		Std. 7.0 m, 23' 0"		
Arm		2.55 m, 8' 4"	2.55 m, 8' 4"	Std. 3.35 m, 11' 0"	3.9 m, 12' 10"	4.8 m, 15' 9"
Bucket tip radius	mm, in	1,923, 76"	1,810, 71"	1,810, 71"	1,810, 71"	1,810, 71"
Breakout force – bucket (Normal/Power boost)	SAE	kN lb	245.2/267.7 55,130/60,200	222.6/244.2 50,050/54,900	222.6/244.2 50,050/54,900	222.6/244.2 50,050/54,900
Tearout force – arm (Normal/Power boost)	SAE	kN lb	217.7/237.3 48,950/53,360	224.6/245.2 50,490/55,130	190.2/208.9 42,780/46,970	170.6/186.3 38,370/41,900
Rotation angle, bucket	deg	169°	183°	183°	183°	183°

WORKING RANGES & DIGGING FORCES

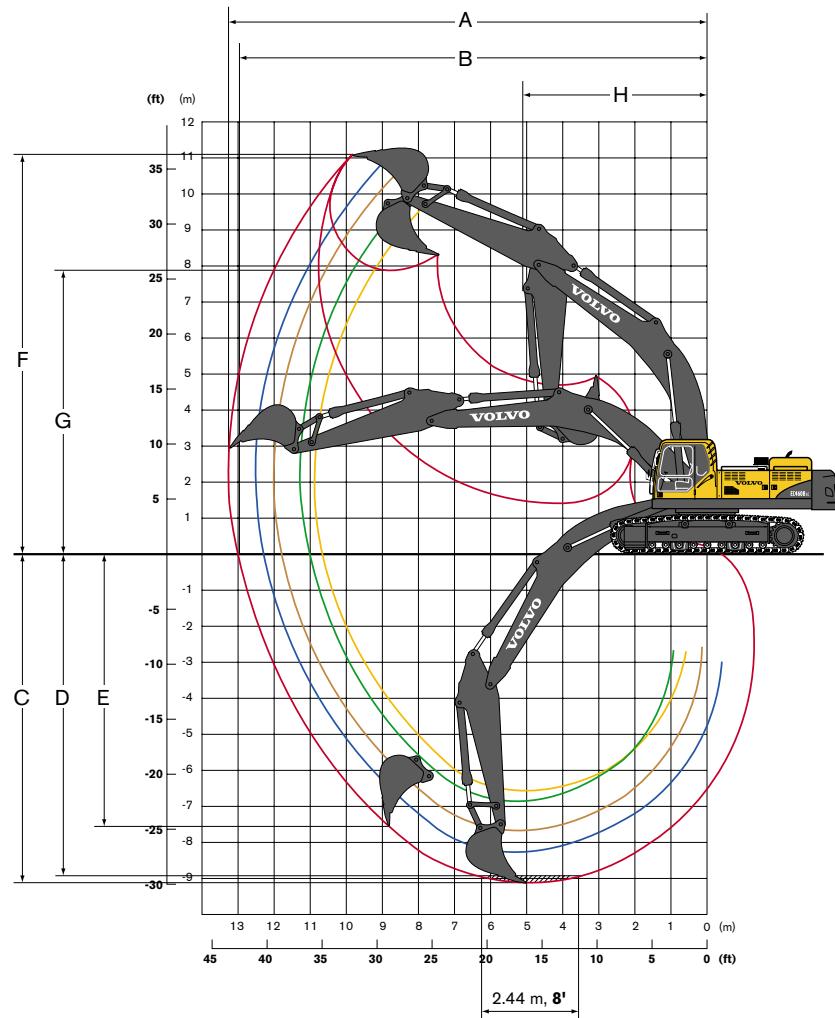

- Machine with mechanically retractable undercarriage, pin-on bucket

Boom	Unit	ME 6.5 m, 21' 4"		Std. 7.0 m, 23' 0"		
Arm		2.55 m, 8' 4"	2.55 m, 8' 4"	Std. 3.35 m, 11' 0"	3.9 m, 12' 10"	4.8 m, 15' 9"
A. Max. digging reach	mm, ft-in	10,900, 35' 9"	11,310, 37' 1"	12,000, 39' 4"	12,500, 41' 0"	13,220, 43' 4"
B. Max. digging reach on ground	mm, ft-in	10,630, 34' 11"	11,050, 36' 3"	11,750, 38' 7"	12,260, 40' 3"	12,990, 42' 7"
C. Max. digging depth	mm, ft-in	6,440, 21' 2"	6,770, 22' 3"	7,570, 24' 10"	8,120, 26' 8"	9,020, 29' 7"
D. Max. digging depth (8' level)	mm, ft-in	6,270, 20' 7"	6,590, 21' 7"	7,420, 24' 4"	7,980, 26' 2"	8,900, 29' 2"
E. Max. vertical wall digging depth	mm, ft-in	5,670, 18' 7"	6,020, 19' 9"	6,710, 22' 0"	7,170, 23' 6"	7,600, 24' 11"
F. Max. cutting height	mm, ft-in	10,710, 35' 2"	10,950, 35' 11"	11,110, 36' 5"	11,280, 37' 0"	11,220, 36' 10"
G. Max. dumping height	mm, ft-in	7,110, 23' 4"	7,570, 24' 10"	7,780, 25' 6"	7,970, 26' 2"	8,000, 26' 3"
H. Min. front swing radius	mm, ft-in	4,770, 15' 8"	5,170, 17' 0"	5,090, 16' 8"	4,990, 16' 4"	5,040, 16' 6"

- Digging forces with pin-on bucket

Boom	Unit	ME 6.5 m, 21' 4"		Std. 7.0 m, 23' 0"		
Arm		2.55 m, 8' 4"	2.55 m, 8' 4"	Std. 3.35 m, 11' 0"	3.9 m, 12' 10"	4.8 m, 15' 9"
Bucket tip radius	mm, in	1,923, 76"	1,810, 71"	1,810, 71"	1,810, 71"	1,810, 71"
Breakout force – bucket (Normal/Power boost)	SAE	kN lb	245.2/267.7 55,130/60,200	222.6/244.2 50,050/54,900	222.6/244.2 50,050/54,900	222.6/244.2 50,050/54,900
Tearout force – arm (Normal/Power boost)	SAE	kN lb	217.7/237.3 48,950/53,360	224.6/245.2 50,490/55,130	190.2/208.9 42,780/46,970	170.6/186.3 38,370/41,900
Rotation angle, bucket	deg	169°	183°	183°	183°	183°

LIFTING CAPACITY (At the arm end without bucket)

Note: For lifting capacity including bucket, simply subtract actual weight of the pin-on bucket or the bucket with quick coupler from the following values.

EC460B LC with fixed undercarriage (Std. shoe 900 mm, 36", counterweight 8,700 kg, 19,180 lb)

	Lifting hook related to ground level	4.5 m, 15'		6.0 m, 20'		7.5 m, 25'		9.0 m, 30'		Max. reach									
		Across under-carriage m / ft	Along under-carriage m / ft	t	lb	t	lb	t	lb	t	lb	t	lb	t	lb	m / ft			
ME boom 6.5 m 21' 4" + Arm 2.55 m 8' 4"	7.5 25'														*11.5 *25,520	10.8 24,310	7.2 / 23.4		
	6.0 20'					*12.9 *27,950	*12.9 *27,950	*11.8 *25,990	10.2 21,840						*11.1 *24,410	8.9 19,730	8.1 / 26.5		
	4.5 15'	*19.2 *41,210	*19.2 *41,210	*14.7 *31,740	13.8 29,810	*12.6 *27,410	9.9 21,330								*11.1 *24,350	7.9 17,430	8.7 / 28.4		
	3.0 10'	*22.1 *50,880	19.9 42,890	*16.7 *36,140	13.2 28,440	*13.6 *29,510	9.6 20,670								*11.4 *25,180	7.4 16,320	8.9 / 29.3		
	1.5 5'	*15.7 *38,970	*15.7 *38,970	*18.3 *39,570	12.7 27,390	*14.5 *31,380	9.3 20,090								11.6 25,510	7.3 16,050	8.9 / 29.3		
	0 0'	*23.2 *54,580	19.0 40,930	*18.9 *41,010	12.5 26,840	14.9 31,980	9.1 19,740								12.0 26,480	7.5 16,580	8.7 / 28.4		
	-1.5 -5'	*24.4 *52,940	19.1 41,080	*18.5 *40,130	12.4 26,750	*14.5 *31,230	9.1 19,710								*12.9 *28,490	8.2 18,190	8.1 / 26.6		
	-3.0 -10'	*21.8 *47,210	19.4 41,650	*16.8 *36,130	12.6 27,120										*13.0 *28,730	9.8 21,740	7.2 / 23.6		
	-4.5 -15'	*16.8 *35,850	*16.8 *35,850												*12.4 *28,180	*12.4 *28,180	5.8 / 18.4		
Std. boom 7.0 m 23' 0" + Arm 2.55 m 8' 4"	7.5 25'														*11.1 *24,420	9.5 21,300	7.9 / 25.6		
	6.0 20'					*12.6 *27,370	*12.6 *27,370	*11.3 *24,700	10.2 21,940						*11.0 *24,200	8.0 17,780	8.7 / 28.4		
	4.5 15'					*14.7 *31,610	13.6 29,450	*12.3 *26,620	9.9 21,270	*11.1 *24,390	7.5 16,100	*11.1 *24,370	7.2 15,920	9.2 / 30.2					
	3.0 10'					*16.8 *36,160	13.0 27,970	*13.4 *28,960	9.5 20,520	*11.6 *24,940	7.3 15,790	10.7 23,670	6.8 15,000	9.5 / 31.0					
	1.5 5'					*18.2 *39,440	12.5 26,940	*14.3 *30,950	9.2 19,900	11.4 24,610	7.2 15,490	10.6 23,410	6.7 14,770	9.5 / 31.0					
	0 0'					*18.8 *40,720	12.3 26,460	14.7 31,730	9.1 19,530	11.3 24,450	7.1 15,350	11.0 24,190	6.9 15,190	9.2 / 30.2					
	-1.5 -5'	*23.9 *51,980	18.9 40,620	*18.5 *40,000	12.3 26,410	*14.6 *31,560	9.0 19,470								11.9 26,330	7.5 16,470	8.7 / 28.5		
	-3.0 -10'	*21.8 *47,320	19.1 41,170	*17.1 *36,980	12.4 26,750	*13.3 *28,470	9.2 19,830								*12.3 *27,080	8.6 19,180	7.9 / 25.7		
	-4.5 -15'	*18.1 *38,830	*18.1 *38,830	*13.9 *29,550	12.8 27,650										*12.0 *26,420	11.3 25,350	6.6 / 21.3		
Std. boom 7.0 m 23' 0" + Std. arm 3.35 m 11' 0"	7.5 25'							*9.7 *21,320	*9.7 *21,320						*8.9 *19,580	8.3 18,500	8.7 / 28.3		
	6.0 20'							*10.3 *22,460	*10.3 *22,430	*9.9 *21,720	7.8 16,730	*8.7 *19,100	7.1 15,870	9.5 / 30.9					
	4.5 15'	*17.4 *37,210	*17.4 *37,210	*13.3 *28,780	*13.3 *28,780	*11.4 *24,690	10.1 21,690	*10.3 *22,250	7.6 16,420	*8.7 *19,210	6.5 14,400	*9.0 *19,860	6.2 13,630	10.2 / 33.3					
	3.0 10'	*22.1 *47,480	20.0 43,100	*15.6 *33,720	13.3 28,620	*12.6 *27,360	9.7 20,850	*11.0 *23,910	7.4 15,990	*9.0 *19,860	6.2 13,630								
	1.5 5'	*14.3 *34,560	*14.3 *34,560	*17.5 *37,830	12.7 27,340	*13.8 *29,820	9.3 20,110	11.5 24,720	7.2 15,580	*9.6 *21,120	6.1 13,400								
	0 0'	*17.6 *41,000	*17.6 40,300	*18.6 *40,180	12.3 26,590	*14.5 *31,480	9.1 19,600	11.3 24,400	7.1 15,290	9.9 21,720	6.2 13,690								
	-1.5 -5'	*25.0 *54,370	18.7 40,270	*18.7 *40,580	12.2 26,320	14.7 31,560	9.0 19,370	11.3 24,310	7.0 15,220	10.5 23,270	6.6 14,610								
	-3.0 -10'	*23.5 *50,970	18.9 40,640	*18.0 *38,890	12.3 26,440	*14.2 *30,540	9.0 19,470								*11.6 *25,570	7.5 16,530	8.7 / 28.4		
	-4.5 -15'	*20.6 *44,530	19.3 41,450	*15.9 *34,240	12.5 26,990										*11.8 *25,980	9.2 20,500	7.6 / 24.5		
Std. boom 7.0 m 23' 0" + Arm 3.9 m 12' 10"	7.5 25'														*8.8 *16,930	7.9 16,930	*7.1 *15,790	*7.1 *15,790	9.3 / 30.2
	6.0 20'							*9.5 *20,630	*9.5 *20,630	*9.1 *19,970	7.8 16,810	*7.0 *15,430	6.5 14,470	10.0 / 32.6					
	4.5 15'					*12.2 *26,350	*12.2 *26,350	*10.6 *22,960	10.1 21,770	*9.7 *21,080	7.6 16,410	*7.1 *15,540	6.0 13,200	10.4 / 34.2					
	3.0 10'	*20.2 *43,230	*20.2 *43,230	*14.6 *31,420	13.3 28,770	*11.9 *25,770	9.7 20,830	*10.4 *22,630	7.4 15,890	*7.3 *16,030	5.7 12,510								
	1.5 5'	*19.6 *46,670	19.0 40,990	*16.6 *35,950	12.6 27,250	*13.1 *28,470	9.3 19,960	*11.1 *24,200	7.1 15,400	*7.7 *16,980	5.6 12,280								
	0 0'	*19.4 *45,050	18.5 39,760	*18.0 *38,930	12.2 26,280	*14.1 *30,480	9.0 19,320	11.2 24,140	7.0 15,020	*8.4 *18,510	5.7 12,490								
	-1.5 -5'	*24.4 *54,430	18.3 39,450	*18.5 *40,040	12.0 25,830	14.5 31,170	8.8 18,980	11.1 23,930	6.9 14,830	*9.5 *20,960	6.0 13,230								
	-3.0 -10'	*24.0 *52,090	18.5 39,680	*18.1 *39,190	12.0 25,820	*14.2 *30,800	8.8 18,950	11.1 24,060	6.9 14,940	10.7 23,710	6.7 14,740								
	-4.5 -15'	*21.7 *46,940	18.8 40,370	*16.6 *35,820	12.2 26,220	*12.9 *27,610	8.9 19,340								*11.2 *24,670	8.0 17,750	8.2 / 26.7		
Std. boom 7.0 m 23' 0" + Arm 4.8 m 15' 9"	7.5 25'														*7.6 *16,770	*7.6 *16,770	*6.6 *14,470	6.5 *14,470	10.1 / 32.9
	6.0 20'														*7.9 *17,410	7.9 17,020	*6.5 *14,290	5.8 12,800	10.8 / 35.2
	4.5 15'																		
	3.0 10'	*17.0 *36,460	*17.0 *36,460	*12.8 *27,600	*12.8 *27,600	*10.7 *23,130	9.7 21,010	*9.4 *20,560	7.4 15,890	*6.8 *14,980	5.0 11,120								
	1.5 5'	*21.2 *45,780	19.4 41,730	*15.1 *32,720	12.7 27,490	*12.1 *26,180	9.3 19,960	*10.3 *22,410	7.1 15,270	*7.2 *15,860	4.9 10,870								
	0 0'	*23.6 *51,480	18.4 39,590	*16.9 *36,630	12.1 26,130	*13.2 *28,720	8.9 19,110	*11.1 *23,900	6.8 14,740	*7.8 *17,270	5.0 10,990								
	-1.5 -5'	*24.8 *53,660	18.0 38,690	*17.9 *38,830	11.8 25,350	*14.0 *30,340	8.6 18,560	10.9 23,520	6.7 14,400	8.5 18,680	5.2 11,510								
	-3.0 -10'	*24.5 *53,090	17.9 38,560	*18.1 *39,190	11.6 25,080	*14.2 *30,520	8.5 18,340	10.9 23,410	6.6 14,300	9.3 20,480	5.7 12,600								
	-4.5 -15'	*23.1 *49,880	18.1 38,980	*17.3 *37,450	11.7 25,260	*13.6 *29,300	8.6 18,470								*10.4 *23,050	6.6 14,660	9.1 / 29.8		

- Notes:
1. Machine in "Fine Mode-F" (Power Boost) for lifting capacities.
 2. The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting Capacity Standards.
 3. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.
 4. Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.
 5. Contains metric and U.S. measurement charts.

LIFTING CAPACITY (At the arm end without bucket)

Note: For lifting capacity including bucket, simply subtract actual weight of the pin-on bucket or the bucket with quick coupler from the following values.

EC460B LC with mechanically retractable undercarriage (Std. shoe 900 mm, 36", counterweight 8,700 kg, 19,180 lb)

 Across under-carriage  Along under-carriage	Lifting hook related to ground level m / ft	4.5 m, 15'		6.0 m, 20'		7.5 m, 25'		9.0 m, 30'		Max. reach		Max. m / ft		
		t	lb	t	lb	t	lb	t	lb	t	lb			
ME boom	7.5 25'											*11.4 *25,360 11.4 *25,360 7.4 / 23.8		
6.5 m	6.0 20'					*13.0 *28,230 *13.0 *28,230 *11.9 *26,060 11.0 23,570						*11.0 *24,330 9.5 21,040 8.2 / 26.8		
21' 4"	4.5 15'	*19.7 *42,150 *19.7 *42,150 *14.9 *32,150 *14.9 *32,150 *12.7 *27,590 10.7 23,020										*11.1 *24,380 8.5 18,730 8.7 / 28.6		
+ Arm	3.0 10'	*23.6 *51,590 21.7 46,720 *16.9 *36,520 14.3 30,780 *13.7 *29,710 10.4 22,350										*11.5 *25,270 8.0 17,640 9.0 / 29.4		
2.55 m	1.5 5'	*16.1 *39,550 *16.1 *39,550 *18.4 *39,790 13.8 29,760 *14.5 *31,510 10.1 21,780										11.9 26,290 7.9 17,450 8.9 / 29.3		
8' 4"	0 0'	*24.2 *55,520 20.9 44,940 *18.9 *41,040 13.6 29,240 *14.9 *32,240 9.9 21,450										12.4 27,430 8.2 18,130 8.6 / 28.4		
-1.5 -5'	*24.2 *52,560 21.0 45,130 *18.4 *39,910 13.5 29,190 *14.4 *30,990 9.9 21,470											*12.9 *28,540 9.1 20,010 8.1 / 26.4		
-3.0 -10'	*21.5 *46,470 21.3 45,760 *16.5 *35,520 13.7 29,620											*13.0 *28,700 10.9 24,180 7.1 / 23.3		
-4.5 -15'														
Std. boom	7.5 25'											*11.1 *24,420 10.3 23,000 7.9 / 25.6		
7.0 m	6.0 20'					*12.6 *27,370 *12.6 *27,370 *11.3 *24,700 11.0 23,700						*11.0 *24,200 8.7 19,240 8.7 / 28.5		
23' 0"	4.5 15'	*20.1 *43,050 *20.1 *43,050 *14.7 *31,610 *14.7 *31,610 *12.3 *26,620 10.7 23,020 *11.1 *24,390 8.1 17,450 *11.1 *24,370 7.8 17,260 9.2 / 30.2												
+ Arm	3.0 10'					*16.8 *36,160 14.1 30,420 *13.4 *28,960 10.3 22,260 *11.6 *25,240 8.0 17,140 11.0 24,370 7.4 16,280 9.5 / 31.0								
2.55 m	1.5 5'					*18.2 *39,440 13.6 29,370 *14.3 *30,950 10.0 21,630 11.8 25,340 7.8 16,830 10.9 24,110 7.3 16,050 9.5 / 31.1								
8' 4"	0 0'	*14.0 *30,380 *14.0 *30,380 *18.8 *40,720 13.4 28,880 *14.8 *31,990 9.9 21,260 11.7 25,180 7.7 16,690 11.3 24,910 7.5 16,520 9.2 / 30.2												
-1.5 -5'	*23.9 *51,980 20.8 44,620 *18.5 *40,000 13.4 28,830 *14.6 *31,560 9.8 21,200											*12.1 *26,690 8.1 17,910 8.7 / 28.5		
-3.0 -10'	*21.8 *47,320 21.0 45,180 *17.1 *36,980 13.5 29,170 *13.3 *28,470 10.0 21,560											*12.3 *27,080 9.4 20,840 7.9 / 25.7		
-4.5 -15'	*18.1 *38,830 *18.1 *38,830 *13.9 *29,550 13.9 *29,550											*12.0 *26,420 *12.0 *26,420 6.6 / 21.4		
Std. boom	7.5 25'											*8.9 *19,580 *8.9 *19,580 8.7 / 28.3		
7.0 m	6.0 20'											*8.7 *19,100 7.7 17,170 9.5 / 30.9		
23' 0"	4.5 15'	*17.4 *37,210 *17.4 *37,210 *13.3 *28,780 *13.3 *28,780 *11.4 *24,690 10.9 23,440 *10.3 *22,550 8.3 17,770 *8.7 *19,210 7.1 15,600 9.9 / 32.5												
+ Std. arm	3.0 10'	*22.1 *47,480 21.9 47,160 *15.6 *33,720 14.4 31,080 *12.6 *27,360 10.5 22,600 *11.0 *23,910 8.0 17,340 *9.0 *19,860 6.7 14,790 10.2 / 33.3												
3.35 m	1.5 5'	*14.3 *34,560 *14.3 *34,560 *17.5 *37,830 13.8 29,780 *13.8 *29,820 10.1 21,850 *11.6 *25,260 7.9 16,930 *9.6 *21,120 6.6 14,560 10.2 / 33.3												
11' 0"	0 0'	*17.6 *41,000 *17.6 *41,000 *18.6 *40,180 13.5 29,020 *14.5 *31,480 9.9 21,330 11.7 25,130 7.7 16,630 10.2 22,380 6.8 14,890 9.9 / 32.6												
-1.5 -5'	*25.0 *54,370 20.6 44,260 *18.7 *40,580 13.3 28,740 *14.7 *31,910 9.8 21,100 11.6 25,040 7.7 16,560 10.9 23,970 7.2 15,900 9.5 / 31.0													
-3.0 -10'	*23.5 *50,970 20.8 44,640 *18.0 *38,890 13.4 28,870 *14.2 *30,540 9.8 21,190											*11.6 *25,570 8.1 17,980 8.7 / 28.4		
-4.5 -15'	*20.6 *44,530 *20.6 *44,530 *15.9 *34,240 13.6 29,420 *12.0 *26,240 10.1 22,200											*11.8 *25,980 10.0 22,270 7.6 / 24.6		
Std. boom	7.5 25'											*8.8 *16,930 8.5 *16,930 *7.1 *15,790 *7.1 *15,790 9.3 / 30.2		
7.0 m	6.0 20'											*8.7 *19,100 7.7 17,170 9.5 / 30.9		
23' 0"	4.5 15'					*9.5 *20,630 *9.5 *20,630 *9.1 *19,970 8.5 18,170 *7.0 *15,430 *7.0 *15,430 10.0 / 32.7								
+ Arm	3.0 10'	*20.2 *43,230 *20.2 *43,230 *14.6 *31,420 14.5 31,240 *11.9 *25,770 10.5 22,580 *10.4 *22,630 8.0 17,240 *7.3 *16,030 6.2 13,600 10.7 / 35.0												
3.9 m	1.5 5'	*19.6 *46,670 *19.6 45,010 *16.6 *35,950 13.8 29,700 *13.1 *28,470 10.1 21,700 *11.1 *24,200 7.8 16,740 *7.7 *16,980 6.1 13,370 10.7 / 35.0												
12' 10"	0 0'	*19.4 *45,050 *19.4 43,750 *18.0 *38,930 13.3 28,700 *14.1 *30,480 9.8 21,050 11.5 24,870 7.6 16,360 *8.4 *18,510 6.2 13,610 10.4 / 34.3												
-1.5 -5'	*24.4 *54,430 20.2 43,430 *18.5 *40,040 13.1 28,250 *14.5 *31,410 9.6 20,700 11.4 24,660 7.5 16,170 *9.5 *20,960 6.5 14,420 10.0 / 32.7													
-3.0 -10'	*24.0 *52,090 20.3 43,670 *18.1 *39,190 13.1 28,240 *14.2 *30,800 9.6 20,680 *11.4 *24,430 7.5 16,280 *10.9 *23,970 7.3 16,070 9.3 / 30.3													
-4.5 -15'	*21.7 *46,940 20.6 44,380 *16.6 *35,820 13.3 28,650 *12.9 *27,610 9.7 21,070											*11.2 *24,670 8.7 19,320 8.2 / 26.8		
Std. boom	7.5 25'											*7.6 *16,770 *7.6 *16,770 *6.6 *14,470 *6.6 *14,470 10.1 / 33.0		
7.0 m	6.0 20'											*7.9 *17,410 *7.9 *17,410 *6.5 *14,290 *6.3 *13,900 10.8 / 35.2		
23' 0"	4.5 15'											*8.6 *18,780 8.3 17,880 *6.6 *14,470 *5.8 12,770 11.2 / 36.6		
+ Arm	3.0 10'	*17.0 *36,460 *17.0 *36,460 *12.8 *27,600 *12.8 *27,600 *10.7 *23,130 10.6 22,770 *9.4 *20,560 8.0 17,250 *6.8 *14,980 5.5 12,130 11.4 / 37.3												
4.8 m	1.5 5'	*21.2 *45,780 *21.2 *45,780 *15.1 *32,720 13.9 29,940 *12.1 *26,180 10.1 21,700 *10.3 *22,410 7.7 16,620 *7.2 *15,860 5.4 11,880 11.4 / 37.3												
15' 9"	0 0'	*23.6 *51,480 20.3 43,590 *16.9 *36,630 13.3 28,560 *13.2 *28,720 9.7 20,850 *11.1 *24,010 7.5 16,090 *7.8 *17,270 5.5 12,020 11.2 / 36.7												
-1.5 -5'	*24.8 *53,660 19.9 42,670 *17.9 *38,830 12.9 27,780 *14.0 *30,340 9.4 20,290 11.3 24,250 7.3 15,740 8.7 19,270 5.7 12,590 10.8 / 35.3													
-3.0 -10'	*24.5 *53,090 19.8 42,530 *18.1 *39,190 12.8 27,500 *14.2 *30,710 9.3 20,070 11.2 24,130 7.2 15,640 *9.5 21,120 6.2 13,780 10.1 / 33.1													
-4.5 -15'	*23.1 *49,880 20.0 42,970 *17.3 *37,450 12.8 27,680 *13.6 *29,300 9.4 20,200 *10.7 *23,640 7.3 15,830 *10.4 *23,050 7.2 16,020 9.1 / 29.8													

- Notes:
- Machine in "Fine Mode-F" (Power Boost) for lifting capacities.
 - The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting Capacity Standards.
 - Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.
 - Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.
 - Contains metric and U.S. measurement charts.

LIFTING CAPACITY (At the arm end without bucket)

Note: For lifting capacity including bucket, simply subtract actual weight of the pin-on bucket or the bucket with quick coupler from the following values.

EC460B LC with fixed undercarriage (Std. shoe 900 mm, 36", counterweight 9,300 kg, 20,510 lb)

	Lifting hook related to ground level	4.5 m, 15'		6.0 m, 20'		7.5 m, 25'		9.0 m, 30'		Max. reach							
		Across under-carriage m / ft	Along under-carriage m / ft	t	lb	t	lb	t	lb	t	lb	t	lb	t	lb	m / ft	
ME boom	7.5 25'														*11.6 *25,810 11.3 25,410 7.2 / 23.5		
6.5 m	6.0 20'					*13.0 *28,190 *13.0 *28,190 *11.9 *26,210 10.6 22,890								*11.2 *24,720 9.3 20,710 8.1 / 26.6			
21' 4"	4.5 15'	*19.3 *41,440 *19.3 *41,440 *14.8 *31,970 14.4 31,150 *12.7 *27,630 10.4 22,380													*11.2 *24,680 8.3 18,350 8.7 / 28.4		
+ Arm	3.0 10'	*22.2 *51,040 20.7 44,710 *16.8 *36,360 13.8 29,760 *13.7 *29,740 10.1 21,720													*11.6 *25,520 7.8 17,210 8.9 / 29.3		
2.55 m	1.5 5'	*15.9 *39,210 *15.9 *39,210 *18.4 *39,770 13.3 28,690 *14.6 *31,600 9.8 21,130													12.1 26,610 7.7 16,940 8.9 / 29.3		
8' 4"	0 0'	*23.3 *54,820 19.9 42,720 *19.0 *41,200 13.0 28,140 *15.0 *32,450 9.6 20,780													12.5 27,630 7.9 17,500 8.7 / 28.5		
-1.5 -5'	*24.4 *53,080 19.9 42,880 *18.6 *40,320 13.0 28,050 *14.6 *31,450 9.6 20,760														*13.0 *28,710 8.7 19,170 8.1 / 26.6		
-3.0 -10'	*21.9 *47,370 20.2 43,480 *16.9 *36,330 13.2 28,430														*13.1 *28,950 10.3 22,860 7.2 / 23.6		
-4.5 -15'	*16.9 *36,050 *16.9 *36,050														*12.5 *28,400 *12.5 *28,400 5.8 / 18.4		
Std. boom	7.5 25'							*11.0 *24,240 10.7 22,990							*11.1 *24,420 9.8 22,050 7.9 / 25.6		
7.0 m	6.0 20'					*12.6 *27,370 *12.6 *27,370 *11.3 *24,700 10.5 22,720									*11.0 *24,200 8.3 18,450 8.7 / 28.4		
23' 0"	4.5 15'					*14.7 *31,610 14.1 30,490 *12.3 *26,620 10.2 22,050 *11.1 *24,390 7.8 16,730									*11.1 *24,370 7.5 16,540 9.2 / 30.2		
+ Arm	3.0 10'					*16.8 *36,160 13.4 29,010 *13.4 *28,960 9.9 21,300 *11.6 *25,240 7.6 16,420									11.1 24,430 7.1 15,600 9.5 / 31.0		
2.55 m	1.5 5'					*18.2 *39,440 13.0 27,970 *14.3 *30,950 9.6 20,680 11.8 25,400 7.5 16,120									11.0 24,160 7.0 15,370 9.5 / 31.0		
8' 4"	0 0'					*18.8 *40,720 12.8 27,490 *14.8 *31,990 9.4 20,310 11.7 25,240 7.4 15,970									11.3 24,970 7.2 15,810 9.2 / 30.2		
-1.5 -5'	*23.9 *51,980 19.6 42,170 *18.5 *40,000 12.7 27,450 *14.6 *31,560 9.4 20,250														*12.1 *26,690 7.8 17,130 8.7 / 28.5		
-3.0 -10'	*21.8 *47,320 19.9 42,720 *17.1 *36,980 12.9 27,780 *13.3 *28,470 9.5 20,610														*12.3 *27,080 9.0 19,930 7.9 / 25.7		
-4.5 -15'	*18.1 *38,830 *18.1 *38,830 *13.9 *29,550 13.3 28,690														*12.0 *26,420 11.7 26,300 6.6 / 21.3		
Std. boom	7.5 25'							*9.7 *21,320 *9.7 *21,320							*8.9 *19,580 8.6 19,170 8.7 / 28.3		
7.0 m	6.0 20'							*10.3 *22,460 *10.3 *22,460							*8.7 *19,100 7.4 16,480 9.5 / 30.9		
23' 0"	4.5 15'	*17.4 *37,210 *17.4 *37,210 *13.3 *28,780 *13.3 *28,780 *11.4 *24,690 10.4 22,470 *10.3 *22,550						*9.9 *21,720 8.1 17,350							7.9 17,050 6.8 14,960 9.9 / 32.5		
+ Std. arm	3.0 10'	*22.1 *47,480 20.7 44,640 *15.6 *33,720 13.7 29,660 *12.6 *27,360 10.0 21,630 *11.0 *23,910						*10.0 *21,630 *11.0 *23,910 7.7 16,620							10.2 14,180 10.2 / 33.3		
3.35 m	1.5 5'	*14.3 *34,560 *14.3 *34,560 *17.5 *37,830 13.2 28,380 *13.8 *29,820 9.7 20,890						*11.6 *25,260 7.5 16,210							6.4 14,180 10.2 / 33.3		
11' 0"	0 0'	*17.6 *41,000 *17.6 *41,000 *18.6 *40,180 12.8 27,630 *14.5 *31,480 9.4 20,380						*11.7 *25,190 7.4 15,920							6.3 13,950 10.2 / 33.3		
-1.5 -5'	*25.0 *54,370 19.4 41,820 *18.7 *40,580 12.7 27,360 *14.7 *31,910 9.3 20,150							*11.6 *25,100 7.3 15,840							6.9 15,210 9.5 / 30.9		
-3.0 -10'	*23.5 *50,970 19.6 42,190 *18.0 *38,890 12.7 27,480 *14.2 *30,540 9.4 20,250														*11.6 *25,570 7.8 17,200 8.7 / 28.4		
-4.5 -15'	*20.6 *44,530 20.0 42,990 *15.9 *34,240 13.0 28,020														*11.8 *25,980 9.5 21,290 7.6 / 24.5		
Std. boom	7.5 25'															*8.8 *16,930 8.2 *16,930 *7.1 *15,790 *7.1 *15,790 9.3 / 30.2	
7.0 m	6.0 20'							*9.5 *20,630 *9.5 *20,630							*7.0 *15,430 6.8 15,040 10.0 / 32.6		
23' 0"	4.5 15'							*12.2 *26,350 *12.2 *26,350 *10.6 *22,960 10.5 22,550 *9.7 *21,080 7.9 17,030 *7.1 *15,540									6.2 13,730 10.4 / 34.2
+ Arm	3.0 10'	*20.2 *43,230 *20.2 *43,230 *14.6 *31,420 13.8 29,800 *11.9 *25,770 10.0 21,610 *10.4 *22,630						*10.0 *21,610 *10.4 *22,630 7.7 16,520 *7.3 *16,030 5.9 13,030 10.7 / 34.9									
3.9 m	1.5 5'	*19.6 *46,670 *19.6 42,530 *16.6 *35,950 13.1 28,290 *13.1 *28,470 9.6 20,740 *11.1 *24,200 7.4 16,020 *7.7 *16,980						*11.1 *24,200 7.4 16,020 *7.7 *16,980 5.8 12,800 10.7 / 34.9									
12' 10"	0 0'	*19.4 *45,050 19.2 41,310 *18.0 *38,930 12.7 27,310 *14.1 *30,480 9.3 20,100						*11.6 *24,100 7.3 15,640 *8.4 *18,510 5.9 13,020 10.4 / 34.2									
-1.5 -5'	*24.4 *54,430 19.1 41,000 *18.5 *40,040 12.5 26,860 *14.5 *31,410 9.2 19,750							*11.5 *24,720 7.2 15,450 *9.5 *20,960 6.2 13,790 10.0 / 32.7									
-3.0 -10'	*24.0 *52,090 19.2 41,230 *18.1 *39,190 12.5 26,850 *14.2 *30,800 9.1 19,730 *11.4 *24,430 7.2 15,570							*11.4 *24,430 7.2 15,570 *10.9 *23,970 6.9 15,360 9.3 / 30.3									
-4.5 -15'	*21.7 *46,940 19.5 41,920 *16.6 *35,820 12.6 27,260 *12.9 *27,610 9.3 20,110														*11.2 *24,670 8.3 18,460 8.2 / 26.7		
Std. boom	7.5 25'															*7.6 *16,770 *7.6 *16,770 *6.6 *14,470 *6.6 *14,470 10.1 / 32.9	
7.0 m	6.0 20'															*7.9 *17,410 *7.9 *17,410 *6.5 *14,290 *6.0 13,320 10.8 / 35.2	
23' 0"	4.5 15'															*7.7 *16,510 *7.7 *16,510 *6.6 *14,470 5.5 12,220 11.2 / 36.6	
+ Arm	3.0 10'	*17.0 *36,460 *17.0 *36,460 *12.8 *27,600 *12.8 *27,600 *10.7 *23,130 10.1 21,790 *9.4 *20,560 7.7 16,510 *6.8 *14,980 5.3 11,600 11.4 / 37.3															
4.8 m	1.5 5'	*21.2 *45,780 20.1 43,280 *15.1 *32,720 13.2 28,520 *12.1 *26,180 9.6 20,740 *10.3 *22,410 7.4 15,890 *7.2 *15,860 5.2 11,360 11.4 / 37.3															
15' 9"	0 0'	*23.6 *51,480 19.1 41,140 *16.9 *36,630 12.6 27,170 *13.2 *28,720 9.2 19,890 *11.1 *24,010 7.1 15,370 *7.8 *17,270 5.2 11,480 11.2 / 36.6															
-1.5 -5'	*24.8 *53,660 18.7 40,240 *17.9 *38,830 12.2 26,390 *14.0 *30,340 9.0 19,340														11.3 24,310 7.0 15,030 8.8 19,320 5.5 12,020 10.8 / 35.2		
-3.0 -10'	*24.5 *53,090 18.7 40,110 *18.1 *39,190 12.1 26,120 *14.2 *30,710 8.9 19,120														11.2 24,190 6.9 14,920 9.6 21,170 5.9 13,150 10.1 / 33.0		
-4.5 -15'	*23.1 *49,880 18.8 40,530 *17.3 *37,450 12.2 26,290 *13.6 *29,300 8.9 19,250														*10.4 *23,050 6.9 15,290 9.1 / 29.8		

- Notes:
1. Machine in "Fine Mode-F" (Power Boost) for lifting capacities.
 2. The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting Capacity Standards.
 3. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.
 4. Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.
 5. Contains metric and U.S. measurement charts.

LIFTING CAPACITY (At the arm end without bucket)

Note: For lifting capacity including bucket, simply subtract actual weight of the pin-on bucket or the bucket with quick coupler from the following values.

EC460B LC with mechanically retractable undercarriage (Std. shoe 900 mm, 36", counterweight 9,300 kg, 20,510 lb)

 Across under-carriage  Along under-carriage	Lifting hook related to ground level m / ft	4.5 m, 15'		6.0 m, 20'		7.5 m, 25'		9.0 m, 30'		Max. reach		Max. m / ft		
		t	lb	t	lb	t	lb	t	lb	t	lb			
ME boom	7.5 25'											*11.4 *25,360 *11.4 *25,360 7.4 / 23.8		
6.5 m	6.0 20'					*13.0 *28,230 *13.0 *28,230 *11.9 *26,060 11.3 24,370						*11.0 *24,330 9.8 21,770 8.2 / 26.8		
21' 4"	4.5 15'	*19.7 *42,150 *19.7 *42,150 *14.9 *32,150 *14.9 *32,150 *12.7 *27,590 11.1 23,830										*11.1 *24,380 8.8 19,410 8.7 / 28.6		
+ Arm	3.0 10'	*23.6 *51,590 22.5 48,330 *16.9 *36,520 14.8 31,850 *13.7 *29,710 10.7 23,150										*11.5 *25,270 8.3 18,300 9.0 / 29.4		
2.55 m	1.5 5'	*16.1 *39,550 *16.1 *39,550 *18.4 *39,790 14.3 30,830 *14.5 *31,510 10.5 22,580										12.3 27,100 8.2 18,110 8.9 / 29.3		
8' 4"	0 0'	*24.2 *55,520 21.7 46,550 *18.9 *41,040 14.1 30,310 *14.9 *32,240 10.3 22,250										*12.7 *27,890 8.5 18,810 8.6 / 28.4		
-1.5 -5'	-24.2 *52,560 21.8 46,740 *18.4 *39,910 14.0 30,260 *14.4 *30,990 10.3 22,270											*12.9 *28,540 9.4 20,760 8.1 / 26.4		
-3.0 -10'	-21.5 *46,470 *21.5 *46,470 *16.5 *35,520 14.2 30,690											*13.0 *28,700 11.3 25,060 7.1 / 23.3		
-4.5 -15'														
Std. boom	7.5 25'											*11.1 *24,420 10.6 23,780 7.9 / 25.6		
7.0 m	6.0 20'					*12.6 *27,370 *12.6 *27,370 *11.3 *24,700 *11.3 24,500						*11.0 *24,200 9.0 19,920 8.7 / 28.5		
23' 0"	4.5 15'	*20.1 *43,050 *20.1 *43,050 *14.7 *31,610 *14.7 *31,610 *12.3 *26,620 11.0 23,830 *11.1 *24,390 8.4 18,090 *11.1 *24,370 8.1 17,890 9.2 / 30.2												
+ Arm	3.0 10'					*16.8 *36,160 14.6 31,490 *13.4 *28,960 10.7 23,070 *11.6 *25,240 8.3 17,780 *11.3 *24,780 7.7 16,900 9.5 / 31.0								
2.55 m	1.5 5'					*18.2 *39,440 14.1 30,440 *14.3 *30,950 10.4 22,440 *12.0 *26,120 8.1 17,480 11.3 24,860 7.6 16,660 9.5 / 31.1								
8' 4"	0 0'	*14.0 *30,380 *14.0 *30,380 *18.8 *40,720 13.9 29,950 *14.8 *31,990 10.2 22,060 12.0 25,970 8.0 17,330 11.7 25,690 7.8 17,160 9.2 / 30.2												
-1.5 -5'	-23.9 *51,980 21.5 46,230 *18.5 *40,000 13.9 29,900 *14.6 *31,560 10.2 22,000											*12.1 *26,690 8.4 18,590 8.7 / 28.5		
-3.0 -10'	-21.8 *47,320 21.8 46,790 *17.1 *36,980 14.0 30,240 *13.3 *28,470 10.3 22,360											*12.3 *27,080 9.7 21,620 7.9 / 25.7		
-4.5 -15'	-18.1 *38,830 *18.1 *38,830 *13.9 *29,550 *13.9 *29,550											*12.0 *26,420 *12.0 *26,420 6.6 / 21.4		
Std. boom	7.5 25'											*8.9 *19,580 *8.9 *19,580 8.7 / 28.3		
7.0 m	6.0 20'											*8.7 *19,100 8.0 17,790 9.5 / 30.9		
23' 0"	4.5 15'	*17.4 *37,210 *17.4 *37,210 *13.3 *28,780 *13.3 *28,780 *11.4 *24,690 11.2 24,250 *10.3 *22,550 8.6 18,410 *8.7 *19,210 7.3 16,190 9.9 / 32.5												
+ Std. arm	3.0 10'	*22.1 *47,480 *22.1 *47,480 *15.6 *33,720 14.9 32,150 *12.6 *27,360 10.8 23,400 *11.0 *23,910 8.3 17,980 *9.0 *19,860 7.0 15,360 10.2 / 33.3												
3.35 m	1.5 5'	*14.3 *34,560 *14.3 *34,560 *17.5 *37,830 14.3 30,850 *13.8 *29,820 10.5 22,650 *11.6 *25,260 8.1 17,570 *9.6 *21,120 6.9 15,130 10.2 / 33.3												
11' 0"	0 0'	*17.6 *41,000 *17.6 *41,000 *18.6 *40,180 14.0 30,090 *14.5 *31,480 10.3 22,130 12.0 25,920 8.0 17,280 10.5 23,090 7.0 15,470 9.9 / 32.6												
-1.5 -5'	-25.0 *54,370 21.3 45,870 *18.7 *40,580 13.8 29,810 *14.7 *31,910 10.2 21,900 12.0 25,830 8.0 17,200 11.2 24,730 7.5 16,510 9.5 / 31.0													
-3.0 -10'	-23.5 *50,970 21.5 46,250 *18.0 *38,890 13.9 29,940 *14.2 *30,540 10.2 22,000											*11.6 *25,570 8.4 18,660 8.7 / 28.4		
-4.5 -15'	-20.6 *44,530 *20.6 *44,530 *15.9 *34,240 14.1 30,490 *12.0 *26,240 10.4 22,530											*11.8 *25,980 10.3 23,090 7.6 / 24.6		
Std. boom	7.5 25'											*8.8 *16,930 8.8 *16,930 *7.1 *15,790 *7.1 *15,790 9.3 / 30.2		
7.0 m	6.0 20'											*8.7 *19,100 8.0 17,790 9.5 / 30.9		
23' 0"	4.5 15'					*9.5 *20,630 *9.5 *20,630 *9.1 *19,970 8.7 18,810 *7.0 *15,430 *7.0 *15,430 10.0 / 32.7								
+ Arm	3.0 10'	*20.2 *43,230 *20.2 *43,230 *14.6 *31,420 *14.6 *31,420 *11.9 *25,770 10.8 23,380 *10.4 *22,630 8.3 17,880 *7.3 *16,030 6.4 14,140 10.7 / 35.0												
3.9 m	1.5 5'	*19.6 *46,670 *19.6 *46,620 *16.6 *35,950 14.3 30,770 *13.1 *28,470 10.4 22,500 *11.1 *24,200 8.1 17,380 *7.7 *16,980 6.3 13,910 10.7 / 35.0												
12' 10"	0 0'	*19.4 *45,050 *19.4 *45,050 *18.0 *38,930 13.8 29,770 *14.1 *30,480 10.1 21,850 *11.7 *25,380 7.9 17,000 *8.4 *18,510 6.4 14,160 10.4 / 34.3												
-1.5 -5'	-24.4 *54,430 21.0 45,050 *18.5 *40,040 13.6 29,320 *14.5 *31,410 10.0 21,510 11.8 25,450 7.8 16,810 *9.5 *20,960 6.8 15,000 10.0 / 32.7													
-3.0 -10'	-24.0 *52,090 21.1 45,280 *18.1 *39,190 13.6 29,310 *14.2 *30,800 10.0 21,480 *11.4 *24,430 7.8 16,930 *10.9 *23,970 7.5 16,700 9.3 / 30.3													
-4.5 -15'	-21.7 *46,940 21.4 45,990 *16.6 *35,820 13.8 29,720 *12.9 *27,610 10.1 21,870											*11.2 *24,670 9.0 20,050 8.2 / 26.8		
Std. boom	7.5 25'											*7.6 *16,770 *7.6 *16,770 *6.6 *14,470 *6.6 *14,470 10.1 / 33.0		
7.0 m	6.0 20'											*7.9 *17,410 *7.9 *17,410 *6.5 *14,290 *6.5 *14,290 10.8 / 35.2		
23' 0"	4.5 15'											*8.6 *18,780 8.6 18,520 *6.6 *14,470 6.0 13,270 11.2 / 36.6		
+ Arm	3.0 10'					*9.3 *20,120 *9.3 *20,120 *9.7 *21,080 8.5 18,400 *7.1 *15,540 6.7 14,880 10.4 / 34.2								
4.8 m	1.5 5'	*21.2 *45,780 *21.2 *45,780 *15.1 *32,720 14.4 31,010 *12.1 *26,180 10.4 22,500 *10.3 *22,410 8.0 17,260 *7.2 *15,860 5.6 12,380 11.4 / 37.3												
15' 9"	0 0'	*23.6 *51,480 21.0 45,200 *16.9 *36,630 13.8 29,640 *13.2 *28,720 10.0 21,650 *11.1 *24,010 7.8 16,730 *7.8 *17,270 5.7 12,520 11.2 / 36.7												
-1.5 -5'	-24.8 *53,660 20.6 44,280 *17.9 *38,830 13.4 28,850 *14.0 *30,340 9.8 21,090 *11.5 *25,000 7.6 16,380 *8.8 *19,440 5.9 13,120 10.8 / 35.3													
-3.0 -10'	-24.5 *53,090 20.5 44,140 *18.1 *39,190 13.3 28,570 *14.2 *30,710 9.7 20,870 *11.5 *24,920 7.5 16,280 *9.9 21,820 6.5 14,350 10.1 / 33.1													
-4.5 -15'	-23.1 *49,880 20.7 44,580 *17.3 *37,450 13.3 28,750 *13.6 *29,300 9.7 21,000 *10.7 *23,640 7.6 16,470 *10.4 *23,050 7.5 16,660 9.1 / 29.8													

- Notes:
- Machine in "Fine Mode-F" (Power Boost) for lifting capacities.
 - The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting Capacity Standards.
 - Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.
 - Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.
 - Contains metric and U.S. measurement charts.

LIFTING CAPACITY (At the arm end without bucket)

Note: For lifting capacity including bucket, simply subtract actual weight of the pin-on bucket or the bucket with quick coupler from the following values.

EC460B LC with fixed undercarriage (Std. shoe 900 mm, 36", counterweight 10,000 kg, 22,050 lb)

	Lifting hook related to ground level	4.5 m, 15'		6.0 m, 20'		7.5 m, 25'		9.0 m, 30'		Max. reach								
		Across under-carriage m / ft	Along under-carriage m / ft	t	lb	t	lb	t	lb	t	lb	t	lb	t	lb	m / ft		
ME boom 6.5 m 21' 4" + Arm 2.55 m 8' 4"	7.5 25'														*11.6 *25,810	*11.6 *25,810	7.2 / 23.5	
	6.0 20'					*13.0 *28,190	*13.0 *28,190	*11.9 *26,210	11.1 23,800						*11.2 *24,720	9.7 21,550	8.1 / 26.6	
	4.5 15'	*19.3 *41,440	*19.3 *41,440	*14.8 *31,970	*14.8 *31,970	*12.7 *27,630	10.8 23,290								*11.2 *24,680	8.6 19,120	8.7 / 28.4	
	3.0 10'	*22.2 *51,040	21.5 46,520	*16.8 *36,360	14.3 30,970	*13.7 *29,740	10.5 22,630								*11.6 *25,520	8.1 17,960	8.9 / 29.3	
	1.5 5'	*15.9 *39,210	*15.9 *39,210	*18.4 *39,770	13.9 29,900	*14.6 *31,600	10.2 22,040								*12.4 *27,330	8.0 17,690	8.9 / 29.3	
	0 0'	*23.3 *54,820	20.7 44,520	*19.0 *41,200	13.6 29,350	*15.0 *32,450	10.1 21,690								*12.7 *28,040	8.3 18,280	8.7 / 28.5	
	-1.5 -5'	*24.4 *53,080	20.8 44,690	*18.6 *40,320	13.6 29,260	*14.6 *31,450	10.0 21,670								*13.0 *28,710	9.1 20,010	8.1 / 26.6	
	-3.0 -10'	*21.9 *47,370	21.1 45,290	*16.9 *36,330	13.7 29,640										*13.1 *28,950	10.7 23,840	7.2 / 23.6	
	-4.5 -15'	*16.9 *36,050	*16.9 *36,050												*12.5 *28,400	*12.5 *28,400	5.8 / 18.4	
Std. boom 7.0 m 23' 0" + Arm 2.55 m 8' 4"	7.5 25'							*11.0 *24,240	*11.0 23,970						*11.1 *24,420	10.3 23,010	7.9 / 25.6	
	6.0 20'					*12.6 *27,370	*12.6 *27,370	*11.3 *24,700	11.0 23,700						*11.0 *24,200	8.7 19,290	8.7 / 28.4	
	4.5 15'					*14.7 *31,610	*14.7 *31,610	*12.3 *26,620	10.7 23,040	*11.1 *24,390	8.1 17,510	*11.1 *24,370	7.8 17,320	9.2 / 30.2				
	3.0 10'					*16.8 *36,160	14.0 30,320	*13.4 *28,960	10.3 22,280	*11.6 *25,240	8.0 17,210	*11.3 *24,780	7.4 16,360	9.5 / 31.0				
	1.5 5'					*18.2 *39,440	13.6 29,280	*14.3 *30,950	10.0 21,660	*12.0 *26,120	7.8 16,900	11.4 25,140	7.3 16,120	9.5 / 31.0				
	0 0'					*18.8 *40,720	13.4 28,800	*14.8 *31,990	9.9 21,300	*12.1 *26,260	7.8 16,760	11.8 25,970	7.5 16,590	9.2 / 30.2				
	-1.5 -5'	*23.9 *51,980	20.5 44,120	*18.5 *40,000	13.3 28,750	*14.6 *31,560	9.8 21,230								*12.1 *26,690	8.1 17,970	8.7 / 28.5	
	-3.0 -10'	*21.8 *47,320	20.8 44,670	*17.1 *36,980	13.5 29,090	*13.3 *28,470	10.0 21,590								*12.3 *27,080	9.4 20,880	7.9 / 25.7	
	-4.5 -15'	*18.1 *38,830	*18.1 *38,830	*13.9 *29,550	13.9 *29,550										*12.0 *26,420	*12.0 *26,420	6.6 / 21.3	
Std. boom 7.0 m 23' 0" + Std. arm 3.35 m 11' 0"	7.5 25'							*9.7 *21,320	*9.7 *21,320						*8.9 *19,580	*8.9 *19,580	8.7 / 28.3	
	6.0 20'							*10.3 *22,460	*10.3 *22,460	*9.9 *21,720	8.4 18,140	*8.7 *19,100	7.8 17,240	9.5 / 30.9				
	4.5 15'	*17.4 *37,210	*17.4 *37,210	*13.3 *28,780	*13.3 *28,780	*11.4 *24,690	10.9 23,450	*10.3 *22,550	8.3 17,830	*8.7 *19,210	7.1 15,680	9.9 / 32.5						
	3.0 10'	*22.1 *47,480	21.6 46,590	*15.6 *33,720	14.3 30,960	*12.6 *27,360	10.5 22,610	*11.0 *23,910	8.1 17,400	*9.0 *19,860	6.7 14,870	10.2 / 33.3						
	1.5 5'	*14.3 *34,560	*14.3 *34,560	*17.5 *37,830	13.8 29,680	*13.8 *29,820	10.1 21,870	*11.6 *25,260	7.9 16,990	*9.6 *21,120	6.6 14,640	10.2 / 33.3						
	Std. arm	0 0'	*17.6 *41,000	*17.6 *41,000	*18.6 *40,180	13.4 28,940	*14.5 *31,480	9.9 21,360	*12.0 *26,130	7.7 16,710	*10.5 *23,160	6.8 14,970	9.9 / 32.5					
	-1.5 -5'	*25.0 *54,370	20.4 43,770	*18.7 *40,580	13.3 28,660	*14.7 *31,910	9.8 21,130	*12.0 *25,920	7.7 16,630	*11.2 *24,800	7.2 15,970	9.5 / 30.9						
	-3.0 -10'	*23.5 *50,970	20.5 44,140	*18.0 *38,890	13.4 28,790	*14.2 *30,540	9.8 21,230								*11.6 *25,570	8.1 18,040	8.7 / 28.4	
	-4.5 -15'	*20.6 *44,530	*20.6 *44,530	*15.9 *34,240	13.6 29,330										*11.8 *25,980	10.0 22,300	7.6 / 24.5	
Std. boom 7.0 m 23' 0" + Arm 3.9 m 12' 10"	7.5 25'							*9.5 *20,630	*9.5 *20,630	*8.8 *16,930	8.6 *16,930	*7.1 *15,790	*7.1 *15,790	9.3 / 30.2				
	6.0 20'							*12.2 *26,350	*12.2 *26,350	*10.6 *22,960	*10.6 *22,960	*9.7 *21,080	8.5 18,220	*7.0 *15,430	*7.0 *15,430	10.0 / 32.6		
	4.5 15'																	
	3.0 10'	*20.2 *43,230	*20.2 *43,230	*14.6 *31,420	14.4 31,110	*11.9 *25,770	10.5 22,590	*10.4 *22,630	8.0 17,310	*7.3 *16,030	6.2 13,690	10.7 / 34.9						
	1.5 5'	*19.6 *46,670	*19.6 *44,480	*16.6 *35,950	13.7 29,600	*13.1 *28,470	10.1 21,720	*11.1 *24,200	7.8 16,810	*7.7 *16,980	6.1 13,460	10.7 / 34.9						
	0 0'	*19.4 *45,050	*19.4 *43,260	*18.0 *38,930	13.3 28,620	*14.1 *30,480	9.8 21,080	*11.7 *25,380	7.6 16,430	*8.4 *18,510	6.2 13,700	10.4 / 34.2						
	-1.5 -5'	*24.4 *54,430	20.0 42,950	*18.5 *40,040	13.1 28,170	*14.5 *31,410	9.6 20,740	*11.9 *25,740	7.5 16,240	*9.5 *20,960	6.6 14,500	10.0 / 32.7						
	-3.0 -10'	*24.0 *52,090	20.1 43,180	*18.1 *39,190	13.1 28,160	*14.2 *30,800	9.6 20,710	*11.4 *24,430	7.6 16,360	*10.9 *23,970	7.3 16,140	9.3 / 30.3						
	-4.5 -15'	*21.7 *46,940	20.4 43,870	*16.6 *35,820	13.2 28,570	*12.9 *27,610	9.8 21,100								*11.2 *24,670	8.7 19,360	8.2 / 26.7	
Std. boom 7.0 m 23' 0" + Arm 4.8 m 15' 9"	7.5 25'														*7.6 *16,770	*7.6 *16,770	10.1 / 32.9	
	6.0 20'														*7.9 *17,410	*7.9 *17,410	10.8 / 35.2	
	4.5 15'														*6.5 *14,290	6.3 13,970	11.2 / 36.6	
	3.0 10'	*17.0 *36,460	*17.0 *36,460	*12.8 *27,600	*12.8 *27,600	*10.7 *23,130	10.6 22,770	*9.4 *20,560	8.0 17,300	*6.8 *14,980	5.5 12,210	11.4 / 37.3						
	1.5 5'	*21.2 *45,780	21.0 45,230	*15.1 *32,720	13.8 29,830	*12.1 *26,180	10.1 21,720	*10.3 *22,410	7.7 16,680	*7.2 *15,860	5.4 11,970	11.4 / 37.3						
	0 0'	*23.6 *51,480	20.0 43,090	*16.9 *36,630	13.2 28,470	*13.2 *28,720	9.7 20,870	*11.1 *24,010	7.5 16,160	*7.8 *17,270	5.5 12,100	11.2 / 36.6						
	-1.5 -5'	*24.8 *53,660	19.6 42,190	*17.9 *38,830	12.9 27,700	*14.0 *30,340	9.4 20,320	*11.5 *25,000	7.3 15,810	*8.8 *19,440	5.7 12,680	10.8 / 35.2						
	-3.0 -10'	*24.5 *53,090	19.6 42,060	*18.1 *39,190	12.7 27,430	*14.2 *30,710	9.3 20,100	*11.5 *24,950	7.3 15,710	*10.0 *21,970	6.3 13,860	10.1 / 33.0						
	-4.5 -15'	*23.1 *49,880	19.7 42,480	*17.3 *37,450	12.8 27,600	*13.6 *29,300	9.4 20,240								*10.4 *23,050	7.2 16,090	9.1 / 29.8	

- Notes:
1. Machine in "Fine Mode-F" (Power Boost) for lifting capacities.
 2. The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting Capacity Standards.
 3. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.
 4. Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.
 5. Contains metric and U.S. measurement charts.

LIFTING CAPACITY (At the arm end without bucket)

Note: For lifting capacity including bucket, simply subtract actual weight of the pin-on bucket or the bucket with quick coupler from the following values.

EC460B LC with mechanically retractable undercarriage (Std. shoe 900 mm, 36", counterweight 10,000 kg, 22,050 lb)

 Across under-carriage  Along under-carriage	Lifting hook related to ground level m / ft	4.5 m, 15'		6.0 m, 20'		7.5 m, 25'		9.0 m, 30'		Max. reach		Max. m / ft	
		t	lb	t	lb	t	lb	t	lb	t	lb		
ME boom	7.5 25'											*11.4 *25,360 *11.4 *25,360 7.4 / 23.8	
6.5 m	6.0 20'					*13.0 *28,230 *13.0 *28,230 *11.9 *26,060 11.8 25,310						*11.0 *24,330 10.2 22,630 8.2 / 26.8	
21' 4"	4.5 15'	*19.7 *42,150 *19.7 *42,150 *14.9 *32,150 *14.9 *32,150 *12.7 *27,590 11.5 24,760										*11.1 *24,380 9.1 20,210 8.7 / 28.6	
+ Arm	3.0 10'	*23.6 *51,590 23.1 50,210 *16.9 *36,520 15.3 33,100 *13.7 *29,710 11.2 24,090										*11.5 *25,270 8.6 19,070 9.0 / 29.4	
2.55 m	1.5 5'	*16.1 *39,550 *16.1 *39,550 *18.4 *39,790 14.9 32,080 *14.5 *31,510 10.9 23,520										*12.3 *27,180 8.6 18,880 8.9 / 29.3	
8' 4"	0 0'	*24.2 *55,520 22.5 48,430 *18.9 *41,040 14.6 31,560 *14.9 *32,240 10.7 23,190										*12.7 *27,890 8.9 19,610 8.6 / 28.4	
-1.5 -5'	-24.2 *52,560 22.6 48,620 *18.4 *39,910 14.6 31,510 *14.4 *30,990 10.7 23,200											*12.9 *28,540 9.8 21,630 8.1 / 26.4	
-3.0 -10'	-21.5 *46,470 *21.5 *46,470 *16.5 *35,520 14.8 31,940											*13.0 *28,700 11.7 26,080 7.1 / 23.3	
-4.5 -15'													
Std. boom	7.5 25'											*11.1 *24,420 11.0 *24,420 7.9 / 25.6	
7.0 m	6.0 20'					*12.6 *27,370 *12.6 *27,370 *11.3 *24,700 *11.3 *24,700						*11.0 *24,200 9.3 20,720 8.7 / 28.5	
23' 0"	4.5 15'	*20.1 *43,050 *20.1 *43,050 *14.7 *31,610 *14.7 *31,610 *12.3 *26,620 11.5 24,760										*11.1 *24,370 8.4 18,640 9.2 / 30.2	
+ Arm	3.0 10'					*16.8 *36,160 15.2 32,740 *13.4 *28,960 11.1 24,000 *11.6 *25,240 8.6 18,530							*11.3 *24,780 8.0 17,620 9.5 / 31.0
2.55 m	1.5 5'					*18.2 *39,440 14.7 31,690 *14.3 *30,950 10.8 23,370 *12.0 *26,120 8.4 18,220							*11.5 *25,350 7.9 17,380 9.5 / 31.1
8' 4"	0 0'	*14.0 *30,380 *14.0 *30,380 *18.8 *40,720 14.5 31,200 *14.8 *31,990 10.7 23,000 *12.1 *26,280 8.4 18,080										*11.8 *26,020 8.1 17,900 9.2 / 30.2	
-1.5 -5'	-23.9 *51,980 22.4 48,110 *18.5 *40,000 14.5 31,150 *14.6 *31,560 10.6 22,940											*12.1 *26,690 8.8 19,380 8.7 / 28.5	
-3.0 -10'	-21.8 *47,320 *21.8 *47,320 *17.1 *36,980 14.6 31,490 *13.3 *28,470 10.8 23,300											*12.3 *27,080 10.2 22,520 7.9 / 25.7	
-4.5 -15'	-18.1 *38,830 *18.1 *38,830 *13.9 *29,550 *13.9 *29,550											*12.0 *26,420 *12.0 *26,420 6.6 / 21.4	
Std. boom	7.5 25'											*8.9 *19,580 *8.9 *19,580 8.7 / 28.3	
7.0 m	6.0 20'											*8.7 *19,100 8.3 18,510 9.5 / 30.9	
23' 0"	4.5 15'	*17.4 *37,210 *17.4 *37,210 *13.3 *28,780 *13.3 *28,780 *11.4 *24,690 *11.4 *24,690 *10.3 *22,550 8.9 19,160										*8.7 *19,210 7.6 16,860 9.9 / 32.5	
+ Std. arm	3.0 10'	*22.1 *47,480 *22.1 *47,480 *15.6 *33,720 15.5 33,400 *12.6 *27,360 11.3 24,330 *11.0 *23,910 8.7 18,730										*9.0 *19,860 7.3 16,020 10.2 / 33.3	
3.35 m	1.5 5'	*14.3 *34,560 *14.3 *34,560 *17.5 *37,830 14.9 32,100 *13.8 *29,820 10.9 23,580 *11.6 *25,260 8.5 18,310										*9.6 *21,120 7.2 15,790 10.2 / 33.3	
11' 0"	0 0'	*17.6 *41,000 *17.6 *41,000 *18.6 *40,180 14.5 31,340 *14.5 *31,480 10.7 23,060 *12.0 *26,130 8.4 18,020										*10.5 *23,160 7.3 16,150 9.9 / 32.6	
-1.5 -5'	-25.0 *54,370 22.2 47,750 *18.7 *40,580 14.4 31,060 *14.7 *31,910 10.6 22,840 *12.0 *25,920 8.3 17,950											*11.2 *24,800 7.8 17,230 9.5 / 31.0	
-3.0 -10'	-23.5 *50,970 22.4 48,130 *18.0 *38,890 14.5 31,190 *14.2 *30,540 10.6 22,930											*11.6 *25,570 8.8 19,460 8.7 / 28.4	
-4.5 -15'	-20.6 *44,530 *20.6 *44,530 *15.9 *34,240 14.7 31,740 *12.0 *26,240 10.9 23,450											*11.8 *25,980 10.8 24,050 7.6 / 24.6	
Std. boom	7.5 25'											*8.8 *16,930 *8.8 *16,930 *7.1 *15,790 *7.1 *15,790 9.3 / 30.2	
7.0 m	6.0 20'											*7.0 *15,430 *7.0 *15,430 10.0 / 32.7	
23' 0"	4.5 15'					*9.5 *20,630 *9.5 *20,630 *9.1 *19,970 9.1 19,560 *7.0 *15,430 *7.0 *15,430 10.4 / 34.2							
+ Arm	3.0 10'	*20.2 *43,230 *20.2 *43,230 *14.6 *31,420 *14.6 *31,420 *11.9 *25,770 11.3 24,320 *10.4 *22,630 8.6 18,630 *7.3 *16,030 6.7 14,760 10.7 / 35.0											
3.9 m	1.5 5'	*19.6 *46,670 *19.6 *46,670 *16.6 *35,950 14.8 32,020 *13.1 *28,470 10.9 23,440 *11.1 *24,200 8.4 18,130 *7.7 *16,980 6.6 14,530 10.7 / 35.0											
12' 10"	0 0'	*19.4 *45,050 *19.4 *45,050 *18.0 *38,930 14.4 31,020 *14.1 *30,480 10.6 22,790 *11.7 *25,380 8.2 17,750 *8.4 *18,510 6.7 14,800 10.4 / 34.3											
-1.5 -5'	-24.4 *54,430 21.8 46,930 *18.5 *40,040 14.2 30,570 *14.5 *31,410 10.4 22,440 *11.9 *25,740 8.1 17,560 *9.5 *20,960 7.1 15,670 10.0 / 32.7												
-3.0 -10'	-24.0 *52,090 21.9 47,160 *18.1 *39,190 14.2 30,560 *14.2 *30,800 10.4 22,420 *11.4 *24,430 8.2 17,670 *10.9 *23,970 7.9 17,440 9.3 / 30.3												
-4.5 -15'	-21.7 *46,940 *21.7 *46,940 *16.6 *35,820 14.4 30,970 *12.9 *27,610 10.5 22,800											*11.2 *24,670 9.4 20,910 8.2 / 26.8	
Std. boom	7.5 25'											*7.6 *16,770 *7.6 *16,770 *6.6 *14,470 *6.6 *14,470 10.1 / 33.0	
7.0 m	6.0 20'											*7.9 *17,410 *7.9 *17,410 *6.5 *14,290 *6.5 *14,290 10.8 / 35.2	
23' 0"	4.5 15'											*8.6 *18,780 *8.6 *18,780 *6.6 *14,470 6.3 13,860 11.2 / 36.6	
+ Arm	3.0 10'											*9.4 *20,560 8.7 18,630 *6.8 *14,980 6.0 13,200 11.4 / 37.3	
4.8 m	1.5 5'	*21.2 *45,780 *21.2 *45,780 *15.1 *32,720 15.0 32,260 *12.1 *26,180 10.9 23,440 *10.3 *22,410 8.4 18,000 *7.2 *15,860 5.9 12,960 11.4 / 37.3											
15' 9"	0 0'	*23.6 *51,480 21.9 47,080 *16.9 *36,630 14.3 30,880 *13.2 *28,720 10.5 22,580 *11.1 *24,010 8.1 17,480 *7.8 *17,270 6.0 13,110 11.2 / 36.7											
-1.5 -5'	-24.8 *53,660 21.5 46,160 *17.9 *38,830 14.0 30,100 *14.0 *30,340 10.2 22,030 *11.5 *25,000 7.9 17,130 *8.8 *19,440 6.2 13,740 10.8 / 35.3												
-3.0 -10'	-24.5 *53,090 21.4 46,020 *18.1 *39,190 13.8 29,820 *14.2 *30,710 10.1 21,800 *11.5 *24,950 7.9 17,030 *10.0 *21,970 6.8 15,010 10.1 / 33.1												
-4.5 -15'	-23.1 *49,880 21.6 46,460 *17.3 *37,450 13.9 30,000 *13.6 *29,300 10.2 21,940 *10.7 *23,640 8.0 17,220 *10.4 *23,050 7.8 17,420 9.1 / 29.8												

- Notes:
1. Machine in "Fine Mode-F" (Power Boost) for lifting capacities.
 2. The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting Capacity Standards.
 3. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.
 4. Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.
 5. Contains metric and U.S. measurement charts.

NOTES

NOTES

STANDARD EQUIPMENT

Engine

Turbocharged, 4-stroke diesel engine with water cooling, direct injection and charged air cooler that meets EPA (Environment Protection Agency) Tier 3 emission standards

3-stage air filter with indicator and precleaner

Air intake heater

Electric engine shut-off

Fuel filter and water separator

Coolant filter

Alternator, 80 A

Electric/Electronic control system

Contronics

- Advanced mode control system
- Self-diagnostic system

Machine status indication

Engine speed sensing power control

Automatic idling system

One-touch power boost

Safety stop/start function

Adjustable monitor

Travel alarm

Master switch

Engine restart prevention circuit

High-capacity halogen lights:

- Frame-mounted 2
- Boom-mounted 4

Batteries, 2 x 12 V / 200 Ah

Start motor, 24 V / 6.6 kW

Hydraulic system

Automatic hydraulic system

- Summation system
- Boom priority
- Arm priority
- Swing priority

Boom and arm regeneration valves

Swing anti-rebound valves

Boom and arm holding valves

Pump flow control for hammer & shear

Multi-stage filtering system

Cylinder cushioning

Cylinder contamination seals

Auxiliary hydraulic valve

Straight travel circuit

Automatic two-speed travel motors

Hydraulic oil, ISO VG 46

Superstructure

Access way with handrail

Full height counterweight
10,000 kg, **22,050 lb**

Tool storage area

Punched metal anti-slip plates

Undercover (heavy-duty 4,5 mm,
0.18")

Cab and interior

Fabric seat with heater and air suspension

Pilot-operated wrist control joysticks with 3 switches each

Heater & air-conditioner, automatic

Hydraulic dampening cab mounts

Adjustable operator seat and joystick control console

Flexible antenna

Hydraulic safety lock lever

Cab, all-weather sound suppressed, includes:

- Ashtray
- Cup holder
- Lighter
- Door locks
- Tinted glass
- Floor mat

- Horn

- Large storage area

- Pull-up type front window

- Removable lower windshield

- Seat belt

- Safety glass

- Sun shield, front, roof, rear

- Windshield wiper with intermittent feature

- Stereo cassette radio

Anti-vandalism kit assembly preparation

Master ignition key

Undercarriage

Hydraulic track adjusters

Greased and sealed track chain

Track guards

Undercover (4,5 mm, **0.18"**)

Track shoes

Track shoes 900 mm, **36"** with triple grousers

Digging equipment

Boom: 7.0 m, **23' 0"**

Arm: 3.35 m, **11' 0"**

OPTIONAL EQUIPMENT (Standard in certain markets)

Engine

Block heater: 120 V

Oil bath precleaner

Diesel coolant heater

Fuel filler pump: 50 l/min, **13.2 gpm**
with automatic shut-off

Electric

Extra lamps:

- Cab-mounted 3 (front 2, rear 1)
- Counterweight-mounted 1

Overload warning device

Rotating warning beacon

Hydraulic system

Hose rupture valve: boom, arm

Hydraulic piping

- Hammer & shear:
 - 1 pump flow
 - 2 pump flow
 - Additional return filter
 - Extra piping for slope & rotator
- Slope & rotator
- Grapple
- Oil leak (drain) line
- Quick coupler piping

Volvo hydraulic quick-coupler, S3 size

Hydraulic oil, ISO VG 32

Hydraulic oil, ISO VG 68

Hydraulic oil, biodegradable 32

Hydraulic oil, biodegradable 46

Straight travel pedal

Cab and interior

Fabric seat

Control joystick with semi-long levers

Control joystick with 5 switches each

Air-conditioner, manual

Falling object guard (FOG)

Cab-mounted falling object protective structures (FOPS)

Sunlight protection, roof (steel)

Rain shield, front

Safety screen for front window

Lower wiper

Anti-vandalism kit

Undercarriage

Full track guards

Undercover (heavy-duty 10 mm, **0.39"**)

Mechanically retractable track gauge

Track shoes

600/700/800 mm,
24"/28"/32" track shoes with triple grousers

600 mm, **24"** track shoe with double grouser

Digging equipment

Boom: ME 6.5 m, **21' 4"**

Arm: 2.55/3.9/4.8 m

8' 4"/12' 10"/15' 9"

3.35 m, **11' 0"** heavy-duty

Service

Hand lamp

Spare parts

Tool kit, full scale

All products are not available in all markets. Under our policy of continuous improvement, we reserve the right to change specifications and designs without prior notice. The illustrations do not necessarily show the standard version of the machine.



Construction Equipment
www.volvo.com

Ref. No. 22 4 435 1646
Printed in USA 2005.12-1,0
Volvo, Asheville

English
EXB