

VOLVO ARTICULATED HAULERS

A25D 4X4



VOLVO

The perfect machine for mines, tunnels and quarries



Outstanding turn radius and turn-around capacity

A prerequisite for operating in tunnels is a tight turn radius and the ability to turn around in narrow passages. The Volvo A25D 4x4 is uniquely equipped with turn-around wheels, making it possible to turn around the hauler in tunnels as narrow as 9,5 metres.

The machine is very maneuverable even without the turn-around wheels, due to the short wheel base which is 400 mm shorter than on the earlier model.

This gives exceptional mobility, making the A25D 4x4 a flexible all-round machine suitable for a wide range of applications.

Volvo's articulated haulers have once again proven their availability, flexibility and capacity when it comes to cost-effective hauling of earth and other materials. With articulated steering and the frame joint, they have often proved to be superior to other methods and vehicles in really tough off-road conditions. The new four-wheel A25D 4x4 combines the power, effectiveness and productivity of the larger haulers with outstanding maneuverability and mobility. A25D 4x4 is the perfect choice for underground operations, in narrow tunnels and in quarries.

Short dump time

The new design makes the D-series an award-winner with its excellent combination of function and form.

The load body of the A25D 4x4 is of a completely new design, with flat bottom and no chute. Combined with low dump height, these features give the very short dump time.

Few articulated haulers on the market – if any – have the same short dump time; important seconds that add up to valuable and productive time over many long shifts.

Better performance and higher productivity


A25D 4x4's excellent maneuverability, short dump time and increased

payload combine to give 14% higher productivity than the earlier model A25C 4x4.

A safe and comfortable workplace

Already in the 1960s, it was Volvo who developed and created the articulated hauler concept. Since then we've been the leaders in the market, not the least when it comes to safety and the operator's environment. Safety has characterized the development of the A25D 4x4, down to the last detail. The ergonomically designed, safe and comfortable operator's environment makes the operator effective, even during those long shifts.

A25D 4x4 with fifth wheel equipped for alternative segment

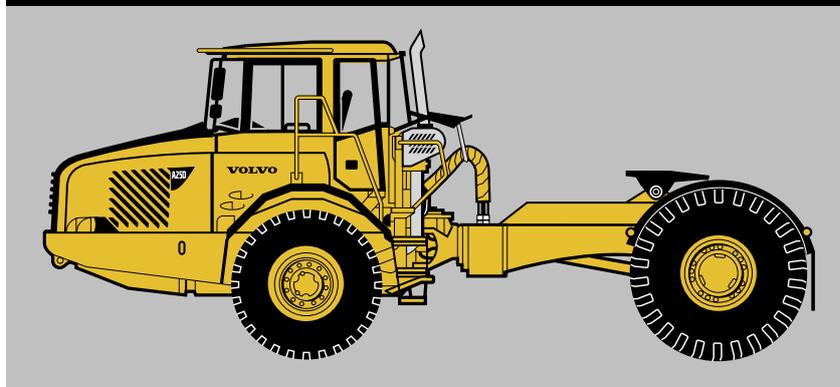

- High performance and productivity
- Short dump time: 7 sec.
- ROPS and FOPS is standard
- Volvo's unique hydromechanical self-compensating steering system
- Low sound level
- Flexible and maneuverable
- Wide door opening without threshold



The A25D 4x4 in detail

Service

The computerized information system monitors all fluid levels, minimizing daily and weekly service times.

Time to next service and the status of vital vehicle systems is shown to the operator on a display in the instrument panel.

Service accessibility: Fold-down front grill with access ladder to remote filter bank, located in front of engine.

Large, 90° opening hood for total engine access.

Remote drain hoses and swing-out radiator for easy cleaning.

Fill capacities

Crankcase.....	40 l
Fuel tank.....	400 l
Cooling system	115 l
Transmission total	41 l
Dropbox.....	8,5 l
Front axle.....	33 l
Rear axle.....	52 l
Hydraulic tank	175 l

Engine

Volvo inline 6-cylinder, direct injected electronically controlled, turbocharged, intercooled 4-stroke low-emission diesel engine with wet replaceable cylinder liners.

Fan: Hydrostatically driven, thermostatically controlled variable speed radiator fan consuming power only when needed.

Engine brake: Exhaust retarder.

Make, model	Volvo D9AAAE2*
Make, model	Volvo D9AABE2**
Max power at	35 r/s (2 100 r/min)
SAE J1995 Gross	224 kW (305 hp)
Flywheel power at	35 r/s (2 100 r/min)
SAE J1349 Net, DIN 6271***	223 kW (303 hp)
Max torque at	20 r/s (1 200 r/min)
SAE J1995 Gross	1 700 Nm
SAE J1349 Net, DIN 6271***	1 689 Nm
Displacement total	9,4 l

*) Meets Europe (EU) step 2.

**) Meets US (EPA) step 2, California (CARB) step 2 and Europe (EU) step 2.

***) with fan at normal speed.

With fan operating at full speed, the flywheel power is 210 kW (285 hp) and maximum torque is 1 589 Nm which corresponds to DIN 70020.

Electrical system

All cables, sockets and pins are identified. Cables are enclosed in plastic conduit and secured to main frame.

Halogen lights. Prewired for options.

Connectors meet IP67 standard for waterproofing as necessary.

Voltage	24 V
Battery capacity	2x170 Ah
Alternator	2,24 kW (80 A)
Starter motor	7 kW (9,4 hp)



Drivetrain

Volvo components, specifically designed for hauler applications.

Torque converter: Single-stage with free-wheeling stator and automatic lock-up on all gears.

Transmission: Fully automatic planetary transmission with six forward gears and two reverse gears, with a built-in variable hydraulic retarder.

Dropbox: Volvo design, single-stage.

Axles: Volvo design with fully floating axle shafts and planetary type hub reductions.

Differential locks: One longitudinal and two transverse with 100% lock-up function, operator selectable on the move.

Configuration: 4-wheel drive.

Torque converter.....	2,37:1
Transmission.....	Volvo PT 1562
Dropbox.....	IL 1
Axles.....	Volvo AH 64 / AH 71 E

Speed:

Forward	
1	8 km/h
2	12 km/h
3	22 km/h
4	31 km/h
5	40 km/h
6	53 km/h
Reverse	
1	8 km/h
2	13 km/h

Brake system

Dual circuit system with air-hydraulic disc brakes. Meets ISO 3450 and SAE J1473 at total machine weight.

Service brakes: Dry discs on all wheels.

Circuit division: One circuit for front axle and one for rear axle.

Parking brake: Spring-applied disc brake on the propeller shaft, designed to hold a loaded machine on a grade up to 18%. When the parking brake is applied, the longitudinal differential is locked.

Compressor: Gear-driven by engine transmission.

Retarder: Hydraulic, infinitely variable, integrated in transmission. Total retarding capability including transmission retarder and exhaust retarder, see graph.

Steering system

Hydromechanical self-compensating articulated steering for safe and accurate high-speed hauling. Fast acting, low effort steering with 3,4 turns lock-to-lock for slow speed maneuverability.

Cylinders: Two double-acting steering cylinders.

Secondary steering: Meets ISO 5010 at total machine weight.

Steering angle: ±45°

Suspension

Volvo's unique maintenance-free 3-point suspension system. The front axle is suspended at three points, which results in independent movement needed in rough terrain.

Front axle: One hollow rubber spring on each side. A cross stay provides the stability. Two shock absorbers on each side.

Rear axle: No suspension

Cab



Volvo cab, ergonomically designed for high operator comfort and excellent visibility. Wide threshold-free door opening and ergonomic cab entrance. Insulating rubber pads to reduce vibrations. Tilt/ telescopic steering wheel. Overhead console for radio and storage. Dash-mounted Operator's Communication System. Storage bins.

Standard: ROPS/FOPS tested and approved. (ISO 3471, SAE J1040) / (ISO 3449, SAE J231) standards.

Heater and defroster: Filtered fresh air, four-speed fan and pressurized cab to maintain a clean operating environment. Multi-level air outlets and separate defroster vents for all windows.

Operator's seat: Adjustable operator's seat with flameproof upholstery. Retractable seat belt.

Sound level in cab, ISO 6396 74 dB (A)

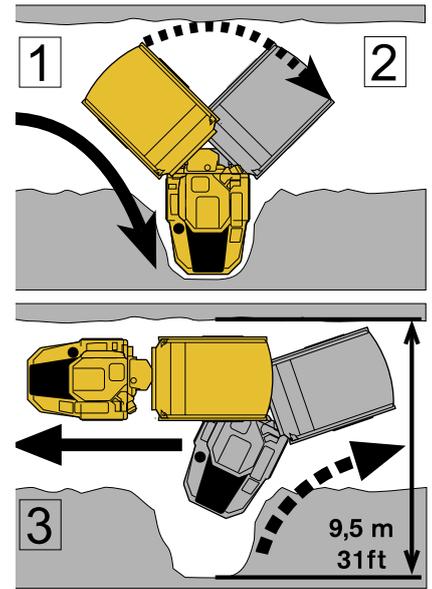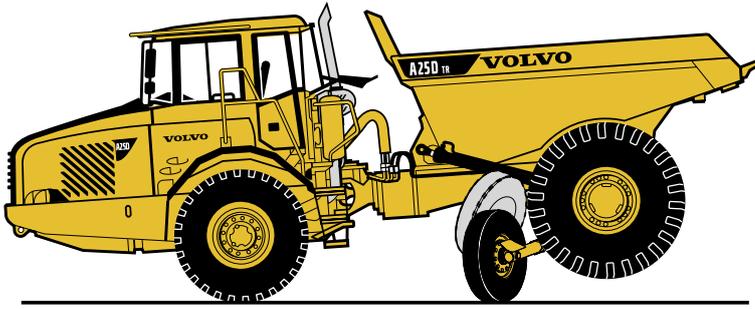

A25D 4x4 Turn-Around (Optional)

Turn-around system. Turns 180° in 25 seconds. A width of only 9.5 m (31 ft) is needed to turn the machine 180° in a 3-step operation. The turn-around system is hydraulically operated from the operator's seat and raises the unloaded trailer unit, thus enabling the steering hydraulics to swing the trailer through 90°.

1. Drive up to the turning point, steer the tractor unit fully to one side and engage the brakes.
2. Raise the trailer unit and steer the maximum 90°.
3. Lower the trailer and reverse away from the turning point.

Weights		Ground Pressure		Load Capacity	
Operating weight includes all fluids and operator and tires		At 15% sinkage of unloaded radius and specified weights.		Body volume according to SAE 2:1	
Tires	Front: 23,5R25, Rear: 29,5R25	Front: 23,5R25, Rear: 29,5R25			
Operating weight unloaded		Unloaded		Load capacity	
Front	12 400 kg	Front	125 kPa		24 000 kg
Rear	7 070 kg	Rear	49 kPa	Body, struck	9,5 m ³
Total	19 470 kg	Loaded		Body, heaped	13,0 m ³
Payload	24 000 kg	Front	159 kPa		
Total weight		Rear	194 kPa		
Front	15 650 kg				
Rear	27 820 kg				
Total	43 470 kg				

Hydraulic system

Load-sensing, variable displacement, piston pumps, consume power only when needed.

Pumps: Four engine-driven variable displacement load-sensing piston pumps driven by the flywheel PTO. One ground-dependent piston pump for secondary steering mounted on the dropbox.

Filter: One fibreglass filter with magnetic core.

Pump capacity per pump:

Engine-dependent 140 l/min
 Ground-dependent 142 l/min
 at shaft speed 52,5 r/s (3 150 r/min)
 Working pressure 25 MPa

Body

Load and dump brake: With the engine running, the service brakes on the rear axle are applied and transmission is shifted to neutral.

Body material: Hardened and tempered steel body, flat plate design made of high-strength steel.

Front 10 mm
 Sides 10 mm
 Bottom 16 mm
 Yield strength 1 000 N/mm²
 Tensile strength 1 250 N/mm²
 Hardness 400 HB




Dump Cylinders: Two single-stage double-acting cylinders.

Tipping angle 59°
 Tipping time with load 7 s
 Lowering time 7 s

Specifications

Pos	Metric	Imp.
A	8 939 mm	29'4"
A ₁	4 954 mm	16'3"
A ₂	4 558 mm	14'11"
B	4 219 mm	13'10"
C	3 470 mm	11'5"
C ₁	3 332 mm	10'11"
C ₂	1 768 mm	5'10"
D	2 766 mm	9'1"
E	1 210 mm	4'0"
F	4 254 mm	13'11"
H	1 919 mm	6'4"
I	495 mm	1'7"
J	2 794 mm	9'2"
K	2 416 mm	7'11"
L	773 mm	2'6"
M	5 176 mm	17'0"
N	7 092 mm	23'3"
N ₁	3 197 mm	10'6"
O	3 130 mm	10'3"
P	2 930 mm	9'7"
R	637 mm	2'1"
R ₁	664 mm	2'2"
U	3 317 mm	10'11"
V	2 374 mm	7'9"
W	3 117 mm	10'3"
X	461 mm	1'6"
X ₁	585 mm	1'11"
X ₂	886 mm	2'11"
Y	2 258 mm	7'5"
Z	2 859 mm	9'5"
a ₁	23.1°	
a ₂	59°	
a ₃	45°	

Unloaded machine with 23,5R25 / 29,5R25 tires)

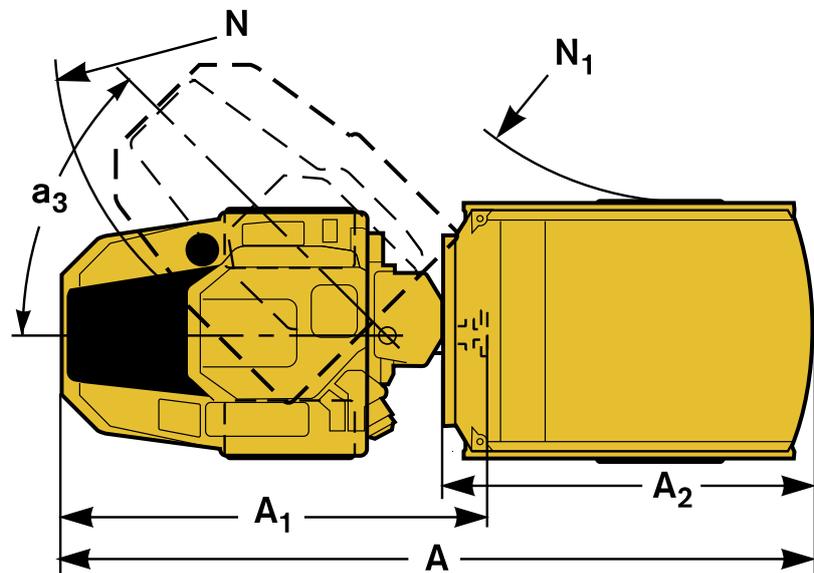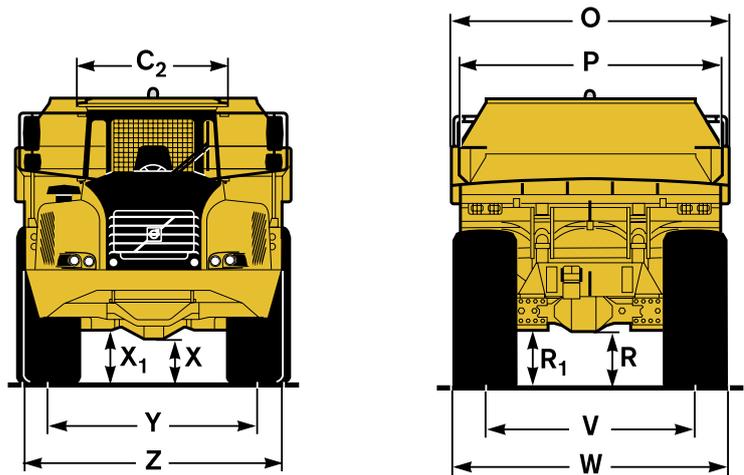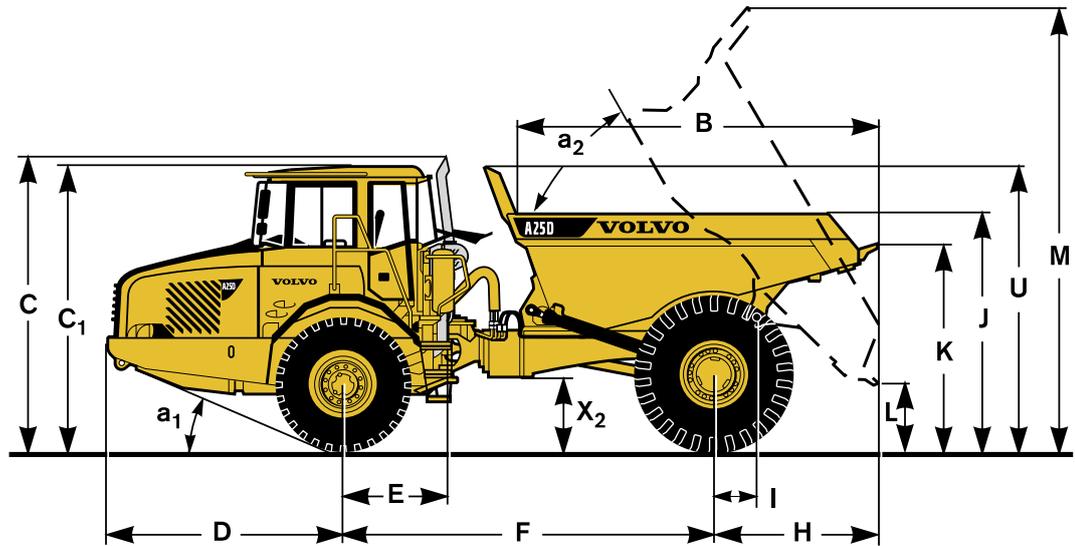

STANDARD EQUIPMENT

Safety

ROPS/ FOPS protected cab
Service platform for ease of service
Anti-slip material on hood and fenders
Hazard lights
Horn
Protective grille for rear window
Rear -view mirrors
Retractable 3-inch safety belt
Secondary steering
Steering joint locking assembly
Dump body lock
Windshield wipers with interval function
Windshield washers

Comfort

Tilt/telescopic steering wheel
Cab heater with filtered fresh air and defroster
Overhead console for radio
Sun visor
Tinted glass
Can holder /storage tray
Cigarette lighter
Ashtray
Space for lunch cooler
Storage box

Engine

Direct injected, electronically controlled
Turbocharged, intercooled
Remote oil drain plug
Remote oil filters, for ease of access
Preheater for easier cold starts

Electrical system

55 A alternator
Battery disconnect switch
Extra 24 V socket for lunch cooler
Lights:

- Headlights
- Parking lights
- Direction indicators
- Rear lights
- Back-up
- Brake lights
- Cab lighting
- Instrument lighting

Operator information interface

Gauges:

- Speedometer
- Tachometer
- Brake pressure
- Fuel
- Transmission oil temperature

Pilot lights for all switches
Warning lights grouped and easy to read
Central warning (3 levels) for all vital functions
Central positioned information display:

- Automatic pre-start checks
- Operation information, easy-to-find menu
- Troubleshooting diagnostics
- Hour meter
- Clock
- Machine settings

Drivetrain

Automatic transmission
Torque converter with automatic lock-up
Dropbox, single-stage
Hydraulic variable retarder
100% longitudinal differential lock
100% differential locks in all axles

Brakes

Air-hydraulic disc brakes
Two circuit brake system
Parking brake on prop shaft

Body

Body prepared for exhaust heating
Load and Dump brake

Tires

Front: 23,5R25, Rear: 29,5R25

Other

Air drier

OPTIONAL EQUIPMENT

(Standard on certain markets)

Safety

Fire-extinguisher and first aid kit

Service and maintenance

Tool kit with tire inflation unit
Electrical hood opening

Engine

Extra air cleaner, heavy-duty
Electric engine heater (120V or 240V)
External emergency engine stop
Delayed engine stop

Electrical

Work lights, roof-mounted
Work lights, rear-facing, fender-mounted
Rotating beacon, collapsible mount
Back-up alarm
Rear vision system
Anti-theft system (prevents engine start)
Headlights for left-hand traffic
Alternator, heavy-duty 80 A

Cab

Air suspended, electrically heated operator's seat
Instructor's seat with seat belt
Electrically heated rear-view mirrors
Air conditioning
Radio installation kit
Radio
Cable kit for cab heater (120V or 240V)
Window tint film

Body

Body exhaust heating kit
Wear plates

External

Wheel block
Additional front bumper (rubber)

Other

Turn-around system, a width of only 9.5 m (31 ft) is needed to turn the machine
Synthetic hydraulic oil (biologically degradable)
Arctic oil kit
Toolbox
Towing Hitch



Technology on Human Terms

Volvo Construction Equipment is one of the world's leading manufacturers of construction machines, with a product range encompassing wheel loaders, excavators, articulated haulers, motor graders and more.

The tasks they face vary considerably, but they all share one vital feature: technology which helps man to perform better: safely, efficiently and with care of the environment. We refer to it as Technology on Human Terms.

The sheer width of the product range means it is always possible to choose exactly the right machine and attachment for the job. Each machine also comes with the quality, continuity and security which is represented by the

Volvo name. The strength of the service and parts organizations; the security of always having immediate access to leading-edge research and technical development are part of the Volvo name. A machine from Volvo meets the very highest demands in all kinds of jobs, under all conditions, the world over.

Volvo Construction Equipment develops, manufactures and markets construction equipment. We are a Volvo company with production facilities on four continents and a market presence in over 100 countries.

For more information please visit our website: www.volvo.com

All products are not available in all markets. Under our policy of continuous improvement, we reserve the right to change specifications and designs without prior notice. The illustrations do not necessarily show the standard version of the machine.

VOLVO

Construction Equipment

Ref No. 21 2 669 2683 English
Printed in Sweden 2004.02-4,0 GMC
Volvo, Eskilstuna