

**VOLVO T450D SCRAPER HAULER ATTACHMENTS**

# **ASHLAND I-180TS2**



**MORE CARE. BUILT IN.**



# ASHLAND I-180TS2 EJECTION STYLE SCRAPER

The I-180TS2 is designed for professional contractors who handle sandy loam to heavy black dirt or anything in between and require the highest production/lowest down time construction grade ejection scraper. The 56" apron opening eliminates the need for double or triple ejecting in heavy soils, making unloading quick and easy while maximizing production. Building on 54 years of manufacturing experience Ashland designed the I-180TS2 to meet the high demands of today's professional contractor.

## **Need to double your production?**

Safe and easy tandem or triple hookup with heavy duty rear hitch.

## **Put your material where you want it!**

The 56" apron opening, eliminates the need for double or triple ejecting in heavy soils making it a fast, easy unloading scraper that will maximize production.

## **Reduce downtime!**

The rugged and simple design includes trunion-style lift cylinders and large trailing arms, creating less stress while operating or being pushed by a dozer.

## **Bigger is better!**

With fast blade reaction you can maintain higher RPM's and get bigger loads faster.

## **The Ashland Advantage**

When you buy an Ashland Scraper you are buying quality. Not just quality design and manufacturing, but quality service. At Volvo and Ashland, we realize that time is money. Together with our authorized dealers we know what it takes to keep your project moving in the right direction. From preventative maintenance to replacement parts we are available to help. If you have any service concerns, please contact your Volvo dealer.






# MOVE MORE FOR LESS




## Specifications

	English	Metric
Capacity Heaped	18 cu yd	13.8 cu m
Capacity Struck	14.5 cu yd	11.1 cu m
Width of Cut	126 in	320 cm
Apron Clearance	56 in	142 cm
Depth of Cut	8 in	20.3 cm
Depth of Spread	0-18 in	0-46 cm
Pushoff Cylinder (2) std.	4 in x 60 in	10 cm x 152.4 cm
Apron Cylinder (2) std.	5 in x 13 in Trunion	12.7 cm x 33 cm
Lift Cylinders (2) std.	5.5 in x 20 in Trunion	14 cm x 50.8 cm
Tire Size, Rear	29.5 x 25 28-ply OTR	
Weight Standard	24,720 lbs	11,213 kg
Max. Gross Vehicle Weight	80,000 lbs	36,290 kg

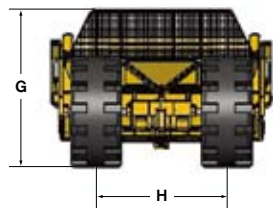

## Dimensions

	English	Metric
A	142.125 in	361 cm
B	117.3 in	298 cm
C	20 in	50 cm
D	18 in	45 cm
E	17 in	43 cm
F	22 in	55 cm
G	101 in	257 cm
H	84.25 in	214 cm
J	368.5 in	963 cm

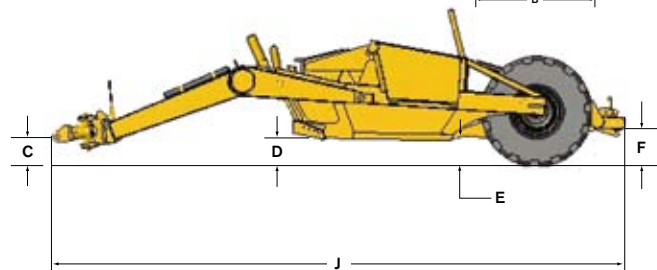

### Options:

- Serrated Center Blade
- Hydraulic Package and Three Scraper Train.



Volvo Construction Equipment is different. The company's products are designed, built and supported in a different way. That difference comes from our 170-year engineering heritage. A heritage of thinking first about the people who actually use the machines. About how to make them safer, more comfortable, more productive. About the environment we all share. The result of that thinking is a growing range of machines and a global support network dedicated to helping you do more. People around the world are proud to use Volvo. And we're proud of what makes Volvo different - **More care. Built in.**



*Not all products are available in all markets. Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine.*

# **VOLVO**

**Volvo Construction Equipment**  
[www.volvoce.com/na](http://www.volvoce.com/na)

Ref. No. 22 1 000 9015  
Printed in USA 11/07 - 1,5  
Volvo, Asheville

English  
USA