



Engine (Diesel)	Make Model Output Coolant Fuel tank capacity Exhaust emission	HP gal.	Deutz BF4M 1013 C 152 @ 2300 rpm Liquid 60.7 COM II
Paving	Output (theor.) ¹ Mat thickness (max.)	t/h in	500 11.81
Speeds	Paving Transport	ft/min mph	131.2 12.4
Propulsion	drive units rear drive units front		2 2
Rear wheels Front steering wheels	2 pneumatic tyres 2 elastic tyres	Ø / width Ø / width	53.53 in / 15.35 in 22.83 in / 13.38 in
Mix Conveyor System	Hopper capacity Conveyors Conveyors Speed Augers Auger speed Auger diameter	t ft/min rpm in	12 2 68.2 2 80 14.17
Paving Width	min. max.	ft ft	8.2 24.6
Electrics			24 Volt System
Transport Dimensions	Width Length Height	in in in	98.40 239.78 118.08 (cabin 124.77)
Weight²	Tractor	lb.	27,342


¹ the actual paving output depends upon the mat thickness, paving width and paving speed and will vary according to the paving conditions prevailing on your job-site. Please approach us and we will be pleased to assist you in calculating the paving output for your particular paving project.

² all weights are approx. weights without options.

Paving Screeds

Screed Model	Paving Width Adjustment	Basic Width and Adjusting Range (ft)	Operating Weight ² (lb)	max. Paving Width (ft)	Operating Weight ² (lb)
VB 78	hydraulic	8.20 – 16.41	7,673	24.61	12,282

² all weights are approx. weights without options.

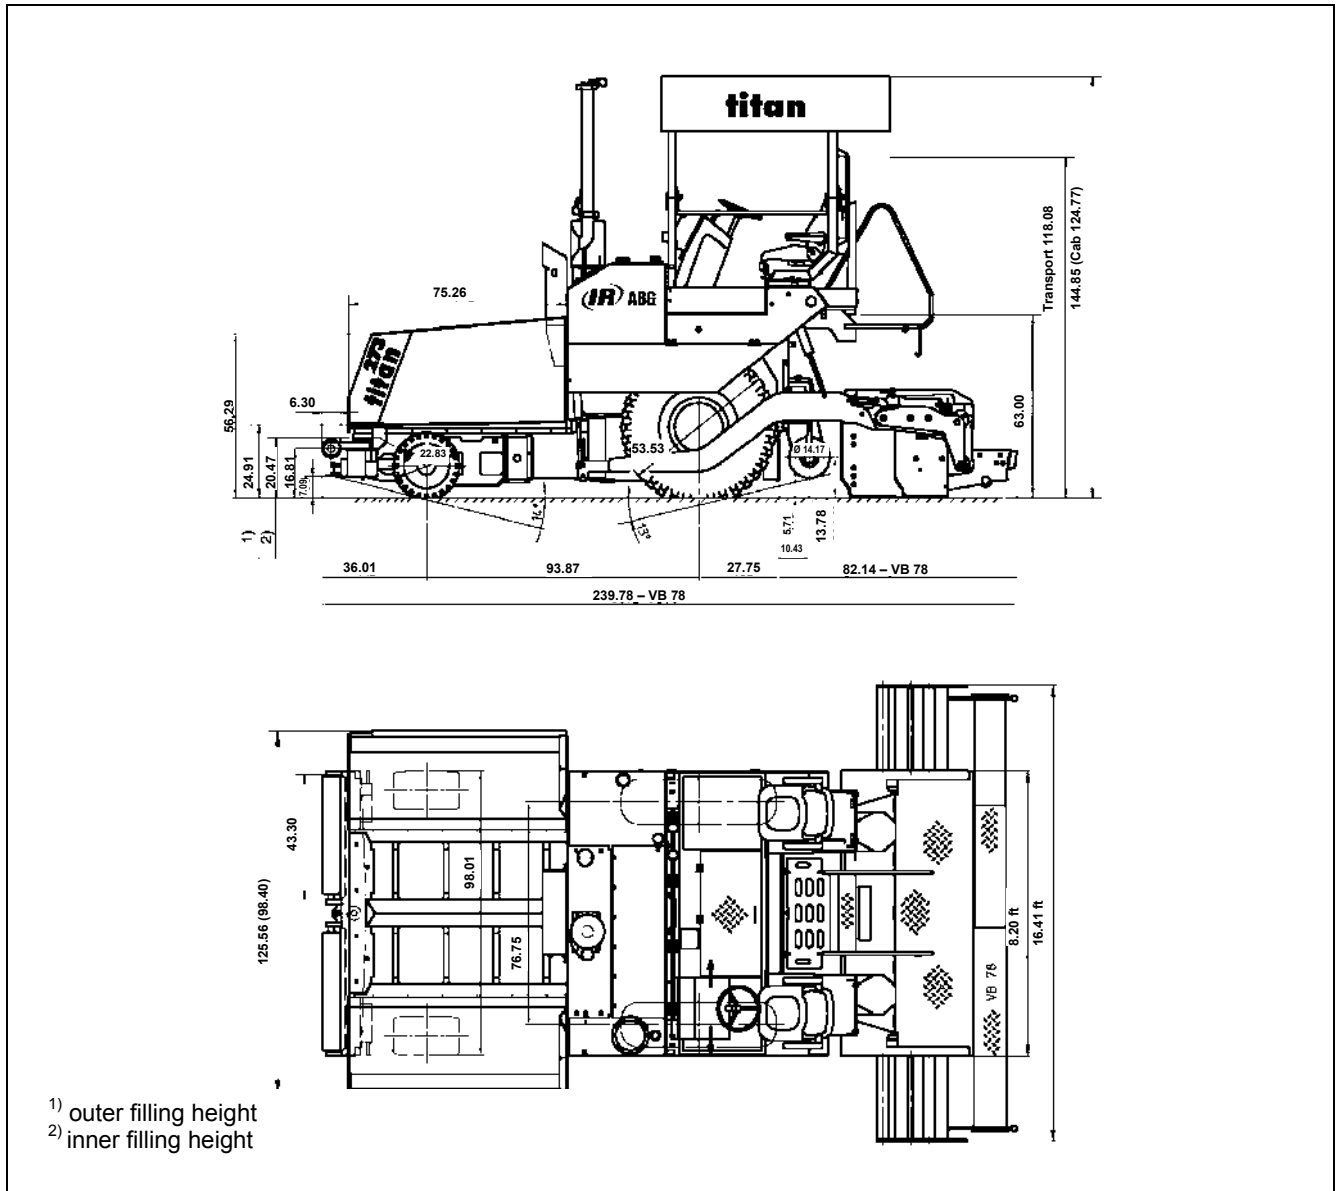

Allgemeine Baumaschinen-Gesellschaft mbH
 Kuhbrückenstraße 18 · D-31785 Hameln
 Tel. +49 (0) 5151/ 209 0 · Fax +49 (0) 5151/ 209 0
www.ir-abg.com