



Engine (Diesel)	Make Model Output Coolant Fuel tank capacity Exhaust emission	kW/HP I	Cummins 4 BT 4.5 – C99 74 / 99 @ 2200 1/min Liquid 108 COM II / EPA II
Paving	Output (theor.) ¹ Mat thickness (max.)	t/h mm	350 300
Speeds	Paving Transport	m/min km/h	18 18
Propulsion	drive units rear drive units front		2 4
Rear wheels Front steering wheels	2 pneumatic tyres 4 elastic tyres	Ø / width Ø / width	1360 mm / 390 mm 580 mm / 340 mm
Mix Conveyor System	Hopper capacity Conveyors Conveyors Speed Augers Auger speed Auger diameter	t m/min 1/min mm	12 2 24 2 80 360
Paving Width	min. max.	m m	2.00 5.00
Electrics			24 V Bordnetz
Transportmaße	Width Length Height	mm mm mm	2090 6222 2990
Weight²	Tractor	kg	10500


¹ the actual paving output depends upon the mat thickness, paving width and paving speed and will vary according to the paving conditions prevailing on your job-site. Please approach us and we will be pleased to assist you in calculating the paving output for your particular paving project.

² all weights are approx. weights without options.

Paving Screeds

Screed Model	Paving Width Adjustment	Basic Width and Adjusting Range (m)	Operating Weight ³ (kg)	max. Paving Width (m)	Operating Weight ³ (kg)
VB 50 GST	hydraulic	2.00 – 4.00	2400	5.00	2600

³ all weights are approx. weights without options..

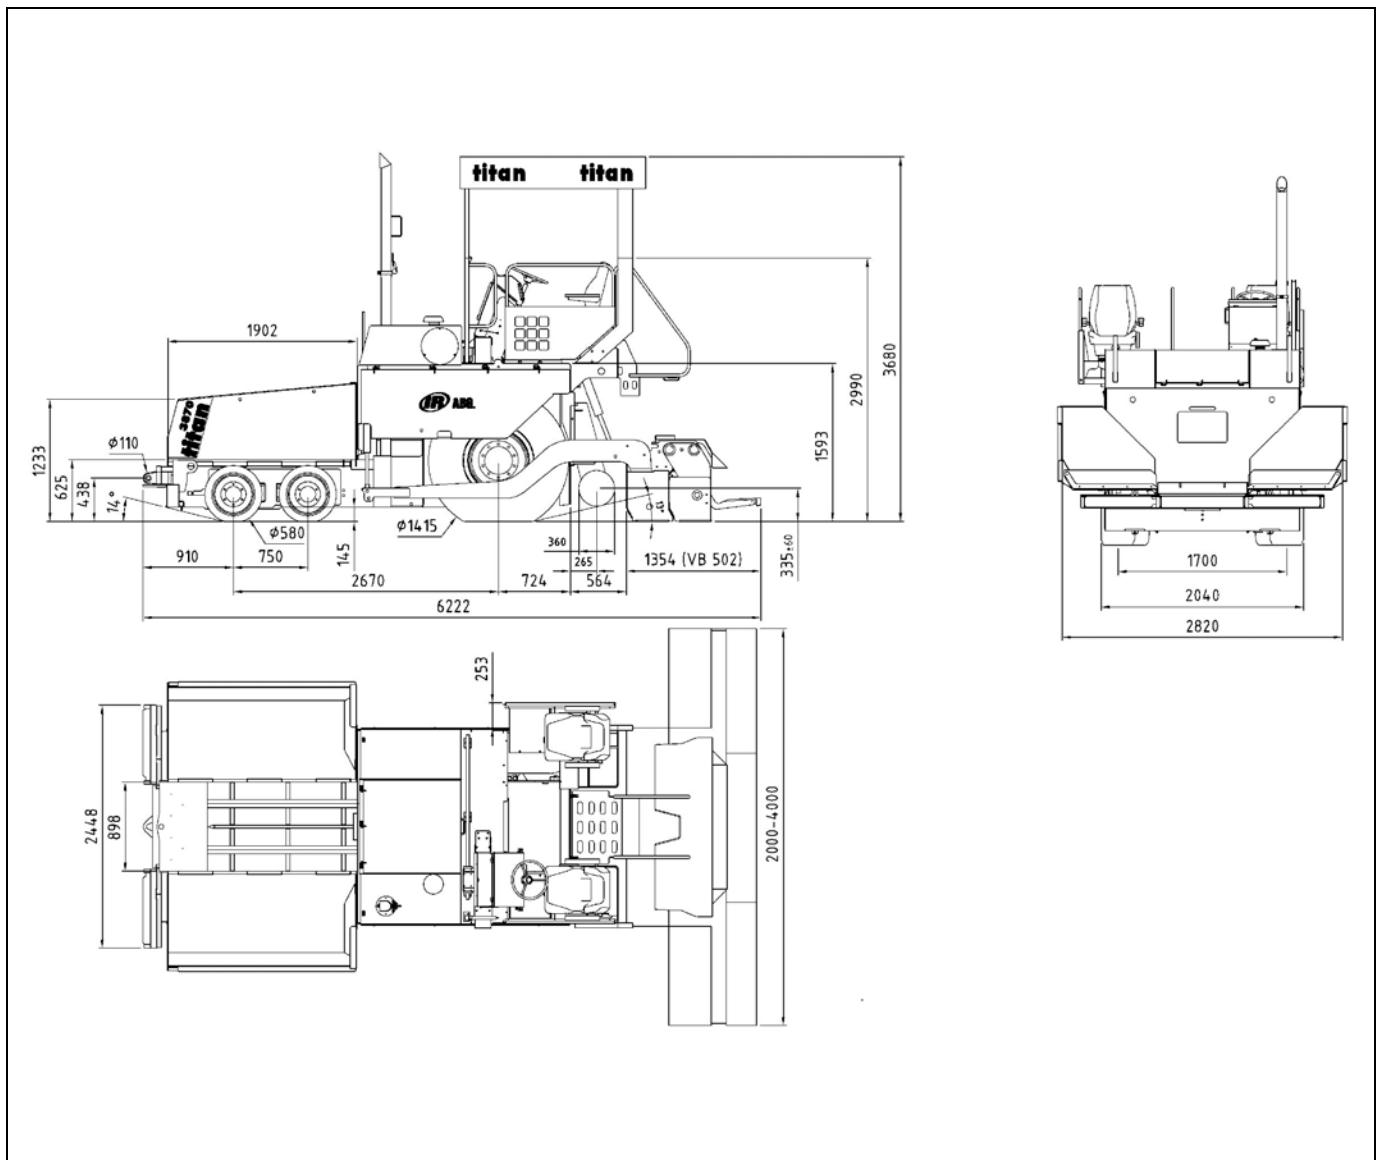

Allgemeine Baumaschinen-Gesellschaft mbH
 Kuhbrückenstraße 18 · D-31785 Hameln
 Tel. +49 (0) 5151/ 209 0 · Fax +49 (0) 5151/ 209 0
www.ir-abg.com