


V O L V O



Volvo Excavators

EC350E HYBRID

Volvo Construction Equipment

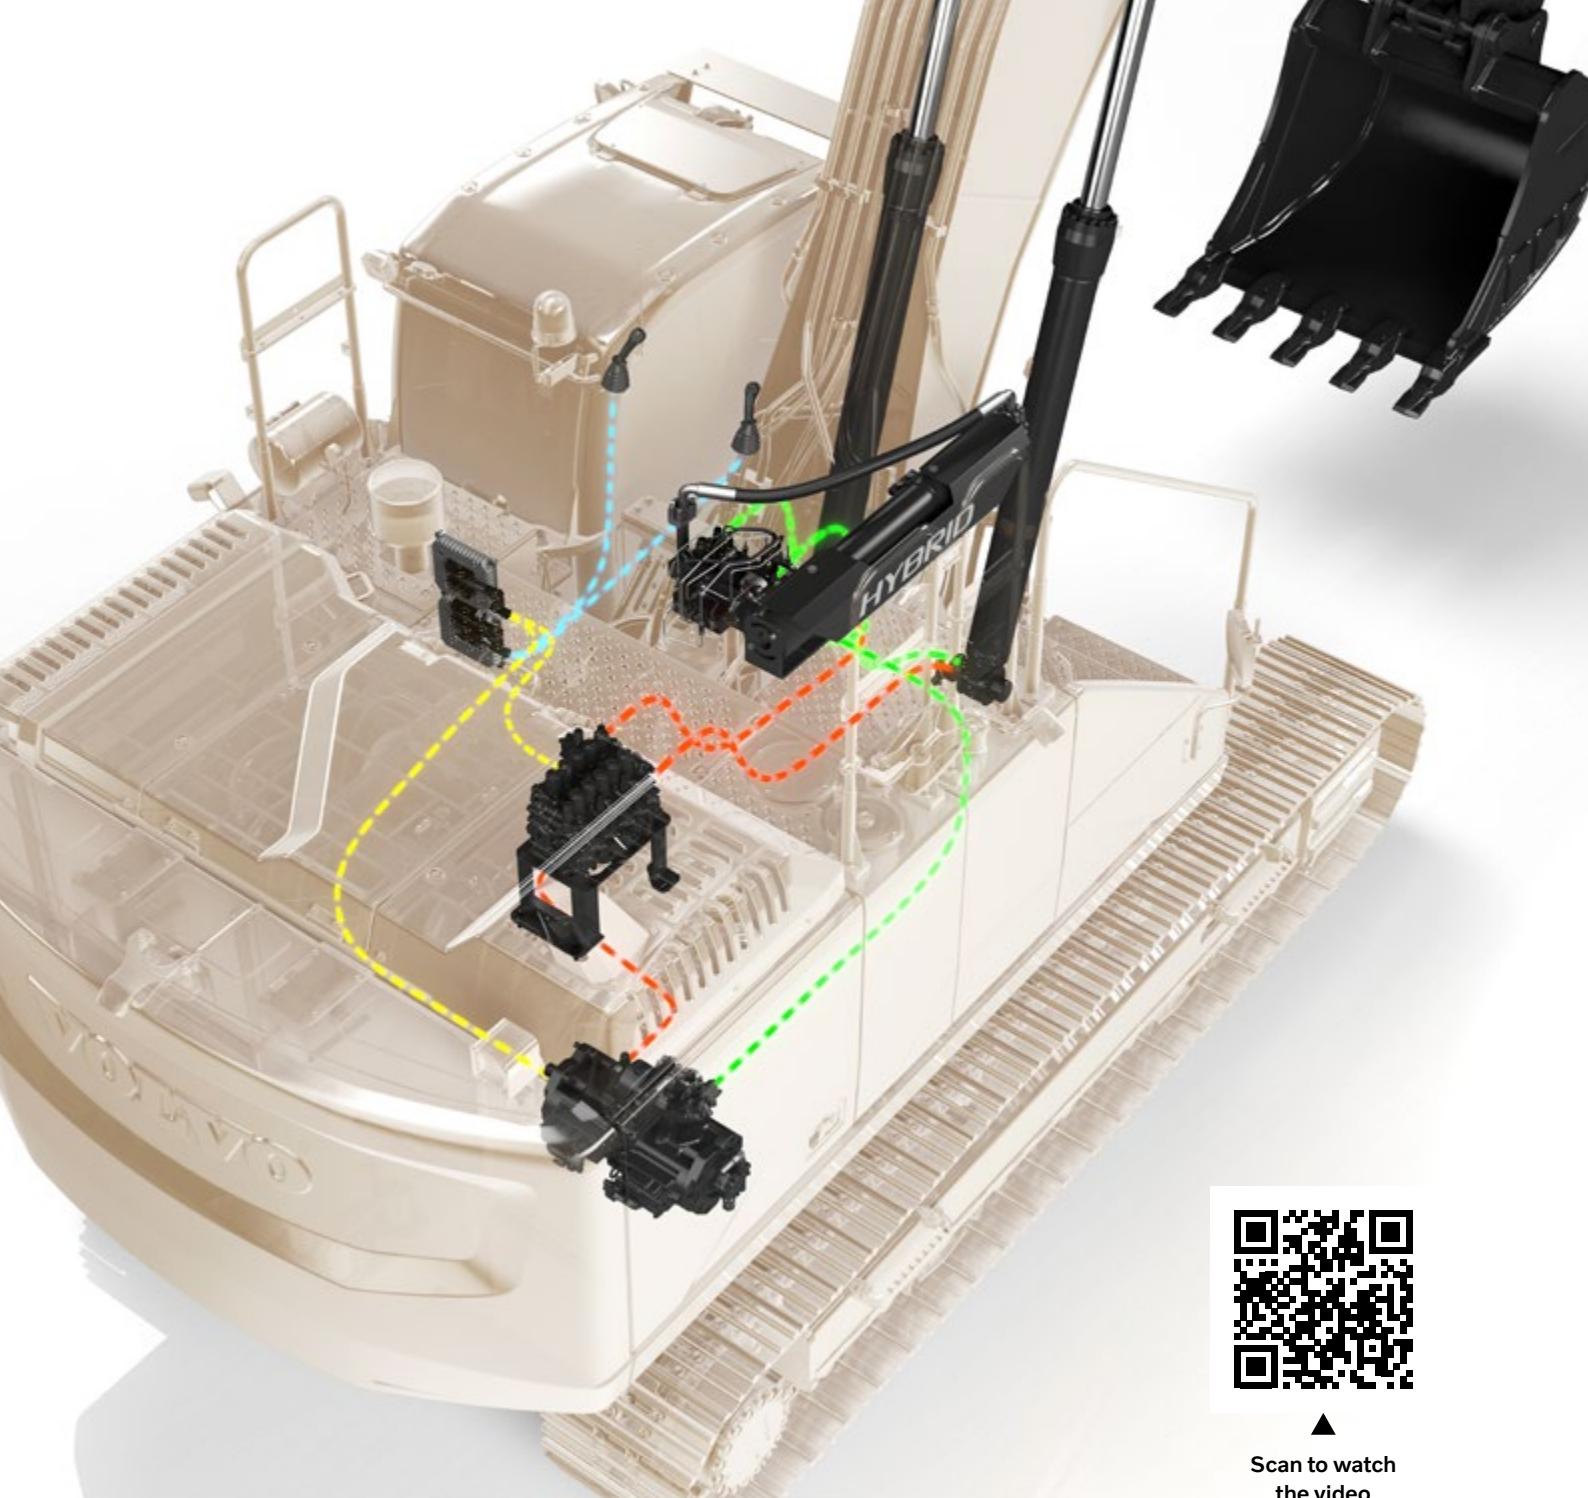

Scan to watch
the video

Simple solution, big savings

Introducing the new EC350E Hybrid. Featuring unique hydraulic hybrid Volvo technology, the excavator utilizes the boom down motion to charge the accumulator, with the stored energy used to drive the assist motor, which powers the engine system.

The result is up to 17%* increase in fuel efficiency while delivering all the power and performance you would expect from a conventional EC350E.

*Efficiency and savings may vary based on operator, application and conditions.



17%
greater fuel
efficiency*



15%
lower fuel
consumption*



15%
reduction in CO₂
emissions*



100%
Volvo engineered
hydraulic hybrid



Simply reliable

The uncomplicated and reliable hybrid solution is easy to maintain and consists of just a handful of add-on components, meaning no disruption or complication to how the high performing EC350E is engineered.

Cleaner and greener

The EC350E Hybrid reduces CO₂ emissions by up to 15%* making it a more environmentally respectful choice, especially when working in built-up areas.

Rapid payback

When working in dig and dump applications, the EC350E Hybrid is a straightforward solution with fast payback. Save fuel, lower emissions and boost the profitability of your operation.

EC350E Hybrid in detail

Engine

The next-generation Volvo diesel engine uses Volvo Advanced Combustion Technology (V-ACT) to deliver lower emissions, superior performance and fuel efficiency. The engine uses precise, high-pressure fuel injectors, turbo charger and intercooler, and electronic engine controls to optimize machine performance.

Engine	Volvo	D8M
Max power at	r/min	1600
Net, ISO 9249/SAE J1349	kW	219
	hp	298
Gross, ISO 14396/SAE J1995	kW	220
	hp	299
Max torque	Nm	1400
at engine speed	r/min	1400
No. of cylinders		6
Displacement	l	7.7
Bore	mm	110
Stroke	mm	135

Hybrid

The uncomplicated and reliable hybrid solution, Volvo's novel hydraulic hybrid harvests 'free' energy generated by the down motion of the excavator's boom and uses it to supercharge the engine system. The powerful and regular boom-down motions charge the 26 litre hydraulic accumulator (6.9 gallon), which then delivers energy to drive the hydraulic assist motor that helps to power the engine system. There are the same levels of controllability and performance as the standard EC350E, including the ability to work in ECO mode and Hybrid mode simultaneously.

Accumulator

No. of accumulator		1
Displacement	l	26

Electrical System

High-capacity electrical system that is well protected. Waterproof double-lock harness plugs are used to secure corrosion-free connections. The main relays and solenoid valves are shielded to prevent damage. The master switch is standard.

Voltage	V	24
Batteries	V	2 x 12
Battery capacity	Ah	170
Alternator	V/A	28/120
Start motor	V - kW	24 - 5.5

Undercarriage

The undercarriage has a robust X-shaped frame. Greased and sealed track chains are standard.

Track shoes		2 x 48
Link pitch	mm	215.9
Shoe width, triple grouser	mm	600 / 700 / 800 / 900
Shoe width, triple grouser (HD)	mm	600
Shoe width, double grouser	mm	600
Bottom rollers		2 x 8
Top rollers		2 x 2

Cab

The operator's cab has easy access via a wide door opening. The cab is supported on hydraulic dampening mounts to reduce shock and vibration levels. These along with sound absorbing lining provide low noise levels. The cab has excellent all-round visibility. The front windshield can easily slide up into the ceiling, and the lower front glass can be removed and stored in the side door.

Integrated air-conditioning and heating system: The pressurized and filtered cab air is supplied by an automatically-controlled fan. The air is distributed throughout the cab from 14 vents.

Ergonomic operator's seat: The adjustable seat and joystick console move independently to accommodate the operator. The seat has nine different adjustments plus a seat belt for the operator's comfort and safety. Refrigerant of the type R134a is used when this machine is equipped with air conditioning. Contains fluorinated greenhouse gas R134a, Global Warming Potential 1.430 t CO₂-eq.

Swing system

The swing system uses an axial piston motors, driving a planetary gearbox for maximum torque. An automatic holding brake and anti-rebound valve are standard.

Max. slew speed	r/min	10.3
Max. slew torque	kNm	126.2

Travel System

Each track is powered by an automatic two-speed shift travel motor. The track brakes are multi-disc, spring-applied and hydraulic released. The travel motor, brake and planetary gears are well protected within the track frame.

Max. drawbar pull	kN	261
Max. travel speed (low)	km/h	3.3
Max. travel speed (high)	km/h	5.1
Gradeability	°	35

Sound Level

Sound pressure level in cab according to ISO 6396

L _{pA}	dB	71
External sound level according to ISO 6395 and EU Noise Directive 2000/14/EC		

L _{WA}	dB	105
-----------------	----	-----

Hydraulic system

The hydraulic system, also known as the "Automatic Sensing Work Mode," is designed for high-productivity, high-digging capacity, high-maneuvering precision and excellent fuel economy. The summation system, boom, arm and swing priority along with boom, arm and bucket regeneration provides optimum performance.

The following important functions are included in the system:

Summation system: Combines the flow of both hydraulic pumps to ensure quick cycle times and high productivity.

Boom priority: Gives priority to the boom operation for faster raising when loading or performing deep excavations.

Arm priority: Gives priority to the arm operation for faster cycle times in leveling and for increased bucket filling when digging.

Swing priority: Gives priority to swing functions for faster simultaneous operations.

Regeneration system: Prevents cavitation and provides flow to other movements during simultaneous operations for maximum productivity.

Power boost: All digging and lifting forces are increased.

Holding valves: Boom and arm holding valves prevent the digging equipment from creeping.

Main pump, Type 2 x Variable displacement axial piston pumps

Maximum flow	l/min	2 x 288
--------------	-------	---------

Pilot pump, Type Gear pump

Maximum flow	l/min	20
--------------	-------	----

Relief value setting pressure

Implement	MPa	33.3 / 36.3
Travel circuit	MPa	33.3
Slew circuit	MPa	27.9
Pilot circuit	MPa	3.9

Hydraulic Motors

Travel: Variable displacement axial piston motor with mechanical brake.

Slew: Fixed displacement piston motor with mechanical brake.



Hydraulic Cylinders

Mono boom		2
Bore x Stroke	Ø x mm	150 x 1530
Arm		1
Bore x Stroke	Ø x mm	170 x 1700
Bucket		1
Bore x Stroke	Ø x mm	140 x 1285

Service Refill

Fuel tank	l	580
DEF/AdBlue® tank	l	50
Hydraulic system, total	l	465
Hydraulic tank	l	215
Engine oil	l	30
Engine coolant	l	44
Slew reduction unit	l	6
Travel reduction unit	l	2 x 6.8


Specifications

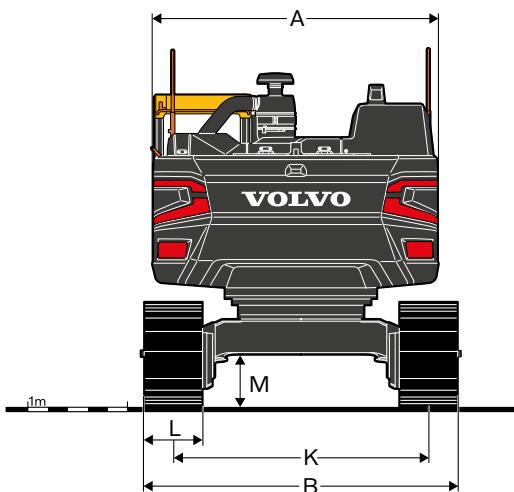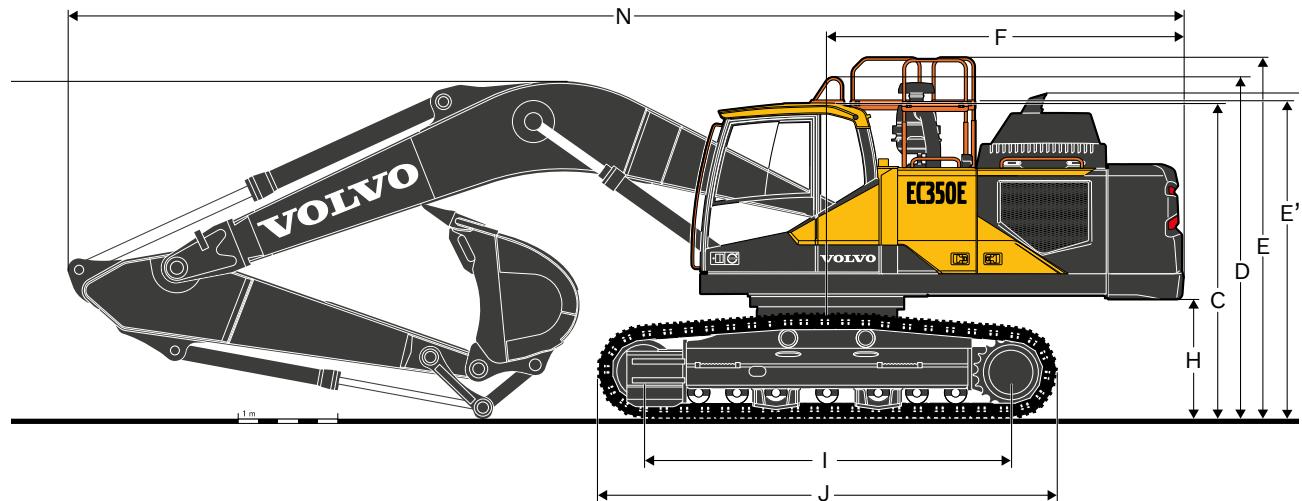

DIMENSIONS

Description	Unit	EC350EL Hybrid			EC350ENL Hybrid		
		2.6 HD	3.2 HD	3.9 GP	2.6 HD	3.2 GP	3.9 GP
A. Overall width of upper structure	mm	2 890	2 890	2 890	2 890	2 890	2 890
B. Overall width	mm	3 190	3 190	3 190	2 990	2 990	2 990
C. Overall height of cab	mm	3 175	3 175	3 175	3 175	3 175	3 175
D. Overall height of handrail (Unfolded)	mm	3 440	3 440	3 440	3 440	3 440	3 440
E. Overall height of guardrail (Unfolded)	mm	3 650	3 650	3 650	3 650	3 650	3 650
E'. Overall height of handrail&guardrail (Folded)	mm	3 165	3 165	3 165	3 165	3 165	3 165
F. Tail swing radius	mm	3 600	3 600	3 600	3 600	3 600	3 600
G. Overall height of diffuser	mm	3 265	3 265	3 265	3 265	3 265	3 265
H. Counterweight clearance *	mm	1 170	1 170	1 170	1 170	1 170	1 170
I. Tumbler length	mm	4 020	4 020	4 020	4 020	4 020	4 020
J. Track length	mm	4 945	4 945	4 945	4 945	4 945	4 945
K. Track gauge	mm	2 590	2 590	2 590	2 390	2 390	2 390
L. Shoe width	mm	600	600	600	600	600	600
M. Min. ground clearance *	mm	500	500	500	500	500	500
N. Overall length	mm	11 295	11 200	11 245	11 295	11 210	11 245
O. Overall height of boom	mm	3 565	3 380	3 575	3 565	3 380	3 575

* Without shoe grouser

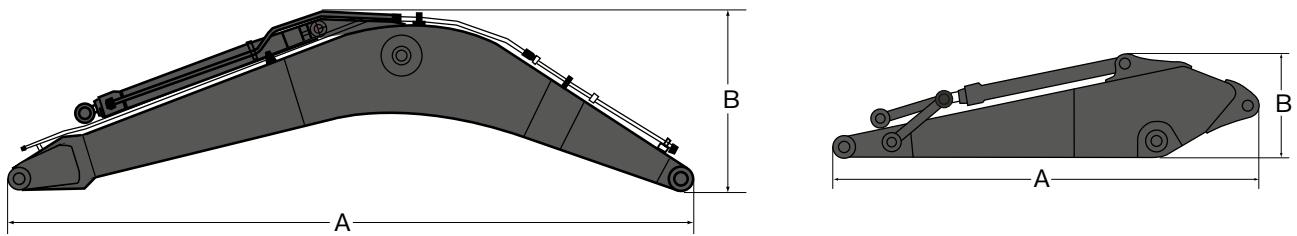

DIMENSIONS

Description		Unit		EC350E Hybrid		Description		Unit		EC350E Hybrid				
Boom	m	6.45 GP		6.45 HD		Arm	m	2.6 HD		3.2 GP		3.2 HD		3.9 GP
A. Length	mm	6 710		6 710		A. Length	mm	3 670		4 350		4 345		5 045
B. Height	mm	1 845		1 845		B. Height	mm	1 135		1 060		1 080		1 080
Width	mm	815		815		Width	mm	570		570		570		570
Weight	kg	3 205		3 490		Weight	kg	1 940		1 920		2 020		2 140

* Includes cylinder, piping and pin, excludes boom cyl. Pin

* Includes cylinder, linkage and pin

Specifications


WORKING RANGES

Description	Unit	EC350E Hybrid		
Boom	m	6.45		
Arm	m	2.6	3.2	3.9
A. Max. digging reach	mm	10 600	11 120	11 760
B. Max. digging reach on ground	mm	10 380	10 910	11 560
C. Max. digging depth	mm	6 890	7 490	8 190
D. Max.digging depth (2.44 m level)	mm	6 690	7 310	8 040
E. Max. vertical wall digging depth	mm	10 170	10 330	10 600
F. Max. cutting height	mm	7 050	7 240	7 510
G. Max. dumping height	mm	4 790	5 220	5 800
H. Min. front swing radius	mm	4 320	4 290	4 240

DIGGING FORCES WITH DIRECT FIT BUCKET

Bucket radius	mm	1 746	1 746	1 746
Breakout force	Normal	SAE J1179	kN	176
	Power boost		kN	192
	Normal	ISO 6015	kN	201
	Power boost		kN	218
Tearout force	Normal	SAE J1179	kN	187
	Power boost		kN	203
	Normal	ISO 6015	kN	192
	Power boost		kN	209
Rotation angle, bucket	°			178

MACHINE WITH MONO BOOM

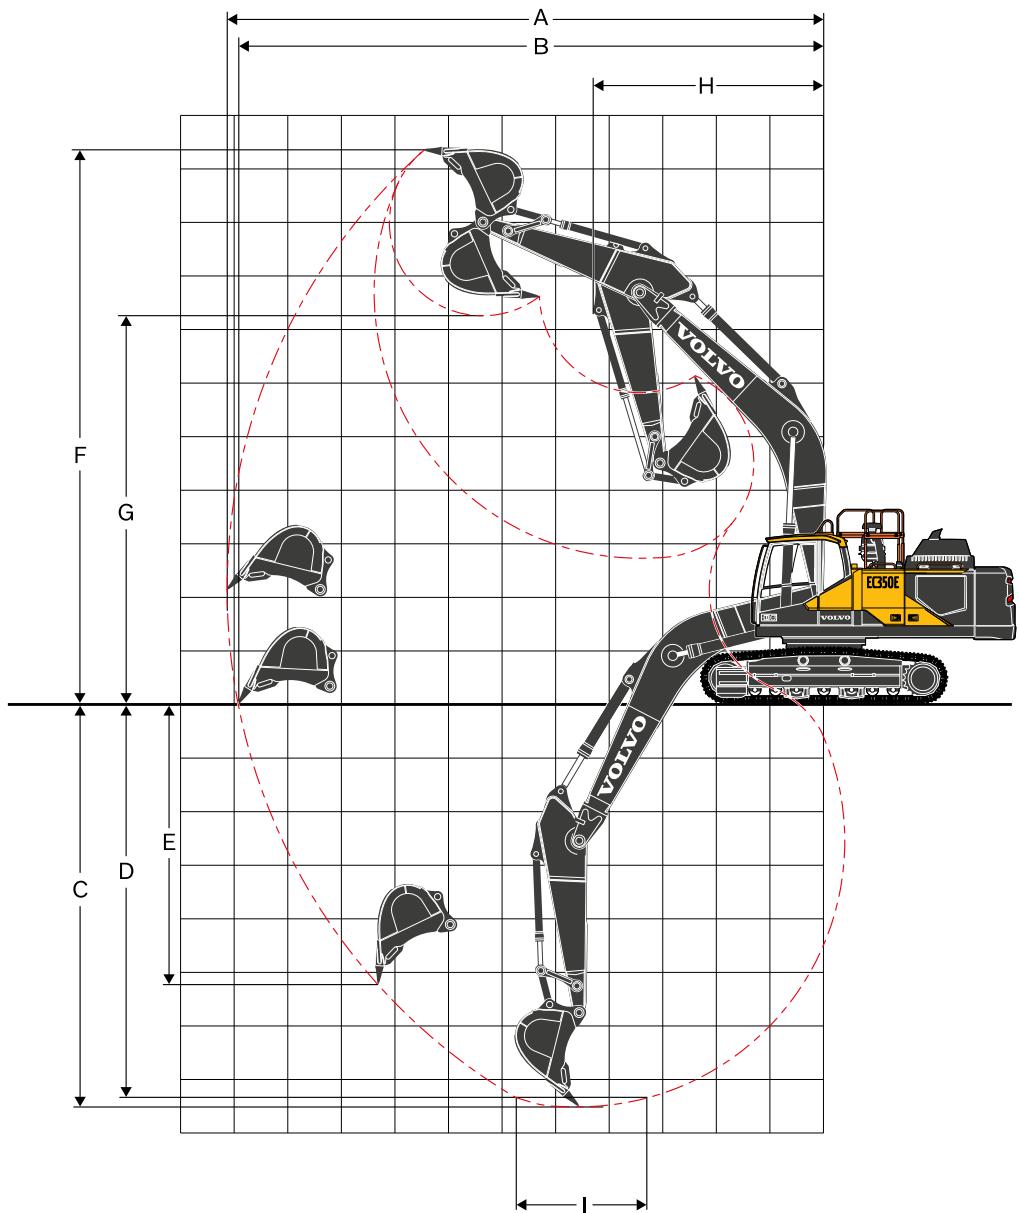

Specifications

GROUND PRESSURE

Description	Shoe width	Operating weight	Ground pressure	Overall width	Operating weight	Ground pressure	Overall width	Operating weight	Ground pressure	Overall width
	mm	kg	kPa	mm	kg	kPa	mm	kg	kPa	mm
EC350EL Hybrid										
		6.45 m boom (HD), 2.6 m arm (HD), 1730 kg bucket, 7 000 kg counterweight			6.45 m boom (HD), 3.2 m arm (HD), 1730 kg bucket, 7 000 kg counterweight			6.45 m boom (HD), 3.9 m arm (GP), 1730 kg bucket, 7 000 kg counterweight		
Triple grouser	600	36 740	70.5	3 190	36 820	70.6	3 190	36 890	70.8	3 190
	600 (HD)	36 780	70.6	3 190	36 860	70.7	3 190	36 930	70.8	3 190
	700	37 360	61.4	3 290	37 450	61.6	3 290	37 510	61.7	3 290
	800	37 760	54.3	3 390	37 840	54.4	3 390	37 910	54.5	3 390
	900	38 150	48.8	3 490	38 230	48.9	3 490	38 290	49.0	3 490
Double grouser	600	37 440	71.8	3 190	37 520	72.0	3 190	37 580	72.1	3 190
EC350ENL Hybrid										
		6.45 m boom (HD), 2.6 m arm (HD), 1675 kg bucket, 7 000 kg counterweight			6.45 m boom (HD), 3.2 m arm (HD), 1675 kg bucket, 7 000 kg counterweight			6.45 m boom (HD), 3.9 m arm (GP), 1675 kg bucket, 7 000 kg counterweight		
Triple grouser	600	36 540	70.1	2 990	36 620	70.2	2 990	36 740	70.5	2 990
	600 (HD)	36 580	70.2	2 990	36 670	70.3	2 990	36 790	70.6	2 990
	700	37 170	61.1	3 090	37 250	61.2	3 090	37 370	61.4	3 090
	800	37 560	54.0	3 190	37 640	54.2	3 190	37 760	54.3	3 190
	900	37 950	48.5	3 290	38 030	48.6	3 290	38 150	48.8	3 290
Double grouser	600	37 240	71.4	2 990	37 320	71.6	2 990	37 440	71.8	2 990
		6.45 m boom (GP), 2.6 m arm (HD), 1675 kg bucket, 7 000 kg counterweight			6.45 m boom (GP), 3.2 m arm (GP), 1675 kg bucket, 7 000 kg counterweight			6.45 m boom (GP), 3.9 m arm (GP), 1675 kg bucket, 7 000 kg counterweight		
Triple grouser	600	36 260	69.6	2 990	36 240	69.5	2 990	36 460	69.9	2 990
	600 (HD)	36 300	69.6	2 990	36 280	69.6	2 990	36 500	70.0	2 990
	700	36 880	60.6	3 090	36 860	60.6	3 090	37 080	61.0	3 090
	800	37 280	53.6	3 190	37 260	53.6	3 190	37 480	53.9	3 190
	900	37 660	48.2	3 290	37 640	48.1	3 290	37 870	48.4	3 290
Double grouser	600	36 950	70.9	2 990	36 930	70.8	2 990	37 160	71.3	2 990

BUCKET SELECTION GUIDE

Bucket type				Capacity	Cutting width	Weight	Teeth	EC350EL Hybrid			EC350ENL Hybrid		
								600 mm shoe, 7 000 kg counterweight			600 mm shoe, 7 000 kg counterweight		
								6.45 m HD Boom			6.45 m GP Boom		
				L	mm	kg	EA	2.6 m Arm	3.2 m Arm	3.9 m Arm	2.6 m Arm	3.2 m Arm	3.9 m Arm
Direct Fit Buckets	Without Quick Coupler	V4	GP	870	750	1082	3	C	C	C	C	C	C
				1000	900	1281	4	C	C	C	C	C	C
				1420	1200	1514	5	C	C	C	C	C	C
				1670	1350	1629	5	C	C	C	C	C	B
				1920	1500	1769	5	C	C	B	C	B	A
				2330	1750	1967	5	B	B	A	B	A	X
			HD	870	750	1352	3	D	D	D	D	D	D
				1000	900	1425	4	D	D	D	D	D	D
				1420	1200	1679	4	D	D	D	D	D	D
				1420	1200	1699	5	D	D	D	D	D	D
Quick Coupler Buckets	U type quick coupler	V4	GP	1670	1380	1821	5	D	D	C	D	C	B
				1920	1500	1970	5	D	C	B	C	B	A
				870	750	1082	3	C	C	C	C	C	C
				1000	900	1281	4	C	C	C	C	C	C
				1420	1200	1514	5	C	C	C	C	C	B
			HD	1670	1350	1629	5	C	C	B	C	B	A
				1920	1500	1769	5	C	B	A	B	A	X
				2330	1750	1967	5	A	A	X	A	X	X
				870	750	1352	3	D	D	D	D	D	D
				1000	900	1425	4	D	D	D	D	D	D
	S-quick coupler	V4	GP	1420	1200	1699	5	D	D	B	D	C	A
				1670	1380	1821	5	D	B	A	B	B	A
				1920	1500	1970	5	B	A	X	A	A	X
				1000	900	1328	4	C	C	C	C	C	C
				1180	1050	1419	4	C	C	C	C	C	C
			HD	1420	1200	1571	5	C	C	C	C	C	B
				1670	1350	1686	5	C	C	B	C	B	A
				1920	1500	1809	5	C	B	A	B	A	A
				2330	1750	1918	5	B	A	X	A	X	X

Please consult with your Volvo dealer for the proper match of buckets and attachments to suit the application.

(In case of using bigger bucket than regional standard MRS, consultation with R&D is highly recommended)

The recommendations are given as a guide only, based on typical operation conditions.

Bucket capacity based on ISO 7451, heaped material with a 1:1 angle of repose.

Maximum load : Payload, bucket and additional tools such as quick coupler, rotator,...

Maximum material density

A	1 200~1 300 kg/m ³	Coal, Caliche, Shale
B	1 400~1 600 kg/m ³	Wet earth and clay, Limestone, Sandstone
C	1 700~1 800 kg/m ³	Granite, Wet sand, Well blasted rock
D	> 1 900 kg/m ³	Wet mud, Iron ore
X	Not recommended	

Specifications

LIFTING CAPACITY EC350EL Hybrid

Lifting capacity at the arm end without bucket.

For lifting capacity including bucket, simply subtract actual weight of the direct fit bucket or the bucket with quick coupler from the following values.

	Lifting point	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		Max. reach					
		Along UC	Across UC	Along UC	Across UC	m													
Boom : 6.45 m HD Arm : 2.6 m HD Shoe : 600 mm CWT : 7 000 kg	7.5 m kg														*9 170	8 120	7.0		
	6.0 m kg							*9 720	*9 720	*9 100	7 210				*9 100	6 490	8.0		
	4.5 m kg					*14 200	*14 200	*11 080	9 860	*9 630	7 000				8 710	5 660	8.5		
	3.0 m kg							*12 690	9 290	*10 420	6 720				8 130	5 250	8.8		
	1.5 m kg							*14 010	8 830	10 180	6 470				7 970	5 120	8.8		
	0 m kg					*19 980	12 970	13 990	8 580	10 000	6 310				8 230	5 250	8.6		
	-1.5 m kg					*14 400	*14 400	*19 240	13 020	13 930	8 520	9 970	6 280		9 010	5 730	8.1		
	-3.0 m kg					*23 080	*23 080	*17 500	13 240	*13 380	8 650				*10 630	6 810	7.2		
	-4.5 m kg					*18 270	*18 270	*14 030	13 710						*10 550	9 500	5.8		
Boom : 6.45 m HD Arm : 3.2 m HD Shoe : 600 mm CWT : 7 000 kg	7.5 m kg														*8 230	7 420			
	6.0 m kg														*8 340	7 350			
	4.5 m kg					*12 680	*12 680	*10 230	10 070	*9 010	7 110	*8 040	5 250	*7 330	5 170	9.1			
	3.0 m kg					*16 270	14 380	*11 950	9 450	*9 900	6 800	7 910	5 120	7 450	4 810	9.3			
	1.5 m kg					*18 910	13 390	*13 470	8 930	10 220	6 510	7 760	4 970	7 310	4 690	9.4			
	0 m kg					*19 910	12 980	14 020	8 590	9 990	6 300	7 650	4 880	7 500	4 780	9.1			
	-1.5 m kg					*14 600	*14 600	*19 680	12 910	13 870	8 460	9 890	6 210		8 100	5 150	8.6		
	-3.0 m kg					*17 000	*17 000	*23 050	*23 050	*18 420	13 050	*13 920	8 510	9 970	6 280		9 400	5 950	7.8
	-4.5 m kg					*21 290	*21 290	*15 750	13 410	*11 790	8 780				*10 320	7 780	6.6		
Boom : 6.45 m HD Arm : 3.9 m GP Shoe : 600 mm CWT : 7 000 kg	9.0 m kg														*6 290	*6 290	7.3		
	7.5 m kg														*7 170	*7 170			
	6.0 m kg														*7 480	*7 480	*7 020		
	4.5 m kg							*9 150	*9 150	*8 230	7 240	*7 750	5 350	*5 780	4 640	9.7			
	3.0 m kg					*14 490	*14 490	*10 960	9 670	*9 220	6 900	7 980	5 170	*5 990	4 340	10.0			
	1.5 m kg					*17 660	13 690	*12 700	9 060	*10 220	6 560	7 780	4 990	*6 390	4 220	10.0			
	0 m kg					*9 000	*9 000	*19 400	13 030	*13 950	8 620	10 000	6 300	7 620	4 840	6 730	4 280		
	-1.5 m kg					*9 190	*9 190	*13 740	*13 740	*19 800	12 790	13 810	8 400	9 830	6 140	7 540	4 770		
	-3.0 m kg					*14 330	*14 330	*19 870	*19 870	*19 110	12 820	13 770	8 360	9 810	6 130		8 110	5 130	8.6
Boom : 6.45 m HD Arm : 2.6 m HD Shoe : 800 mm CWT : 7 000 kg	-4.5 m kg					*20 480	*20 480	*24 140	*24 140	*17 190	13 080	*12 940	8 520			*9 700	6 350	7.5	
	-6.0 m kg					*18 140	*18 140	*13 190	*13 190							*9 820	9 520	5.8	
	7.5 m kg														*9 170	8 300	7.0		
	6.0 m kg							*14 210	*14 210	*11 080	10 090	*9 640	7 170			*9 100	6 650	8.0	
	4.5 m kg															8 940	5 810	8.5	
	3.0 m kg															8 350	5 390	8.8	
	1.5 m kg															8 200	5 260	8.8	
	0 m kg															8 460	5 400	8.6	
	-1.5 m kg							*14 440	*14 440	*19 230	13 360	14 310	8 750	10 250	6 460		9 270	5 890	8.1
Boom : 6.45 m HD Arm : 3.2 m HD Shoe : 800 mm CWT : 7 000 kg	-3.0 m kg							*23 060	*23 060	*17 490	13 590	*13 380	8 880				*10 630	7 000	7.2
	-4.5 m kg							*18 240	*18 240	*14 020	*14 020						*10 540	9 760	5.8
	7.5 m kg															*7 460	7 280	7.7	
	6.0 m kg															*7 250	6 000	8.5	
	4.5 m kg															*7 320	5 310	9.1	
	3.0 m kg															*7 630	4 950	9.3	
	1.5 m kg															*7 520	4 820	9.4	
	0 m kg															*7 720	4 920	9.1	
	-1.5 m kg															8 330	5 300	8.6	
Boom : 6.45 m HD Arm : 3.9 m GP Shoe : 800 mm CWT : 7 000 kg	-3.0 m kg															9 680	6 120	7.8	
	-4.5 m kg															*10 320	7 990	6.6	
	9.0 m kg															*6 290	*6 290	7.3	
	7.5 m kg															*5 870	*5 870	8.5	
	6.0 m kg															*5 730	5 320	9.2	
	4.5 m kg															*5 780	4 770	9.7	
	3.0 m kg															*6 000	4 460	10.0	
	1.5 m kg															*6 390	4 340	10.0	
	0 m kg															*6 930	4 410	9.8	
Boom : 6.45 m HD Arm : 3.9 m GP Shoe : 800 mm CWT : 7 000 kg	-1.5 m kg															*7 390	4 680	9.3	
	-3.0 m kg															8 350	5 280	8.6	
	-4.5 m kg															*9 700	6 530	7.5	
	-6.0 m kg															*9 820	9 790	5.8	

Notes: 1. Machine in "Fine Mode-F" (Power Boost) for lifting capacities. 2. The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting Capacity Standards. 3. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. 4. Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.

LIFTING CAPACITY EC350ENL Hybrid

Lifting capacity at the arm end without bucket.

For lifting capacity including bucket, simply subtract actual weight of the direct fit bucket or the bucket with quick coupler from the following values.

	Lifting point	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		Max. reach						
		Along UC	Across UC	Along UC	Across UC	m														
Boom : 6.45 m GP Arm : 2.6 m HD Shoe : 600 mm CWT : 7 000 kg	7.5 m kg														*9 220	7 500	7.0			
	6.0 m kg							*9 760	9 560	*9 150	6 660				*9 150	6 000	8.0			
	4.5 m kg					*14 260	13 930	*11 130	9 080	*9 690	6 470				8 680	5 230	8.5			
	3.0 m kg							*12 770	8 540	10 420	6 200				8 110	4 850	8.8			
	1.5 m kg							*14 100	8 110	10 150	5 970				7 960	4 720	8.8			
	0 m kg					*20 130	11 810	13 980	7 870	9 990	5 820				8 220	4 850	8.6			
	-1.5 m kg			*14 400	*14 400	*19 390	11 860	13 920	7 820	9 960	5 790				9 000	5 290	8.1			
	-3.0 m kg			*23 280	*23 280	*17 640	12 070	*13 490	7 950						*10 720	6 280	7.2			
	-4.5 m kg			*18 460	*18 460	*14 170	12 510								*10 650	8 740	5.8			
Boom : 6.45 m GP Arm : 3.2 m GP Shoe : 600 mm CWT : 7 000 kg	7.5 m kg									*8 290	6 860				*7 380	6 590	7.7			
	6.0 m kg									*8 410	6 800				*7 180	5 430	8.5			
	4.5 m kg					*12 790	*12 790	*10 320	9 300	*9 090	6 580	*7 960	4 870	*7 250	4 800	9.1				
	3.0 m kg					*16 480	13 220	*12 090	8 750	*10 010	6 310	7 910	4 750	7 450	4 470	9.3				
	1.5 m kg					*19 190	12 350	*13 660	8 280	10 240	6 050	7 770	4 620	7 320	4 350	9.4				
	0 m kg					*20 220	11 990	14 100	7 980	10 030	5 860	7 670	4 530	7 520	4 440	9.1				
	-1.5 m kg			*14 520	*14 520	*20 000	11 920	13 960	7 860	9 940	5 780			8 120	4 780	8.6				
	-3.0 m kg			*16 920	*16 920	*22 970	*22 970	*18 720	12 040	14 010	7 910	10 000	5 840		9 430	5 530	7.8			
	-4.5 m kg					*21 710	*21 710	*16 020	12 360	*11 980	8 140				*10 480	7 220	6.6			
Boom : 6.45 m GP Arm : 3.9 m GP Shoe : 600 mm CWT : 7 000 kg	9.0 m kg														*6 290	*6 290	7.3			
	7.5 m kg											*7 200	7 070			*5 870	5 690	8.4		
	6.0 m kg											*7 510	6 950	*7 020	5 040	*5 730	4 790	9.2		
	4.5 m kg							*9 190	*9 190	*8 280	6 690	*7 800	4 940	*5 780	4 280	9.7				
	3.0 m kg					*14 560	13 590	*11 020	8 890	*9 280	6 360	7 950	4 770	*5 990	4 000	10.0				
	1.5 m kg					*17 770	12 460	*12 780	8 310	10 260	6 040	7 760	4 590	*6 390	3 890	10.0				
	0 m kg			*9 000	*9 000	*19 530	11 850	14 040	7 910	9 970	5 790	7 610	4 460	6 720	3 940	9.8				
	-1.5 m kg			*9 190	*9 190	*13 740	*13 740	*19 950	11 630	13 790	7 700	9 810	5 650	7 540	4 390	7 170	4 190	9.3		
	-3.0 m kg			*14 330	*14 330	*19 870	*19 870	*19 260	11 660	13 760	7 670	9 800	5 640		8 100	4 730	8.6			
Boom : 6.45 m GP Arm : 2.6 m HD Shoe : 700 mm CWT : 7 000 kg	-4.5 m kg			*20 480	*20 480	*24 360	23 510	*17 340	11 910	*13 040	7 820				*9 780	5 850	7.5			
	-6.0 m kg					*18 340	*18 340	*13 320	12 430						*9 920	8 740	5.8			
	7.5 m kg														*9 220	7 600	7.0			
	6.0 m kg							*9 760	9 690	*9 150	6 760				*9 150	6 090	8.0			
	4.5 m kg					*14 280	14 110	*11 140	9 210	*9 690	6 560				8 820	5 320	8.5			
	3.0 m kg							*12 770	8 670	*10 490	6 300				8 240	4 930	8.8			
	1.5 m kg							*14 110	8 240	10 320	6 060				8 100	4 800	8.8			
Boom : 6.45 m GP Arm : 3.2 m GP Shoe : 700 mm CWT : 7 000 kg	0 m kg					*20 130	12 000	14 210	8 000	10 160	5 920				8 360	4 930	8.6			
	-1.5 m kg					*14 440	*14 440	*19 380	12 050	14 150	7 950	10 130	5 890		9 160	5 380	8.1			
	-3.0 m kg					*23 270	*23 270	*17 630	12 260	*13 490	8 080				*10 720	6 390	7.2			
	-4.5 m kg					*18 430	*18 430	*14 150	12 710						*10 650	8 890	5.8			
	7.5 m kg														*7 380	6 680	7.7			
	6.0 m kg														*7 180	5 510	8.5			
	4.5 m kg					*12 810	*12 810	*10 320	9 420	*9 090	6 680	*7 980	4 940	*7 250	4 870	9.1				
Boom : 6.45 m GP Arm : 3.9 m GP Shoe : 700 mm CWT : 7 000 kg	3.0 m kg					*16 490	13 410	*12 090	8 880	*10 020	6 400	8 050	4 830	*7 560	4 540	9.3				
	1.5 m kg					*19 200	12 540	*13 660	8 410	10 410	6 140	7 900	4 700	7 450	4 430	9.4				
	0 m kg					*20 220	12 180	14 340	8 110	10 200	5 960	7 810	4 610	7 650	4 520	9.1				
	-1.5 m kg					*14 550	*14 550	*20 000	12 110	14 200	7 990	10 110	5 880		8 270	4 870	8.6			
	-3.0 m kg					*16 950	*16 950	*23 000	*23 000	*18 710	12 230	*14 130	8 040	10 180	5 930		9 600	5 630	7.8	
	-4.5 m kg							*21 690	*21 690	*16 010	12 550	*11 960	8 270			*10 480	7 340	6.6		
	9.0 m kg														*6 290	*6 290	7.3			
	7.5 m kg														*5 870	5 770	8.5			
	6.0 m kg														*7 520	7 040	*7 030	5 120	*5 730	4 870
Boom : 6.45 m GP Arm : 3.9 m GP Shoe : 700 mm CWT : 7 000 kg	4.5 m kg							*9 190	*9 190	*8 280	6 780	*7 800	5 010	*5 780	4 350	9.7				
	3.0 m kg					*14 580	13 770	*11 030	9 010	*9 280	6 460	8 080	4 850	*6 000	4 070	10.0				
	1.5 m kg					*17 780	12 650	*12 790	8 440	*10 290	6 140	7 890	4 670	*6 390	3 960	10.0				
	0 m kg					*9 020	*9 020	*19 530	12 030	*14 050	8 030	10 140	5 890	7 740	4 530	6 850	4 010	9.8		
	-1.5 m kg					*9 210	*9 210	*13 760	*13 760	*19 950	11 820	14 030	7 820	9 990	5 750	7 670	4 470	7 300	4 260	9.3
	-3.0 m kg					*14 350	*14 350	*19 900	*19 900	*19 260	11 850	13 990	7 800	9 970	5 730		8 250	4 810	8.6	
	-4.5 m kg					*20 510	*20 510	*24 340	23 870	*17 330	12 100	*13 040	7 950				*9 780	5 950	7.5	
	-6.0 m kg							*18 300	*18 300	*13 300	12 620						*9 920	8 900	5.8	

Notes: 1. Machine in "Fine Mode-F" (Power Boost) for lifting capacities. 2. The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting Capacity Standards. 3. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. 4. Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.

Equipment

STANDARD EQUIPMENT

Engine

Turbocharged, four stroke diesel engine with water cooling, direct injection and charged air cooler that meets EU Stage V requirements
 Air filter with indicator
 Air intake heater
 Cyclone pre-cleaner
 Electric engine shut-off
 Fuel filter and water separator
 Fuel filler pump: 50 l/min, with automatic shut-off
 Alternator, 120 A

Hybrid

Accumulator, 26 l
 Boom regeneration valves
 Assist motor
 Main pump with PTO

Electric / Electronic control system

Advanced mode control system
 Self-diagnostic system
 Machine status indication
 Engine speed sensing power control
 Automatic idling system
 Onetouch power boost
 Safety stop/start function
 Adjustable LCD color monitor
 Master electrical disconnect switch
 Engine restart prevention circuit
 High-capacity LED lights:
 - Frame-mounted 2
 - Boom-mounted 2
 Batteries, 2 x 12 V / 200 Ah
 Start motor, 24 V / 5.5 kW

Frame

Access way with handrail
 Tool storage area
 Punched metal anti-slip plates
 Counterweight: 7 000 kg

Undercarriage

Undercover (heavy-duty)
 Hydraulic track adjusters
 Greased and sealed track link
 Track Guard

Hydraulic system

Boom up swing priority function
 Boom travel priority function (Creep)
 Boom down speed control
 Hose rupture valve: boom & arm
 Overload warning device
 Automatic sensing hydraulic system
 - Summation system
 - Boom priority
 - Arm priority
 - Swing priority
 ECO mode fuel saving technology
 Boom, arm and bucket regeneration valves
 Swing anti-rebound valves
 Boom and arm holding valves
 Multistage filtering system
 Cylinder cushioning
 Cylinder contamination seals
 Auxiliary hydraulic valve
 Automatic twospeed travel motors
 Hydraulic oil, ISO VG 46

STANDARD EQUIPMENT

Cab and interior

ROPS (ISO 12117-2) certified cab
 Silicon oil and rubber mounts with spring
 Travel pedals and hand levers
 Adjustable operator seat and joystick control console
 Proportional joysticks with 3 switches each
 Heater & air-conditioner, automatic
 Flexible antenna
 Radio with MP3 & USB Jack with bluetooth
 Hydraulic safety lock lever
 Cab, allweather sound suppressed, includes:
 - Cup holders
 - Door locks
 - Tinted glass
 - Floor mat
 - Horn
 - Large storage area
 - Pull-up type front window
 - Removable lower windshield
 - Seat belt
 - Safety glass
 - Sun screens, front, roof, rear
 - Rain shield
 - Windshield wiper with intermittent feature

Rear view camera

Side view camera

Master key

Track shoes

600 mm with triple grousers

Digging equipment

Boom: 6.45 m
 Arm: 3.2 m
 Manual centralized lubrication

OPTIONAL EQUIPMENT

Engine

Block heater: 240 V
 Oil bath pre-cleaner
 Diesel coolant heater, 10 kW
 Water separator with heater
 Auto engine shutdown
 Reversible fan
 Delayed engine shutdown

Electric

Extra work lights (Halogen or LED):
 - Cab-mounted 3
 - Boom-mounted 2
 - Counterweight-mounted 1

Green light beacon

Travel alarm

Anti-theft system

Rotating warning beacon

Frame

Foldable Cabin Entrance

Foldable Walkway

Undercarriage

Full track guard

OPTIONAL EQUIPMENT	
Hydraulic system	
CDC, Comfort Driving Control	
Boom float function	
Attachment management system (up to 32 programmable memories)	
- Variable flow and pressure pre-setting	
Hammer & shear, 1 and 2 pump flow	
Additional return filter	
Hydraulic piping:	
- Slope & rotator	
- Grapple	
- Oil leak (drain) line	
Quick coupler piping	
Volvo hydraulic quick coupler S3	
Volvo hydraulic quick coupler U38	
Hydraulic oil, biodegradable 46	
Hydraulic oil, longlife oil 32	
Hydraulic oil, longlife oil 46	
Hydraulic oil, longlife oil 68	
Fuel tank-fast fuel fill prep	
Straight travel pedal	
Machine control system	
Dig Assist	
Volvo Active Control (Semi-autonomous)	
Please refer to separate Brochure for more details	
OPTIONAL EQUIPMENT	
Cab and interior	
Fabric seat with heater	
Fabric seat with heater and air suspension	
Deluxe seat	
High-strength one piece front windshield (P5A)	
Opening top hatch	
Falling object guard, FOG (fixed type or hinge type)	
- Frame-mounted	
- Cab-mounted	
Cab-mounted falling object protective structure (FOPS)	
Volvo smart view	
Smoker kit (ashtray and lighter)	
Safety net for front window	
Lower wiper with intermittent control	
Anti-vandalism kit	
Specific key	
Cleaning air gun	
Track shoes	
700/800/900 mm with triple grousers	
600 mm HD with triple grousers	
600 mm with double grousers	
Digging equipment	
Boom: 6.45 m HD	
Arm: 2.6 m HD, 3.2 m HD, 3.9 m	
Linkage with lifting eye	
Service	
Tool kit, daily maintenance	
Tool kit, full scale	

SELECTION OF VOLVO OPTIONAL EQUIPMENT

Foldable walkways and foldable cab entrance



Air gun



Deluxe seat



Comfort Drive Control



High-strength one-piece front windshield



Not all products are available in all markets. Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine.

V O L V O