

Volvo BM L120C

Waste Handler



- *Bucket size: 4.5 m³ c/w trash guard*
- *Operating weight: 23020 kg*
- *Load over height: 5090 mm*
- *Forward reach: 1730 mm*
- *X Mine D2 23.5 R25 tyres c/w tyre fill*
- *Hydraulically operated belly protection plates*
- *Full windscreen protection*
- *Protection for driving and work lights*
- *Additional brake light*
- *Air conditioning*
- *Hydraulic attachment Bracket*

Optional Equipment


- *Fire suppression system*
- *Fixed belly plates*

VOLVO BM

OPERATIONAL DATA & DIMENSIONS

Where applicable, specifications and dimensions are in accordance with ISO 7131, SAE J732, ISO 7546, SAE J742, ISO 5998, SAE J918, ISO 8313.

Tyres: 23.5 R25 X Mine D2 + tyre fill

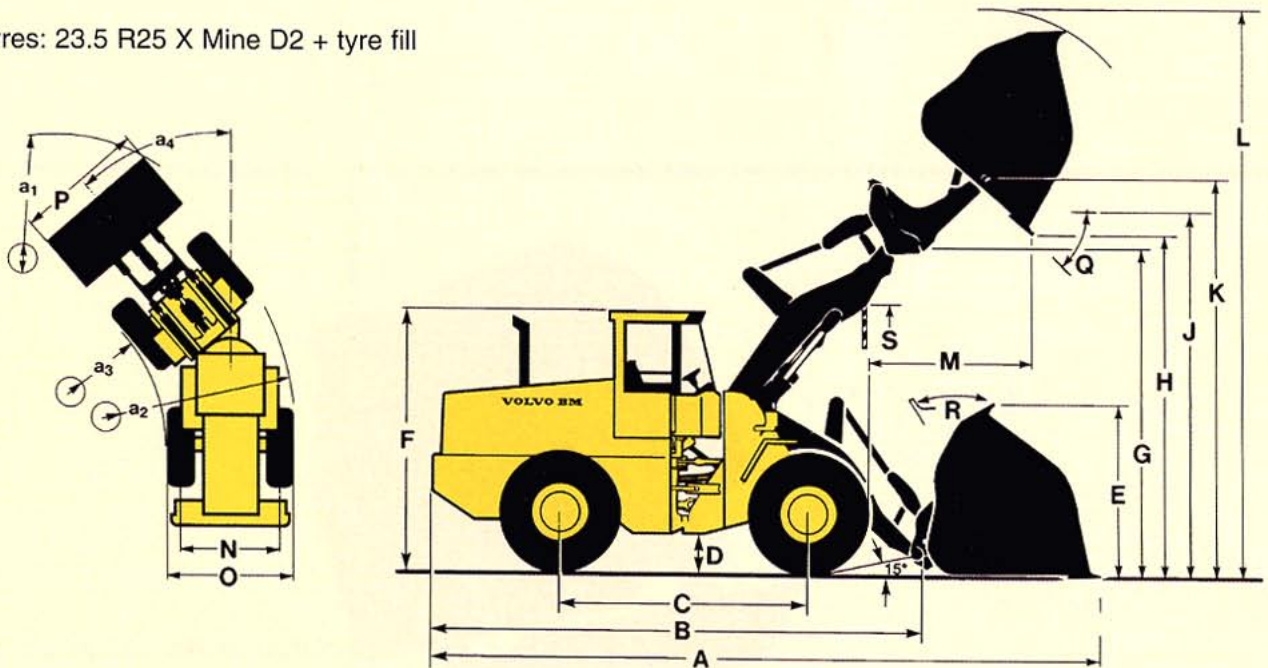

Operating weight : 23020 kg

Bucket volume (heaped) : 4.5m³

Static tipping load straight: 11890 kg

Static tipping at full turn : 9830 kg

Safe working load : 4915 kg

Max. material density : 1090 kg/m³

A	9200mm	M	1730mm
B	6510mm	N	2060mm
C	3200mm	O	2680mm
D	440mm	P	2850mm
E	1930mm	Q	45°
F	3350mm	R	50°
G	4650mm	S	4310mm
H	5090mm	a ₁	14100mm
J	4370mm	a ₂	5730mm
K	5720mm	a ₃	3060mm
L	7500mm	a ₄	± 40°

Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine.

Volvo Construction Equipment GB Ltd

DUXFORD, CAMBRIDGE CB2 4QX. TEL: 01223 836636. FAX: 01223 832799